


Silicon PNP transistor in a TO-92LM Plastic Package.

High DC current gain and excellent  $h_{FE}$  linearity, low saturation voltage.

Strobe flash, medium power amplifier applications.




PIN1 Base      PIN 2 Collector      PIN 3 Emitter


$h_{FE}$ Classifications Symbol	A	B	C
$h_{FE}$ Range	140~280	200~400	300~600

---

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

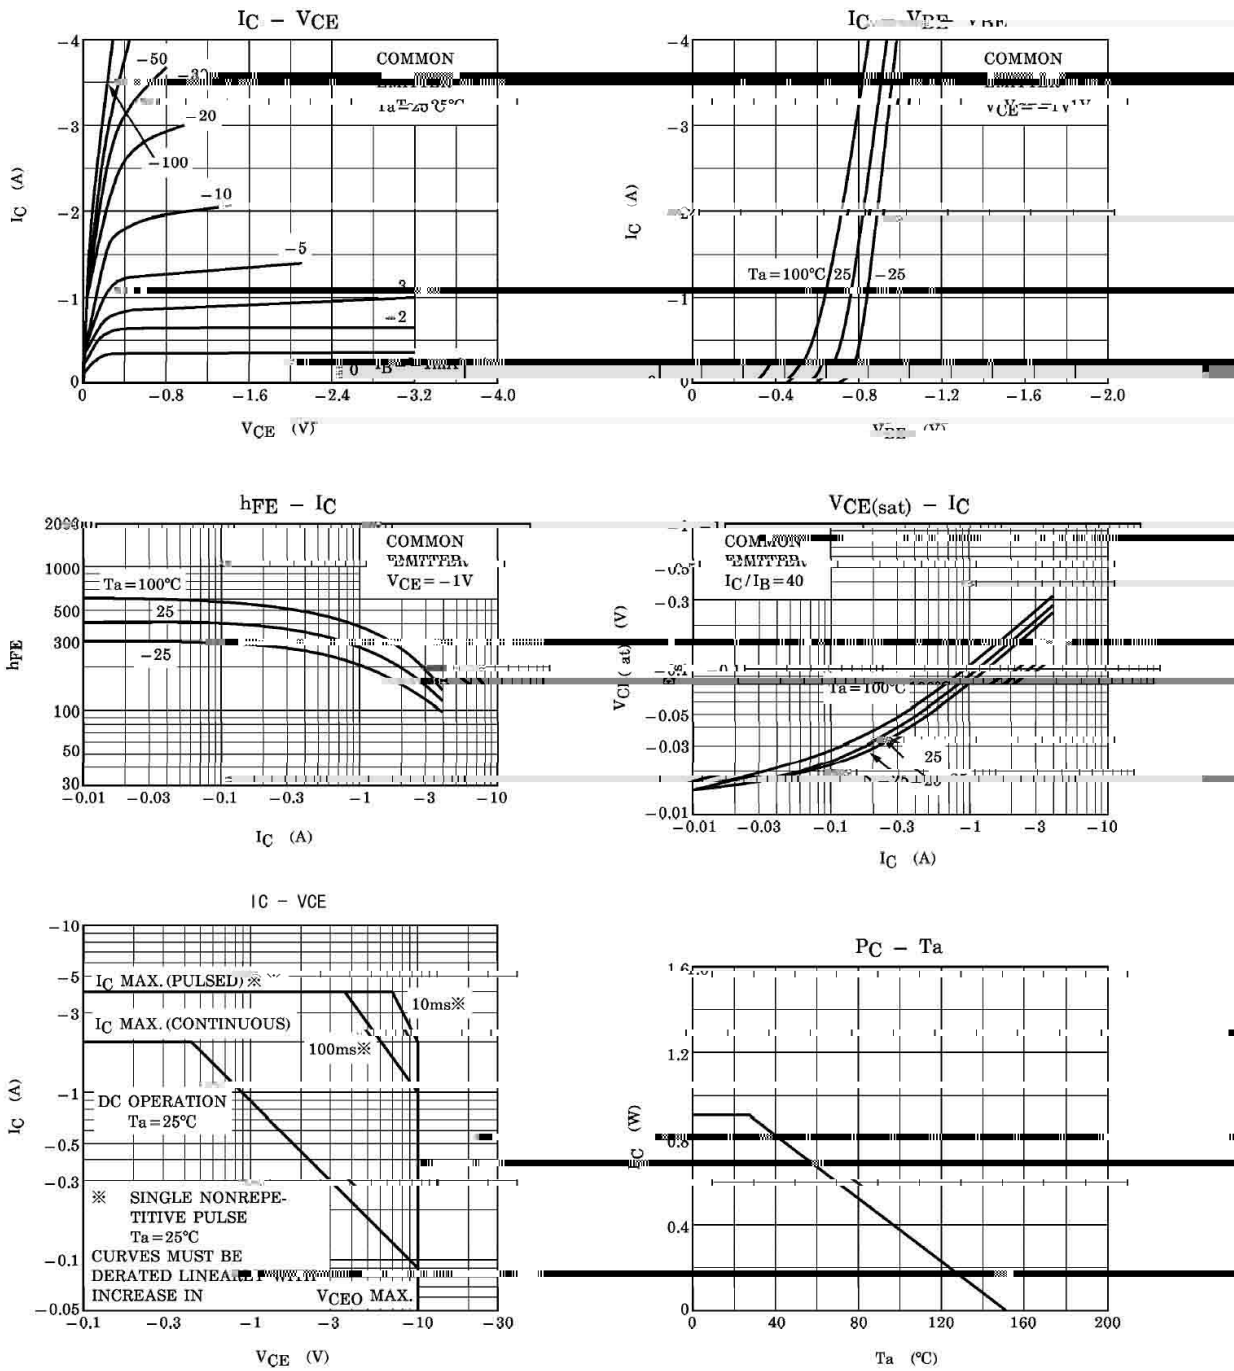






Note:

BR: Company Code.

A1160: Product Type.

C:  $h_{FE}$  Classifications Symbol

\*\*\*\*: Lot No. Code,code change with Lot No.

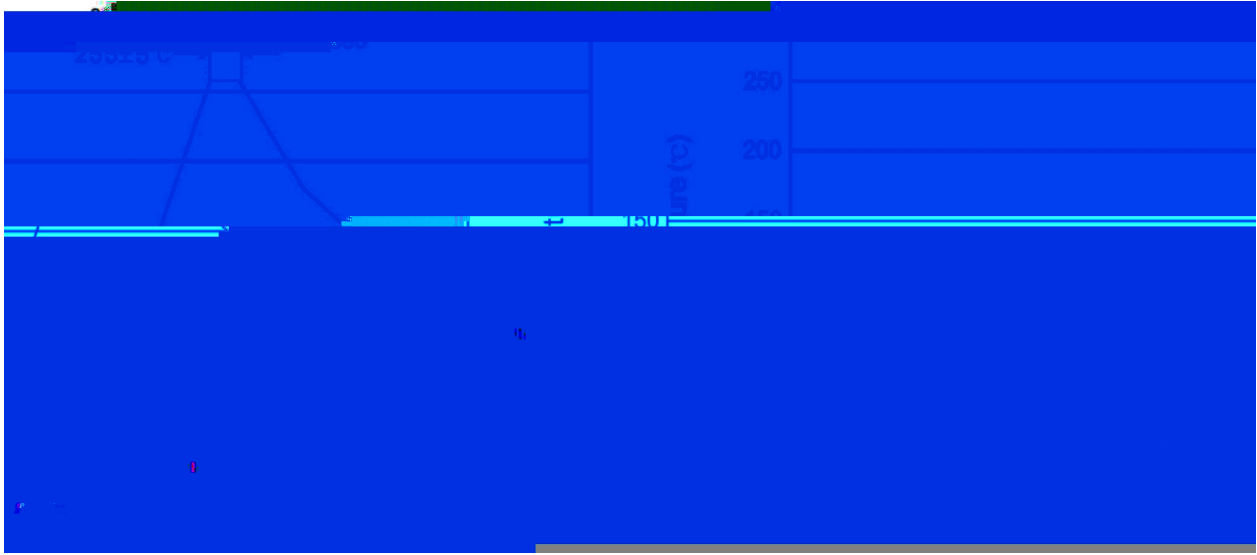

- 1            25 150            60 90sec;
- 2            255 5                    5 0.5sec;
- 3                            2 10 /sec.

Note:

- 1.Preheating:25~150 , Time:60~90sec.
- 2.Peak Temp.:255 5 , Duration:5 0.5sec.
- 3. Cooling Speed: 2~10 /sec.

\*

5 5