

“Y

SOT-89 PNP Silicon PNP transistor in a SOT-89 Plastic Package.

• Ę


2SD2185

Low $V_{CE(sat)}$, complementary to 2SD2185.

v

For low frequency output amplification.

л ~ α =



ã / ũ




PIN1 Base PIN 2 Collector PIN 3 Emitter

т. н ъ

h_{FE} Classifications Symbol	R	S
h_{FE} Range	120 240	170 340
Marking	H1IR * *	H1IS * *

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-50	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current-Continuous	I_C	-2.0	A
Collector Current -Continuous(Pulse)	I_{CP}	-3.0	A
Collector Power Dissipation*	$*P_C$	1.0	W
Junction Temperature	T_j	150	


β 3A'E M f

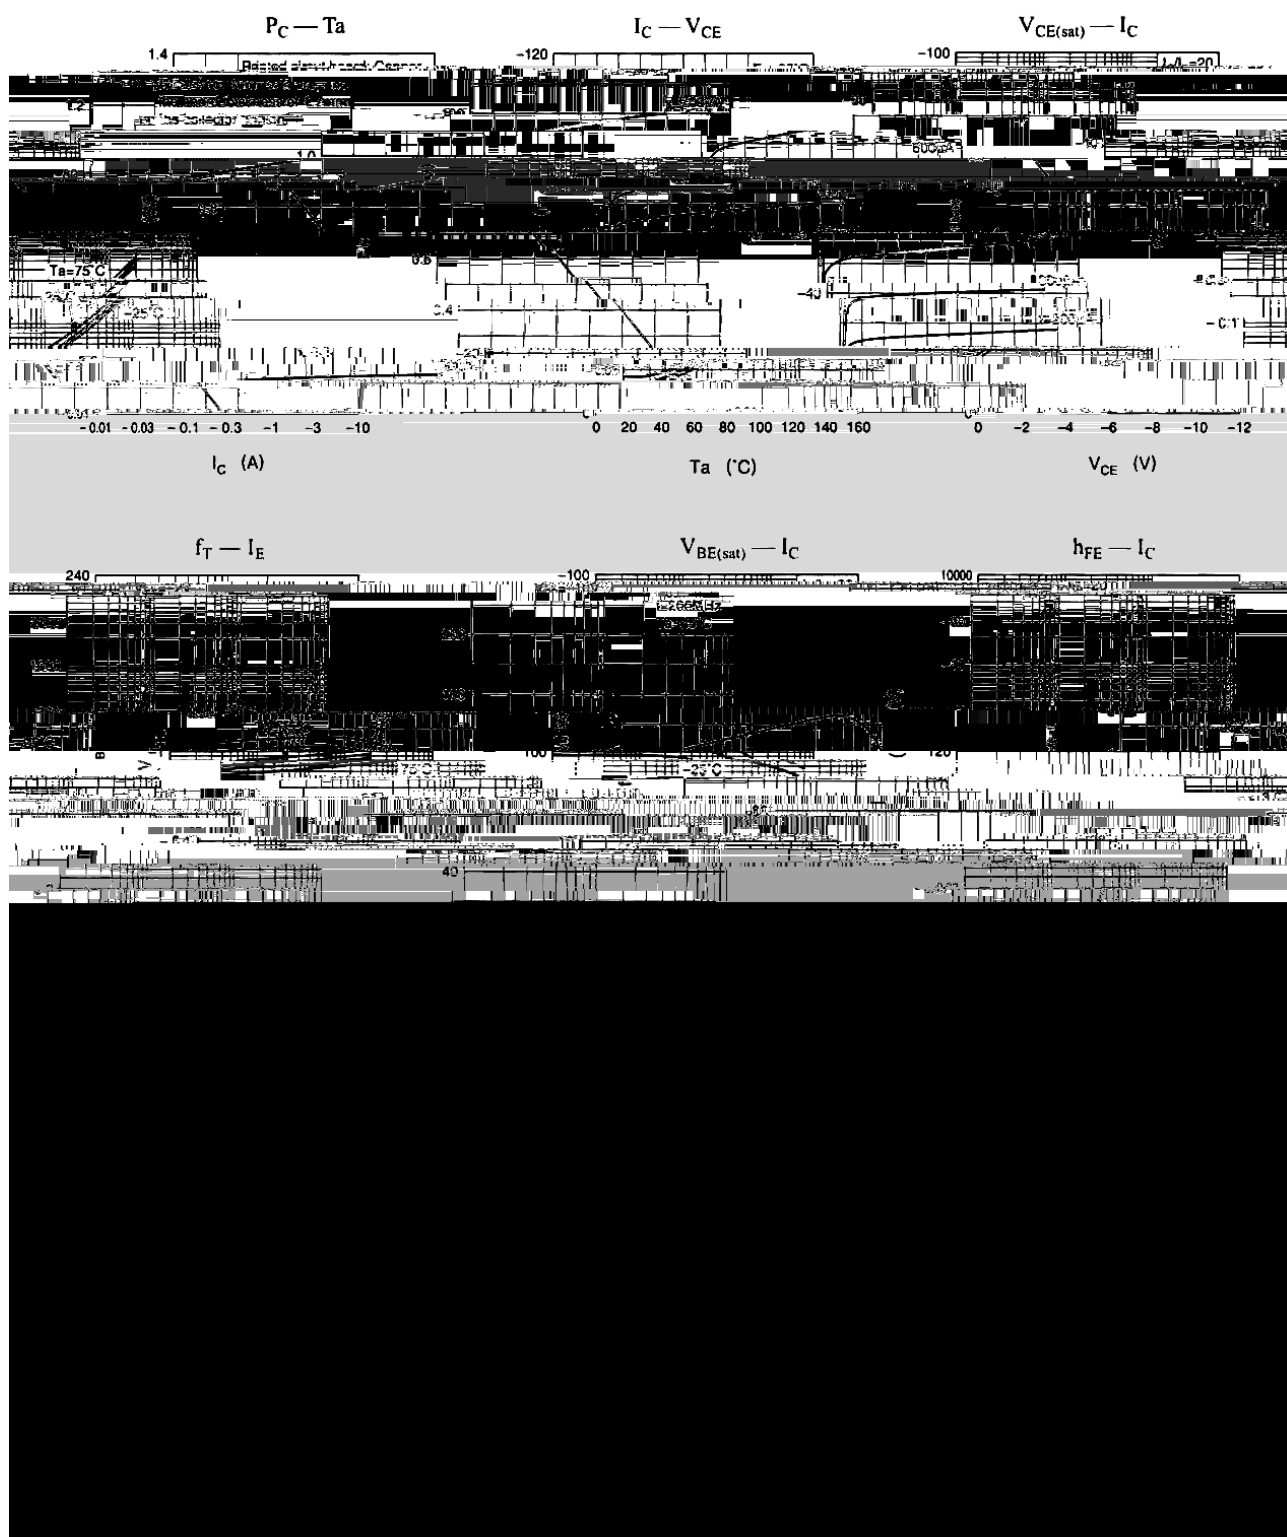

尺寸标注


SOT-89

单位：mm

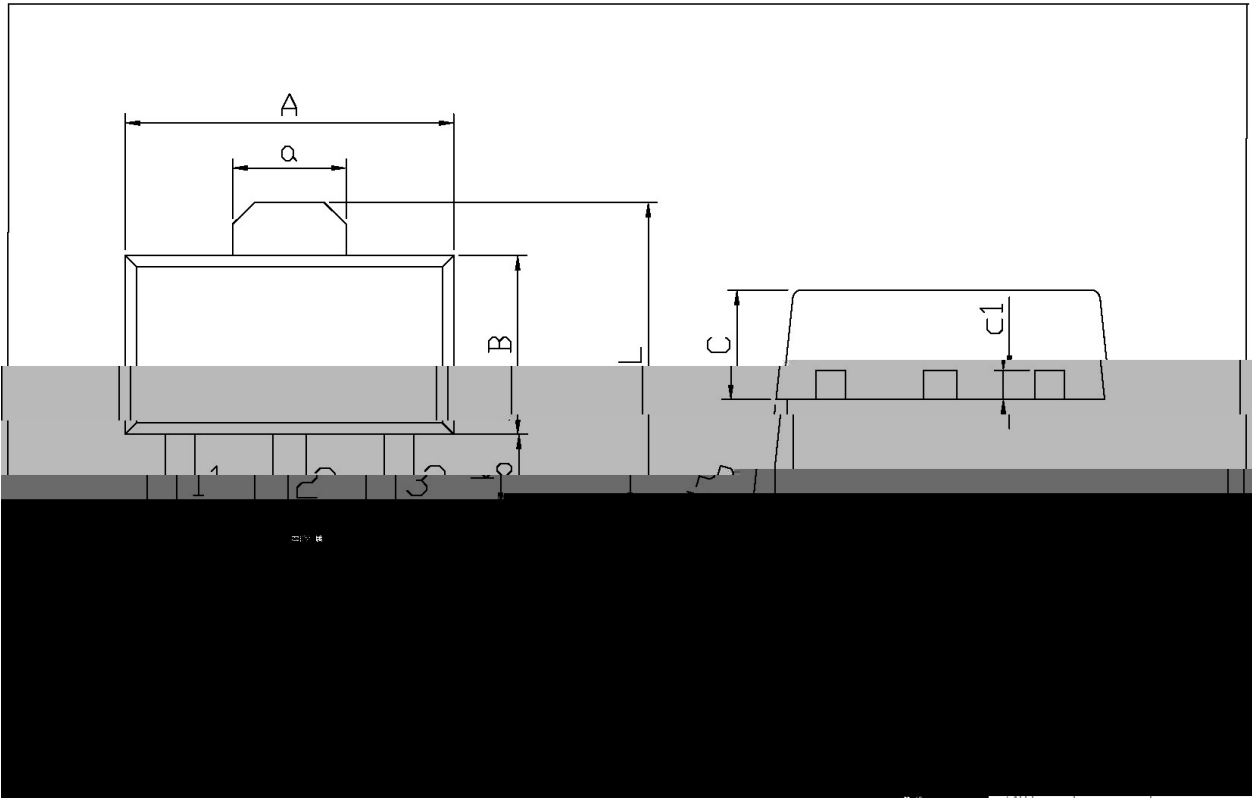

Symbol	Dimensions in millimeters		Symbol	Dimensions in millimeters	
	Min	Max		Min	Max
A	4.4	4.7	a1	0.36	0.56
B	2.35	2.65	a2	0.30	0.50
L	3.878	4.478	C	1.40	1.70

1. 2

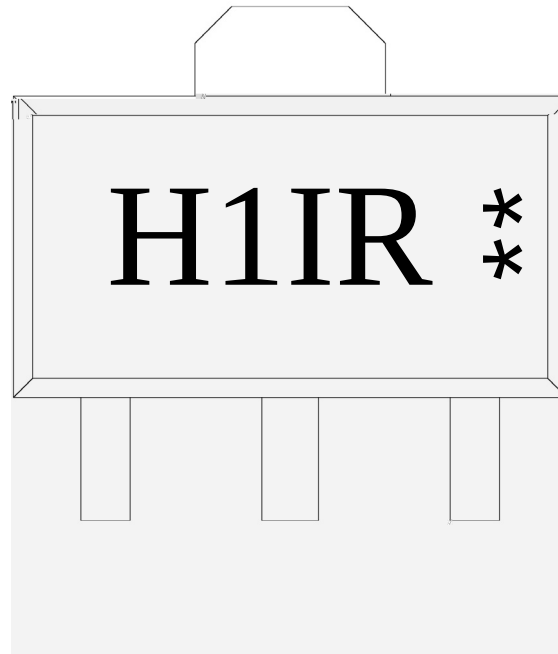

H

1I

R: h_{FE}

**

Note:


H: Company Code.

1I: Product Type.

R: h_{FE} Classifications Symbol

**: Lot No. Code, code change with Lot No.

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulq j+Se0l uhh,

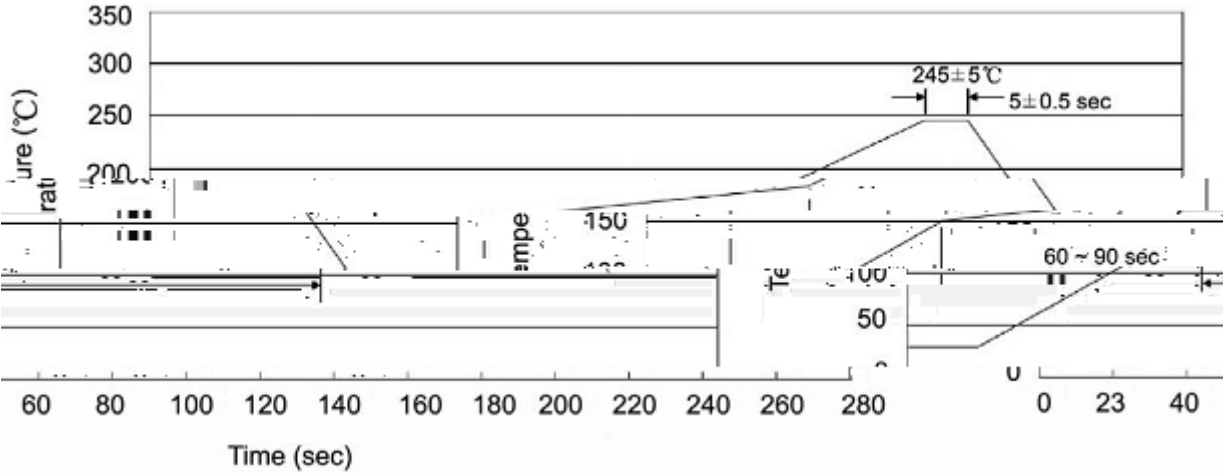

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

Y T

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

—

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

Ω