

/ h_{FE} Classification Making

/ Absolute Maximum Ratings(Ta=25)

| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

/ Electrical Characteristics(Ta=25)


| | | | | | | |
|--|--|---|--|--|--|---|
| | | | | | | |
| | | μ | | | | |
| | | | | | | |
| | | μ | | | | |
| | | | | | | μ |
| | | | | | | μ |
| | | | | | | |
| | | | | | | |
| | | | | | | |

2SB739

/ Package Dimensions


TO-92LM

Unit: mm

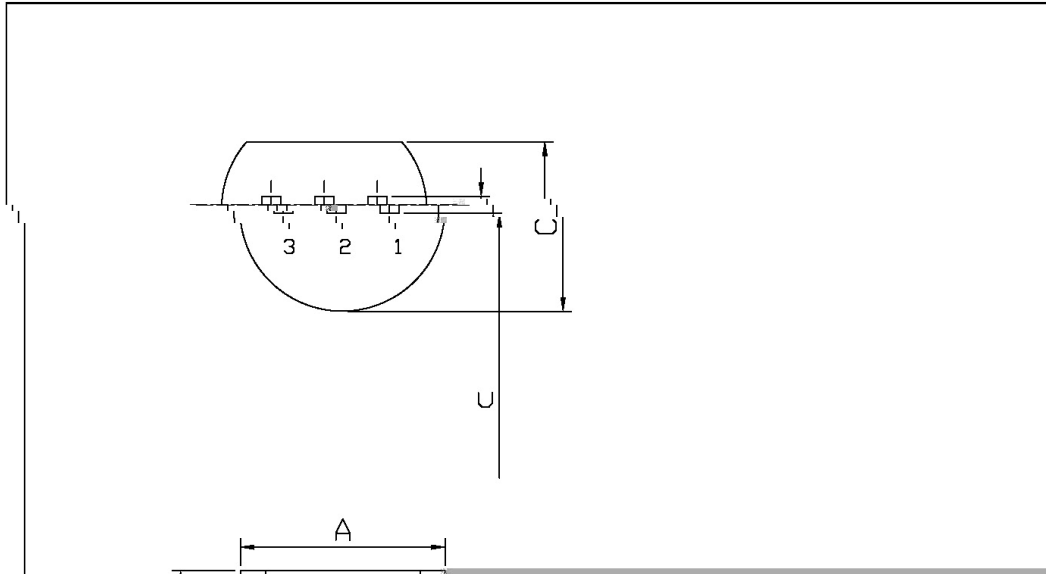


| Symbol | Dimensions In Millimeters | |
|------------------|---------------------------|------|
| | Min | Max |
| A | 4.47 | 5.1 |
| C | 1.27 | 1.52 |
| U | 2.54 | 2.79 |
| U ₁ | 1.27 | 1.52 |
| U ₂ | 1.27 | 1.52 |
| U ₃ | 1.27 | 1.52 |
| U ₄ | 1.27 | 1.52 |
| U ₅ | 1.27 | 1.52 |
| U ₆ | 1.27 | 1.52 |
| U ₇ | 1.27 | 1.52 |
| U ₈ | 1.27 | 1.52 |
| U ₉ | 1.27 | 1.52 |
| U ₁₀ | 1.27 | 1.52 |
| U ₁₁ | 1.27 | 1.52 |
| U ₁₂ | 1.27 | 1.52 |
| U ₁₃ | 1.27 | 1.52 |
| U ₁₄ | 1.27 | 1.52 |
| U ₁₅ | 1.27 | 1.52 |
| U ₁₆ | 1.27 | 1.52 |
| U ₁₇ | 1.27 | 1.52 |
| U ₁₈ | 1.27 | 1.52 |
| U ₁₉ | 1.27 | 1.52 |
| U ₂₀ | 1.27 | 1.52 |
| U ₂₁ | 1.27 | 1.52 |
| U ₂₂ | 1.27 | 1.52 |
| U ₂₃ | 1.27 | 1.52 |
| U ₂₄ | 1.27 | 1.52 |
| U ₂₅ | 1.27 | 1.52 |
| U ₂₆ | 1.27 | 1.52 |
| U ₂₇ | 1.27 | 1.52 |
| U ₂₈ | 1.27 | 1.52 |
| U ₂₉ | 1.27 | 1.52 |
| U ₃₀ | 1.27 | 1.52 |
| U ₃₁ | 1.27 | 1.52 |
| U ₃₂ | 1.27 | 1.52 |
| U ₃₃ | 1.27 | 1.52 |
| U ₃₄ | 1.27 | 1.52 |
| U ₃₅ | 1.27 | 1.52 |
| U ₃₆ | 1.27 | 1.52 |
| U ₃₇ | 1.27 | 1.52 |
| U ₃₈ | 1.27 | 1.52 |
| U ₃₉ | 1.27 | 1.52 |
| U ₄₀ | 1.27 | 1.52 |
| U ₄₁ | 1.27 | 1.52 |
| U ₄₂ | 1.27 | 1.52 |
| U ₄₃ | 1.27 | 1.52 |
| U ₄₄ | 1.27 | 1.52 |
| U ₄₅ | 1.27 | 1.52 |
| U ₄₆ | 1.27 | 1.52 |
| U ₄₇ | 1.27 | 1.52 |
| U ₄₈ | 1.27 | 1.52 |
| U ₄₉ | 1.27 | 1.52 |
| U ₅₀ | 1.27 | 1.52 |
| U ₅₁ | 1.27 | 1.52 |
| U ₅₂ | 1.27 | 1.52 |
| U ₅₃ | 1.27 | 1.52 |
| U ₅₄ | 1.27 | 1.52 |
| U ₅₅ | 1.27 | 1.52 |
| U ₅₆ | 1.27 | 1.52 |
| U ₅₇ | 1.27 | 1.52 |
| U ₅₈ | 1.27 | 1.52 |
| U ₅₉ | 1.27 | 1.52 |
| U ₆₀ | 1.27 | 1.52 |
| U ₆₁ | 1.27 | 1.52 |
| U ₆₂ | 1.27 | 1.52 |
| U ₆₃ | 1.27 | 1.52 |
| U ₆₄ | 1.27 | 1.52 |
| U ₆₅ | 1.27 | 1.52 |
| U ₆₆ | 1.27 | 1.52 |
| U ₆₇ | 1.27 | 1.52 |
| U ₆₈ | 1.27 | 1.52 |
| U ₆₉ | 1.27 | 1.52 |
| U ₇₀ | 1.27 | 1.52 |
| U ₇₁ | 1.27 | 1.52 |
| U ₇₂ | 1.27 | 1.52 |
| U ₇₃ | 1.27 | 1.52 |
| U ₇₄ | 1.27 | 1.52 |
| U ₇₅ | 1.27 | 1.52 |
| U ₇₆ | 1.27 | 1.52 |
| U ₇₇ | 1.27 | 1.52 |
| U ₇₈ | 1.27 | 1.52 |
| U ₇₉ | 1.27 | 1.52 |
| U ₈₀ | 1.27 | 1.52 |
| U ₈₁ | 1.27 | 1.52 |
| U ₈₂ | 1.27 | 1.52 |
| U ₈₃ | 1.27 | 1.52 |
| U ₈₄ | 1.27 | 1.52 |
| U ₈₅ | 1.27 | 1.52 |
| U ₈₆ | 1.27 | 1.52 |
| U ₈₇ | 1.27 | 1.52 |
| U ₈₈ | 1.27 | 1.52 |
| U ₈₉ | 1.27 | 1.52 |
| U ₉₀ | 1.27 | 1.52 |
| U ₉₁ | 1.27 | 1.52 |
| U ₉₂ | 1.27 | 1.52 |
| U ₉₃ | 1.27 | 1.52 |
| U ₉₄ | 1.27 | 1.52 |
| U ₉₅ | 1.27 | 1.52 |
| U ₉₆ | 1.27 | 1.52 |
| U ₉₇ | 1.27 | 1.52 |
| U ₉₈ | 1.27 | 1.52 |
| U ₉₉ | 1.27 | 1.52 |
| U ₁₀₀ | 1.27 | 1.52 |

/ Marking Instruct/9.M

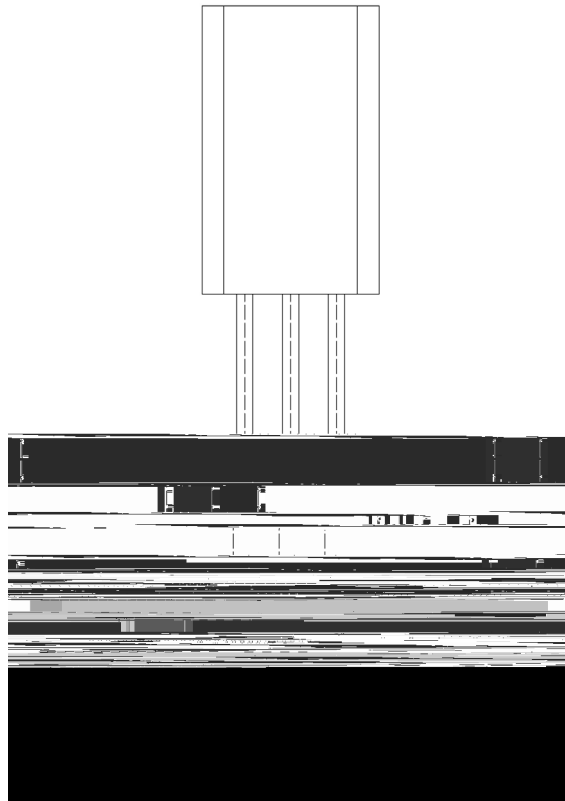

() / Temperature Profile for Dip Soldering(Pb-Free)

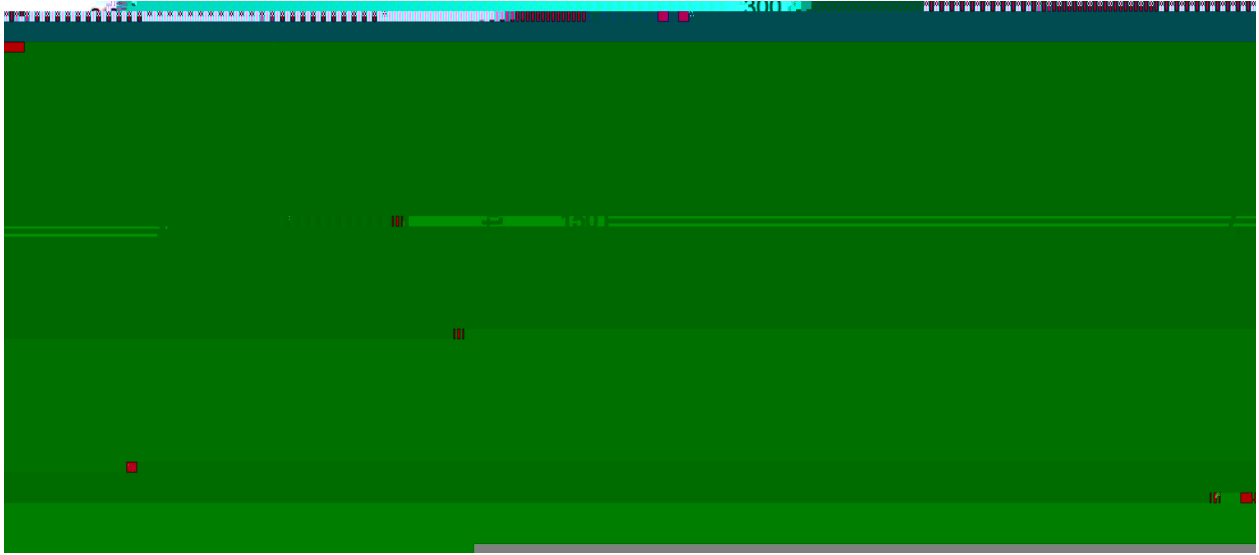

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

| | | | | | | | | |
|--|--|--|--|--|--|--|--|--|
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

| | | | | | | | |
|--|--|--|--|--|--|--|--|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |