

/ Descriptions

TO-220F NPN Silicon NPN transistor in a TO-220F Plastic Package.


/ Features

High V_{CE0} , small I_{CBO} and $V_{CE(sat)}$.

/ Applications

Color TV deflection speed modulating and high-frequency general purpose amplifiers.

/ Equivalent Circuit



/ Pinning



PIN1 Base PIN 2 Collector PIN 3 Emitter

/ h_{FE} Classifications & Marking


h_{FE} Classifications Symbol	R	O
h_{FE} Range	60 140	100 240

/ Absolute Maximum Ratings(Ta=25)


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	180	V
Collector to Emitter Voltage	V_{CEO}	160	V
Emitter to Base Voltage	V_{EBO}	6.0	V
Collector Current - Continuous	I_C	1.5	A
Collector Power Dissipation	P_C	1.5	W
Collector Power Dissipation	$P_C(T_c=25)$	25	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

/ Electrical Characteristics(Ta=25)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=180V$ $I_E=0$			10	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=6.0V$ $I_C=0$			10	μA
DC Current Gain	h_{FE}	$V_{CE}=5.0V$ $I_C=200mA$	60		240	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500mA$ $I_B=50mA$			1.0	V
Transition Frequency	f_T	$V_{CE}=10V$ $I_C=50mA$	50			MHz



/ Package Dimensions

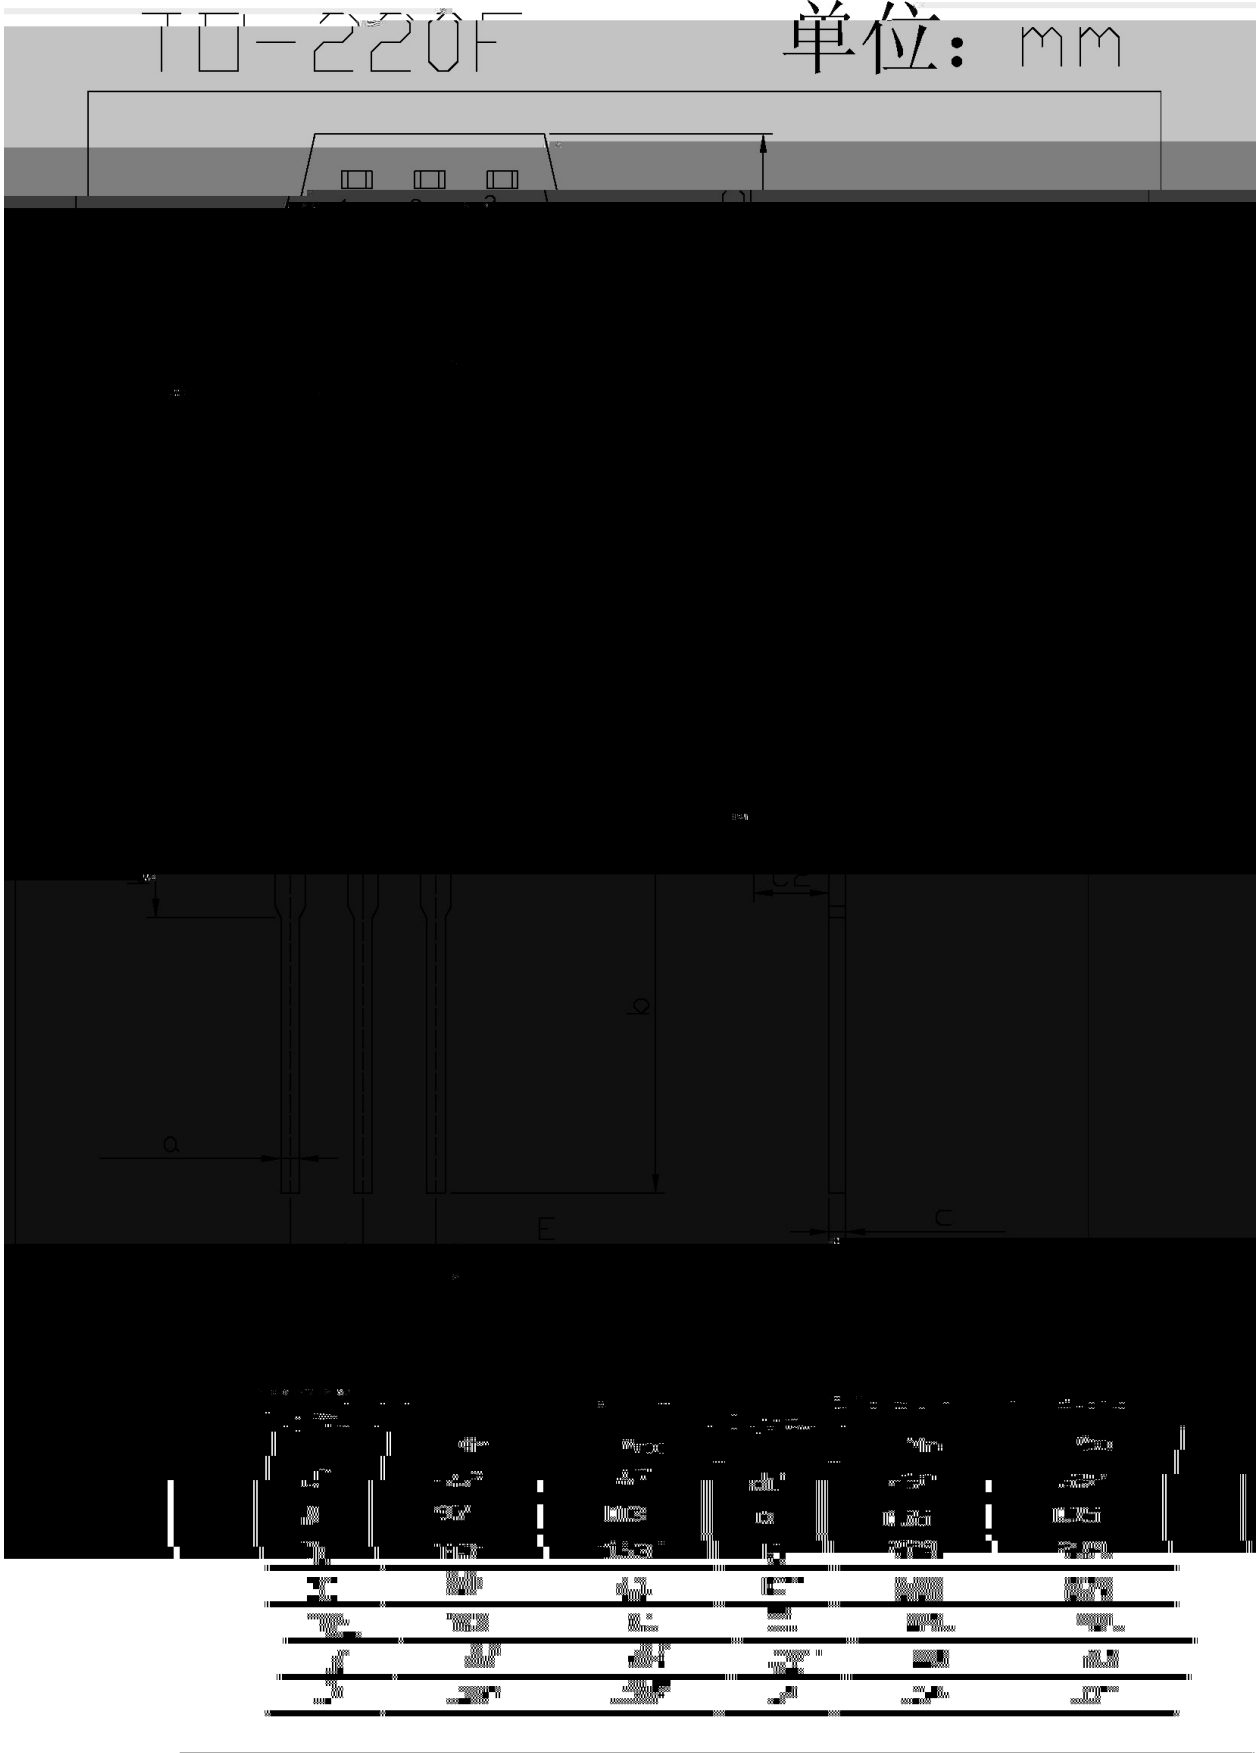

/ Marking Instructions

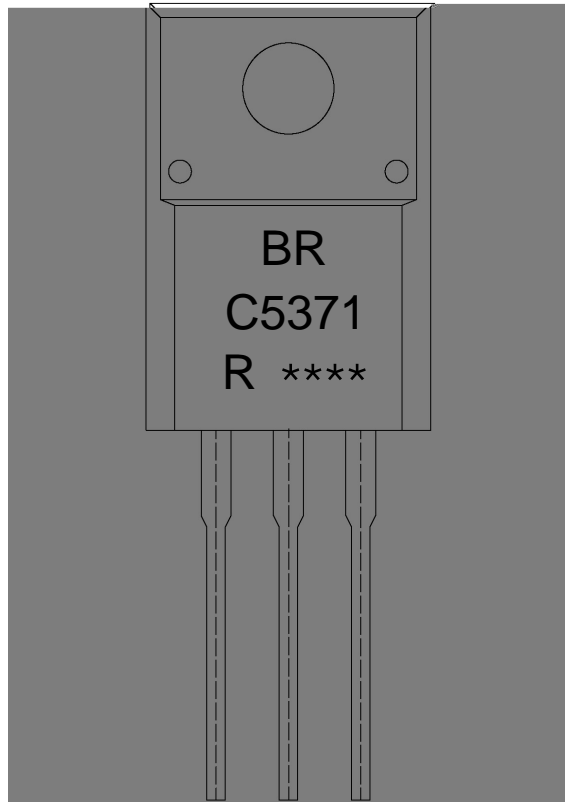

BR

C5371

R: h_{FE}

Note:

BR: Company Code.

C5371: Product Type.

R: h_{FE} Classifications Symbol.

****: Lot No. Code, code change with Lot No.

