

/ Descriptions

WR0459 QSQ Silicon NPN transistor in a TO-126 Plastic Package.


/ Features

5VE443<
Complementary pair with 2SB1109.

/ Applications

Low frequency high voltage amplifier.

/ Equivalent Circuit



/ Pinning



PIN1 Emitter PIN 2 Collector PIN 3 Base

/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	B	C	D
h_{FE} Range	60 120	100 200	160 320


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	160	V
Collector to Emitter Voltage	V_{CEO}	160	V
Emitter to Base Voltage	V_{EBO}	5	V
Collector Current - Continuous	I_C	100	mA
Collector Power Dissipation	P_C	1.25	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=10\mu A$ $I_E=0$	160			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=1mA$ $I_B=\infty$	160			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=10\mu A$ $I_C=0$	5			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=140V$ $I_E=0$			10	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=5V$ $I_C=10mA$	60		320	
	$h_{FE(2)}$	$V_{CE}=5V$ $I_C=1mA$	30			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=30mA$ $I_B=3mA$			2	V
Base to Emitter Voltage	V_{BE}	$V_{CE}=5V$ $I_C=10mA$			1.5	V
Transition Frequency	f_T	$V_{CE}=5V$ $I_C=10mA$		140		MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V$ $I_E=0$ $f=1MHz$		3.8		pF


/ Electrical Characteristic Curve

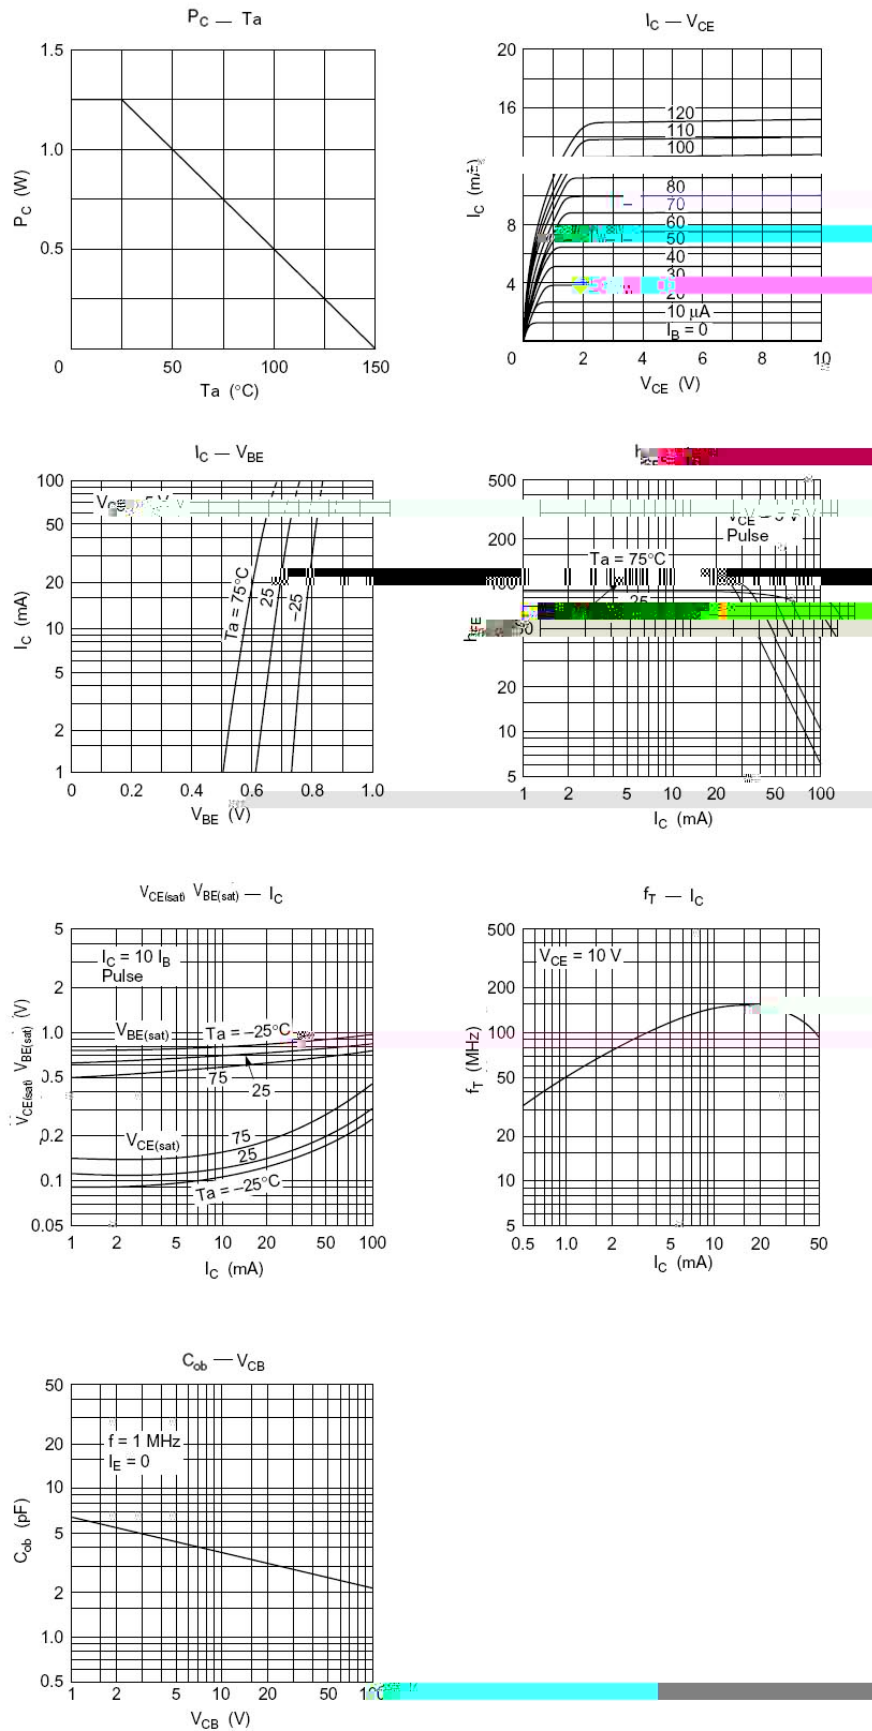


/ Package Dimensions

T□-126

单位: mm

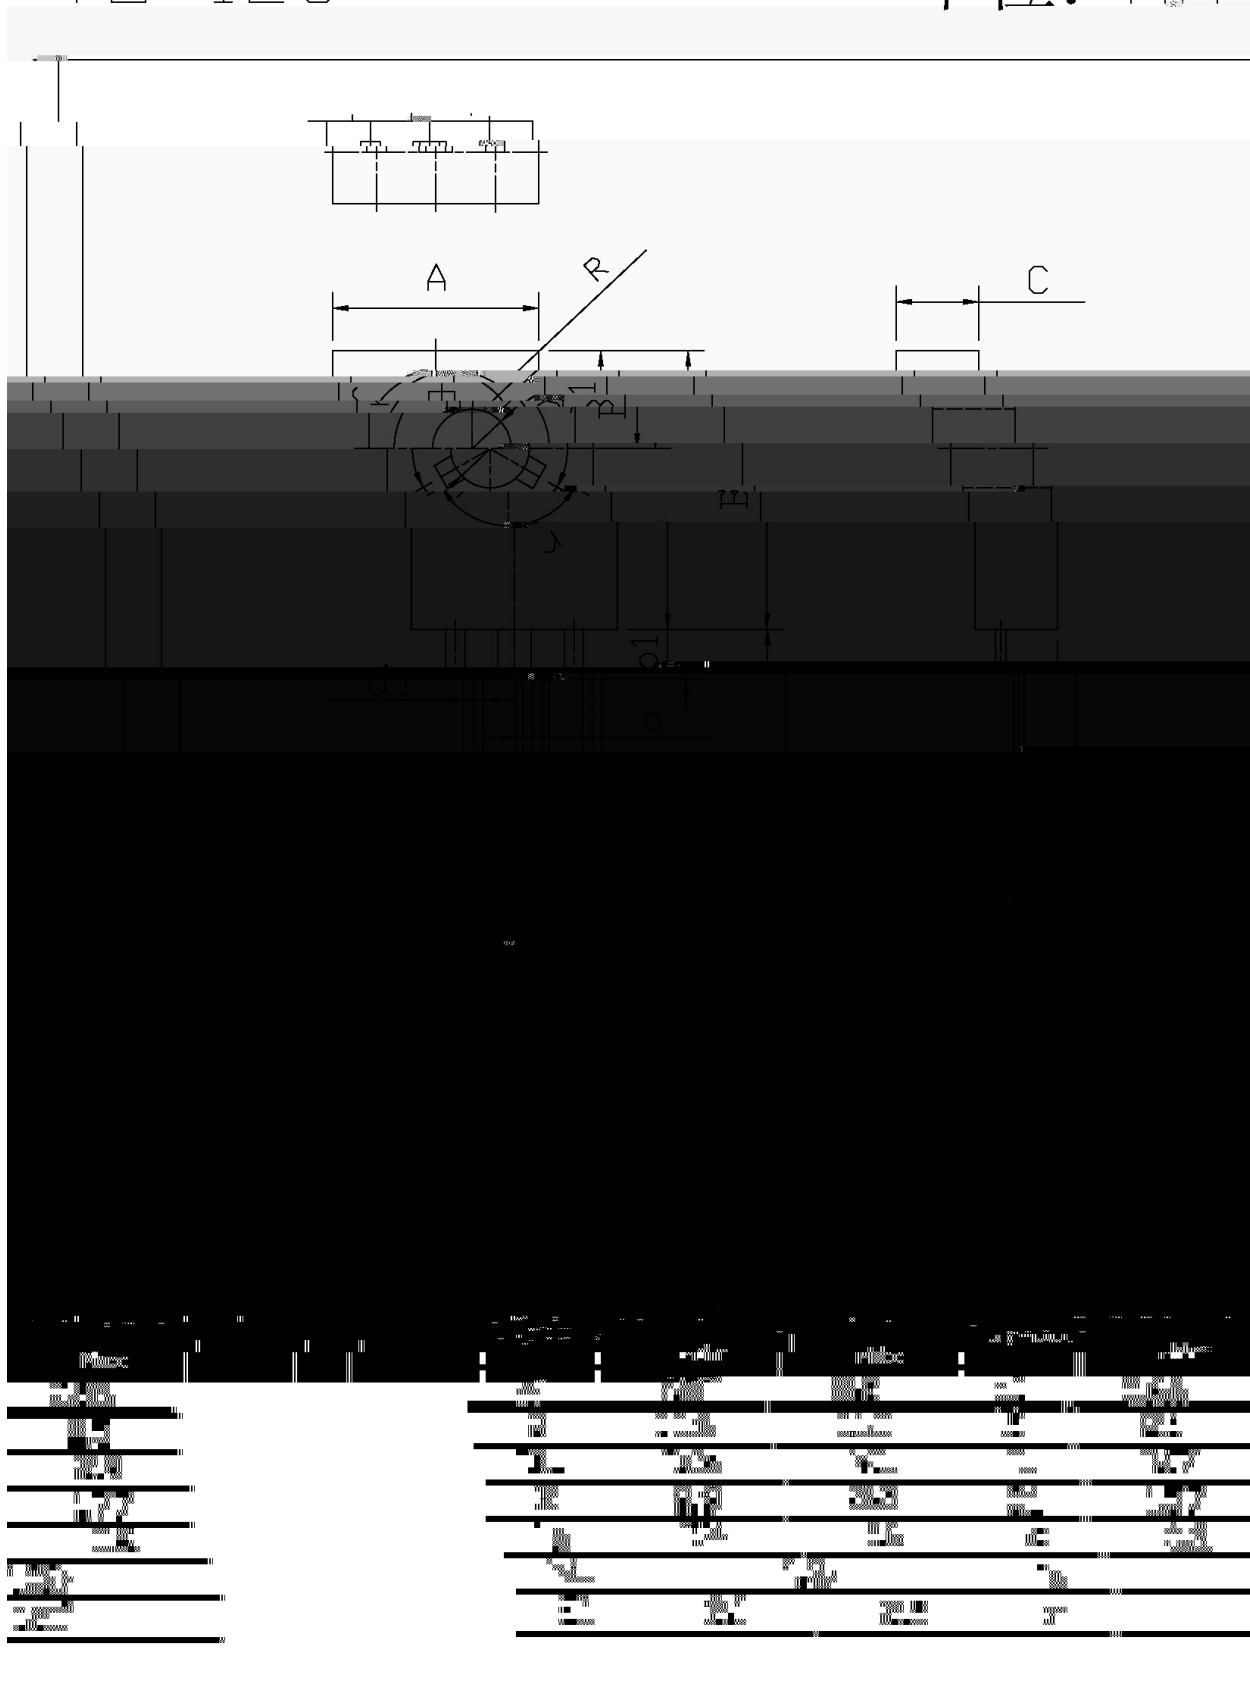

/ Marking Instructions

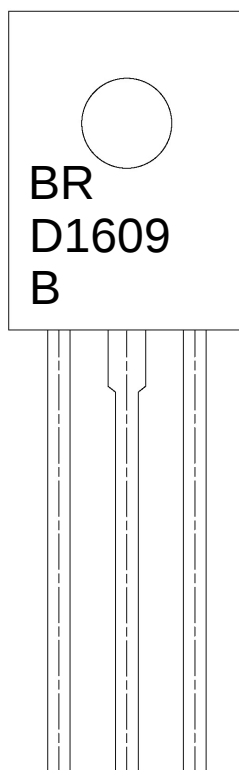

EU

G493<

E= k_{IH}

Note:


BR: Company Code

D1609: Product Type.

B: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

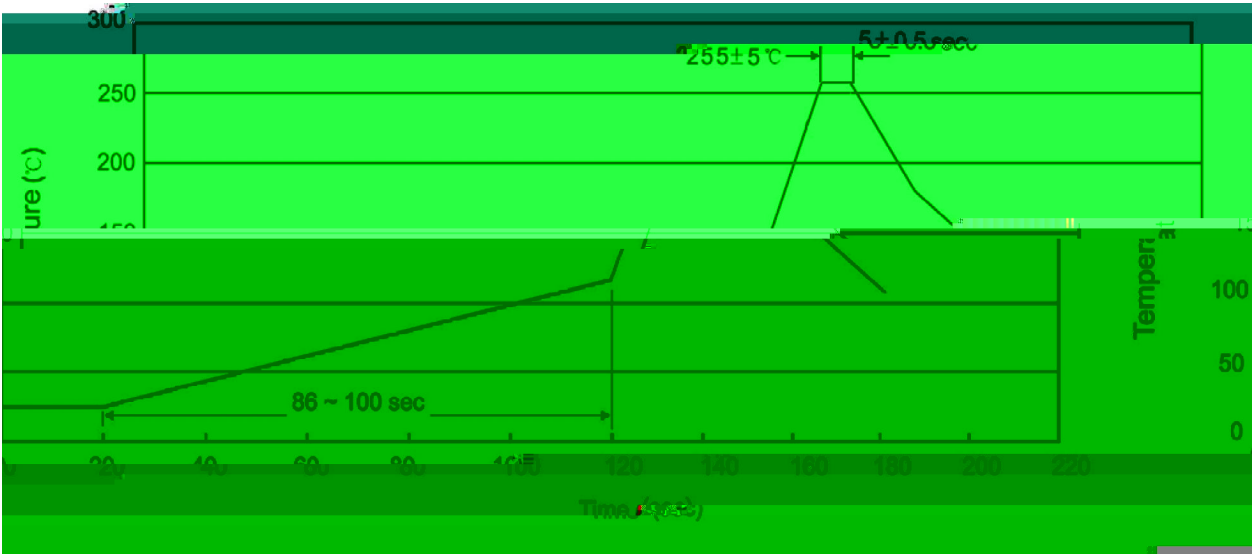

Note:

- | | | | | | |
|---|------------------------|-------------------|------------------------|--------|---|
| 1 | 25 | 150 $\frac{3}{8}$ | 60 | 90sec; | 1.Preheating:25~150 $\frac{3}{8}$, Time:60~90sec. |
| 2 | 255 $\pm 5\frac{3}{8}$ | | 5 ± 0.5 sec; | | 2.Peak Temp.:255 $\pm 5\frac{3}{8}$, Duration:5 ± 0.5 sec. |
| 3 | | 2 | 10 $\frac{3}{8}$ /sec. | | 3. Cooling Speed: 2~10 $\frac{3}{8}$ /sec. |

/ Resistance to Soldering Heat Test Conditions

270 $\pm 5\frac{3}{8}$	10 ± 1 sec.	Temp.:270 ± 5	Time:10 ± 1 sec
------------------------	-----------------	-------------------	---------------------

/ Packaging SPEC.

/ BULK

Package Type	Units
--------------	-------