
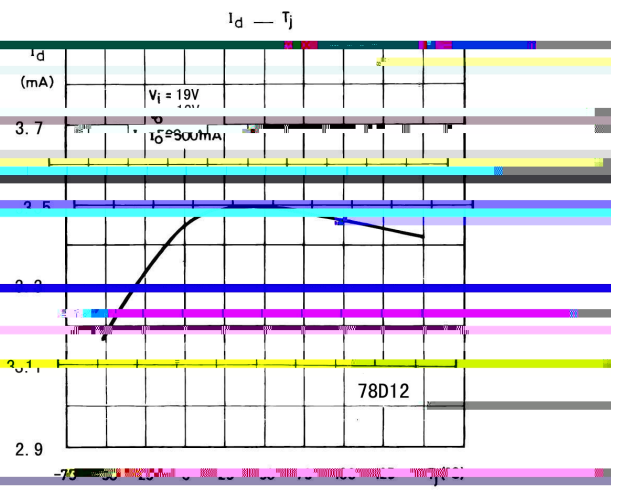
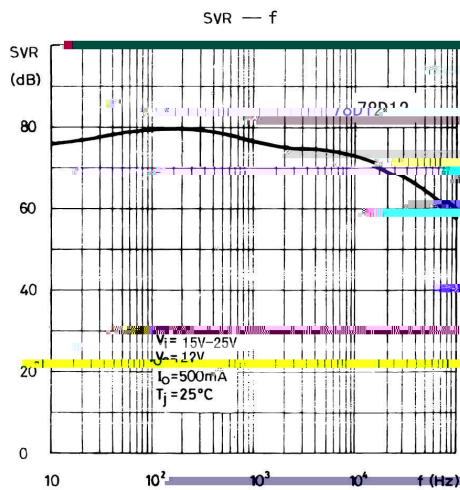
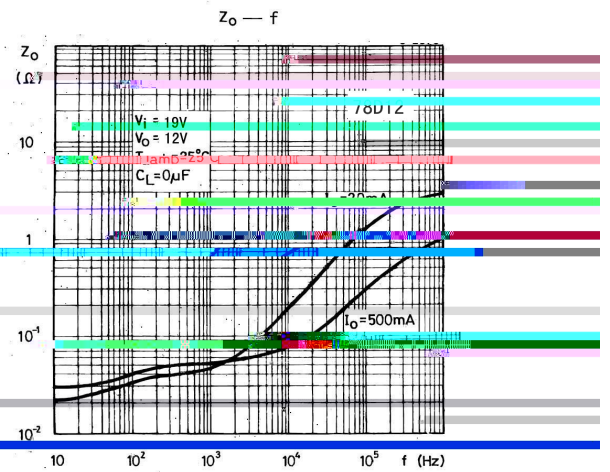
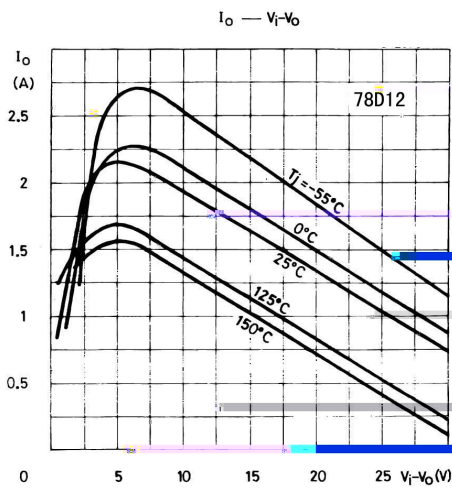
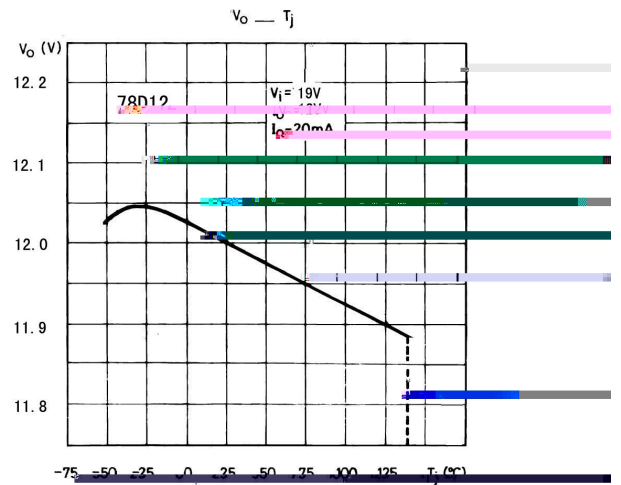



Rev.J Jun.-2024

TO-252

217 R166

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

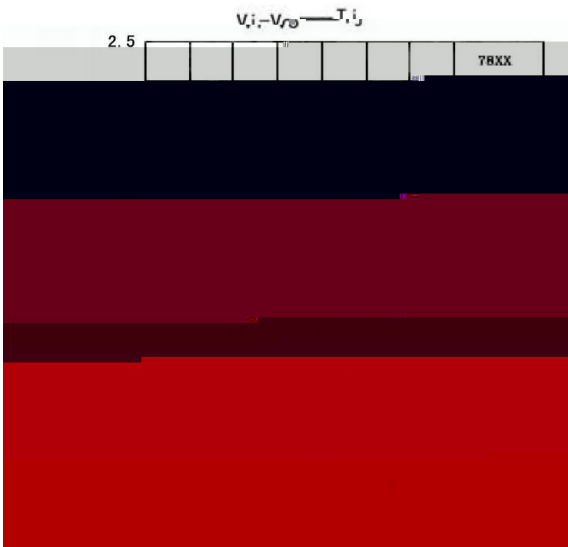

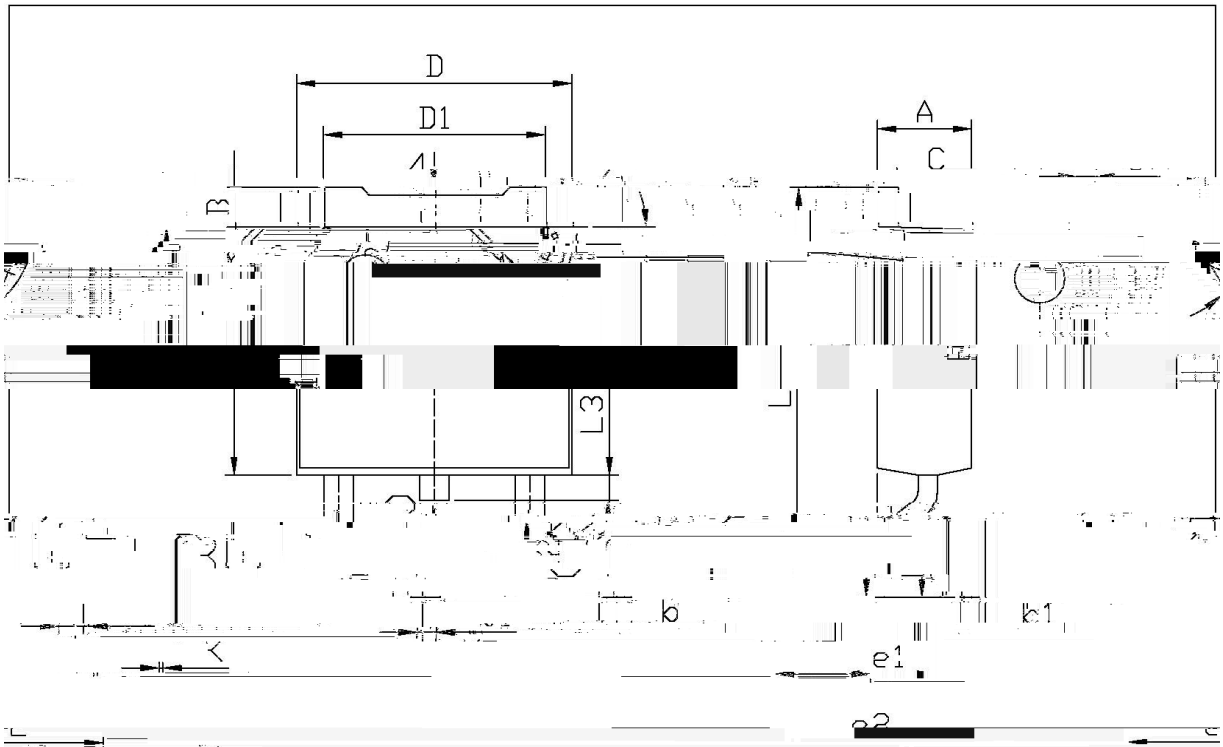

单位: mm

Dimensions		Millimeters		Dimensions		In Millimeters	
Min	Max	Symbol	Min	Max	Symbol	Min	Max
2.34		B	0.95	1.25	e1	2.21	
1.73			0.70	0.90	e2	4.19	
0.75			0.55	0.85	K	10.35	
0.15			0.55	0.75	L3	0.60	
0.30			6.45	6.75	D1	6.10	6.50

52

T0-2

K\ d g\ i Xk i \ ' Gif] \ d] fi \ @ ' I \] dn ' Jf d \ i ` e ^ Ž G Y \$ = i \ \ ž

Note:

- | | | | |
|---|---------|-----------|---|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ REEL