


BR2SA1576AQ
Rev.A Apr.-2023


SOT-323

PNP

Silicon PNP transistor in a SOT-323 Plastic Package.




/ Electrical Characteristic Curve

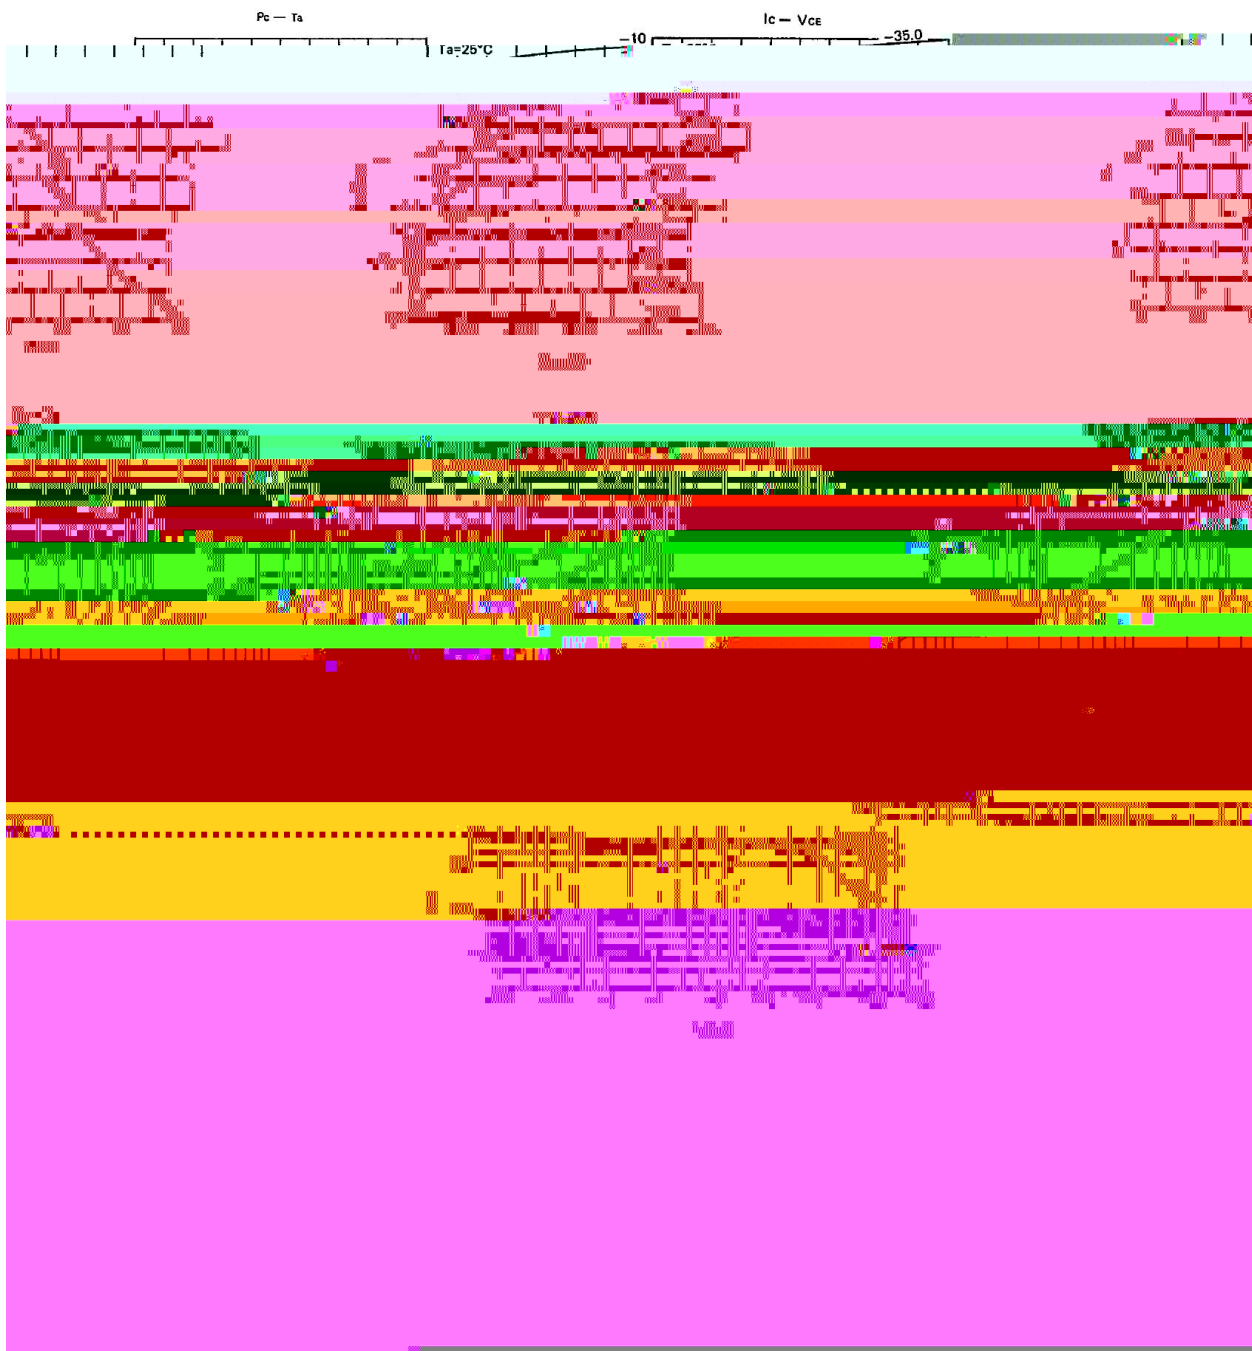

BR2SA1576AQ
Rev.A Apr.-2023



/ Marking Instructions

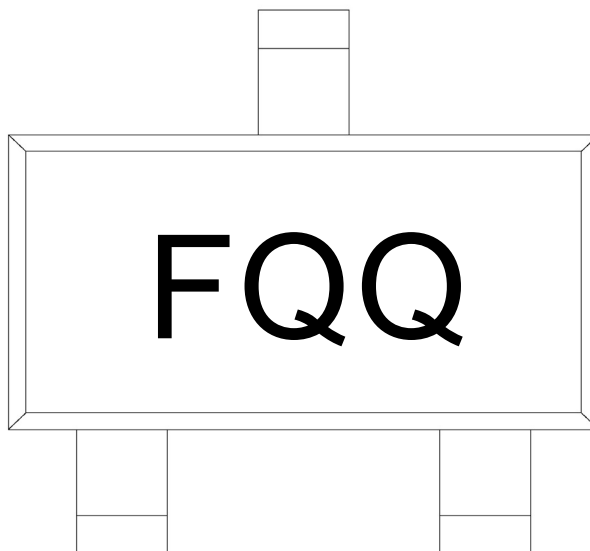

F

Q

Q

h_{FE}

Note:


F: Product Type

Q: Automobile halogen-free product Code

Q h_{FE} Classifications Symbol



() / Resistance to Soldering Heat Test Conditions

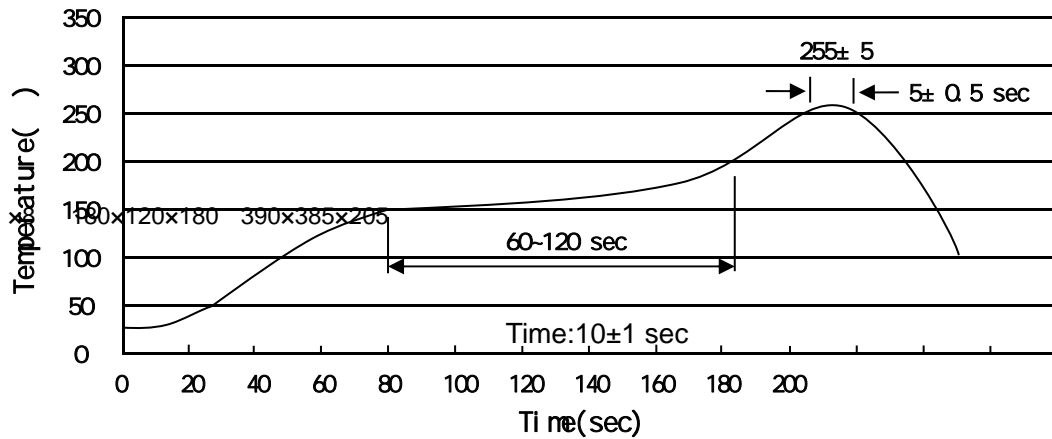

Note:

- 1 150 200 60 120sec; 1.Preheating:150~200

/ Resistance to Soldering Heat Test Conditions

260±5

10±1 sec.

Temp.:260±5

/ Packaging SPEC.

/ REEL

mm
Outer Box

Package Type	Units		Dimension			(unit ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	
SOT-323	3,000	10	30,000	6	180,000	7		

/ Notices