


/ Absolute Maximum Ratings(Ta=25)

V_{DS}	I_N	V_{GS}	D


/ Electrical Characteristics(Ta=25)


V_{DS}	I_N	f_{T}	ω_{n}	ε_z	ω_z	D
		μ				
						μ
						μ
						μ
		μ				
						Ω
		Ω				

/ Electrical Characteristic Curve

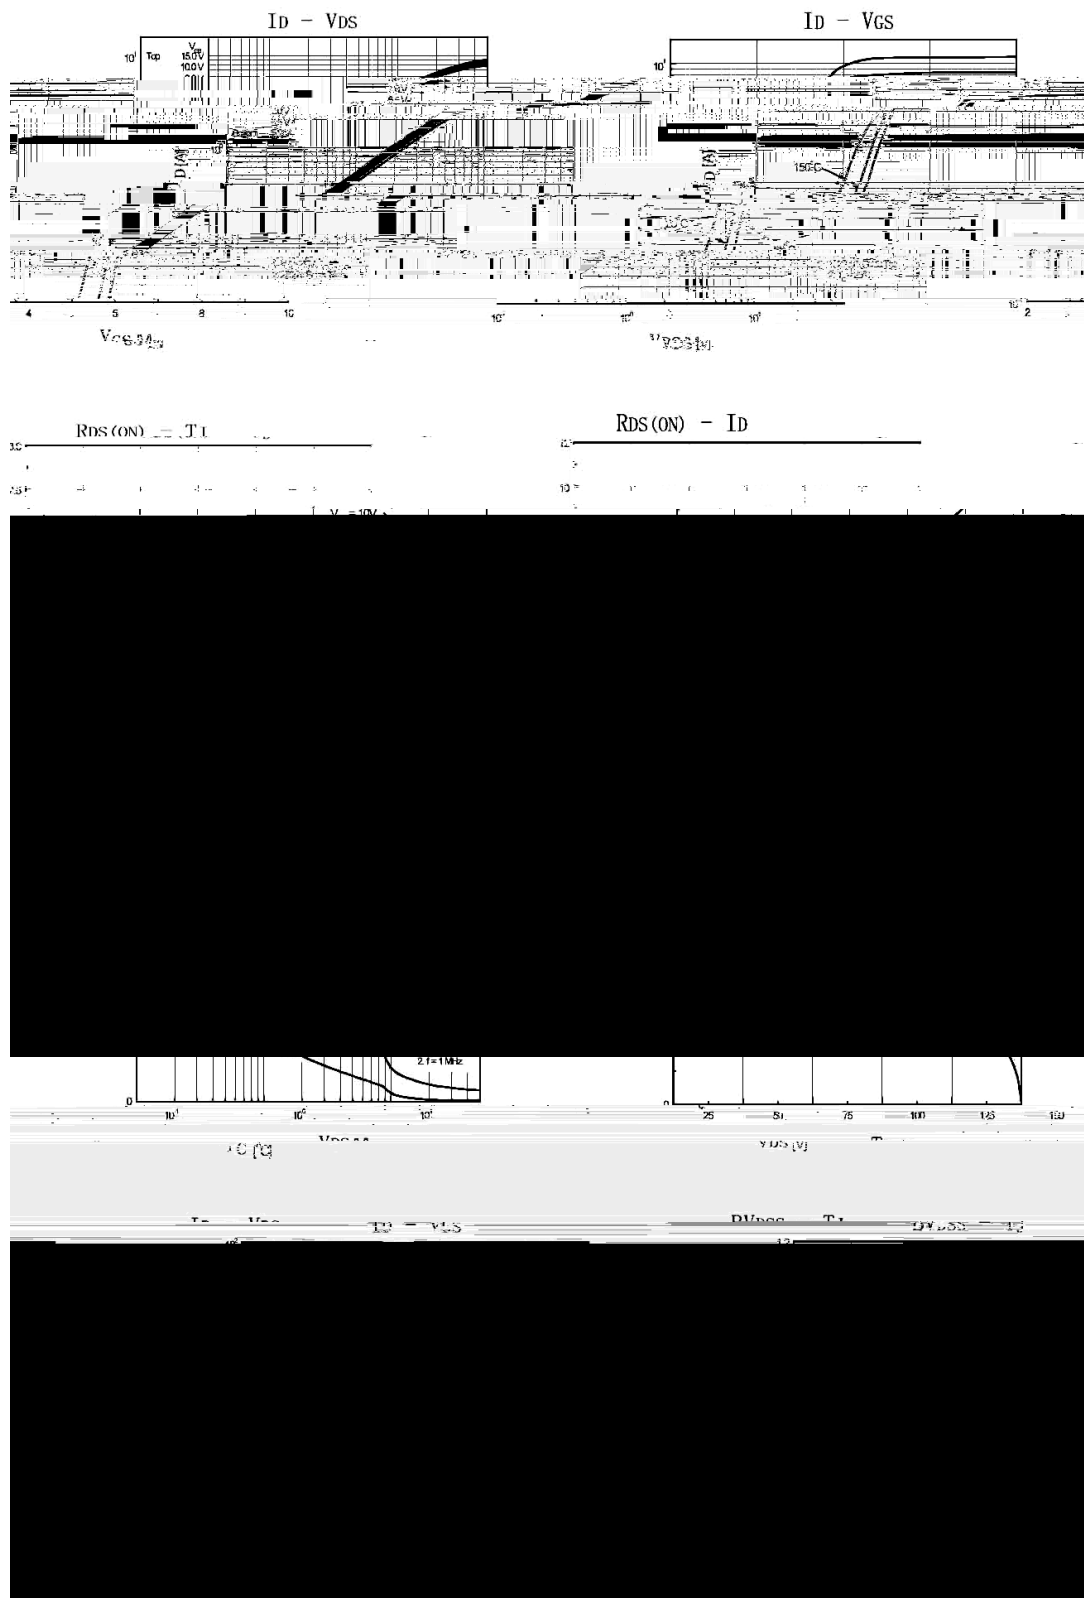


/ Package Dimensions

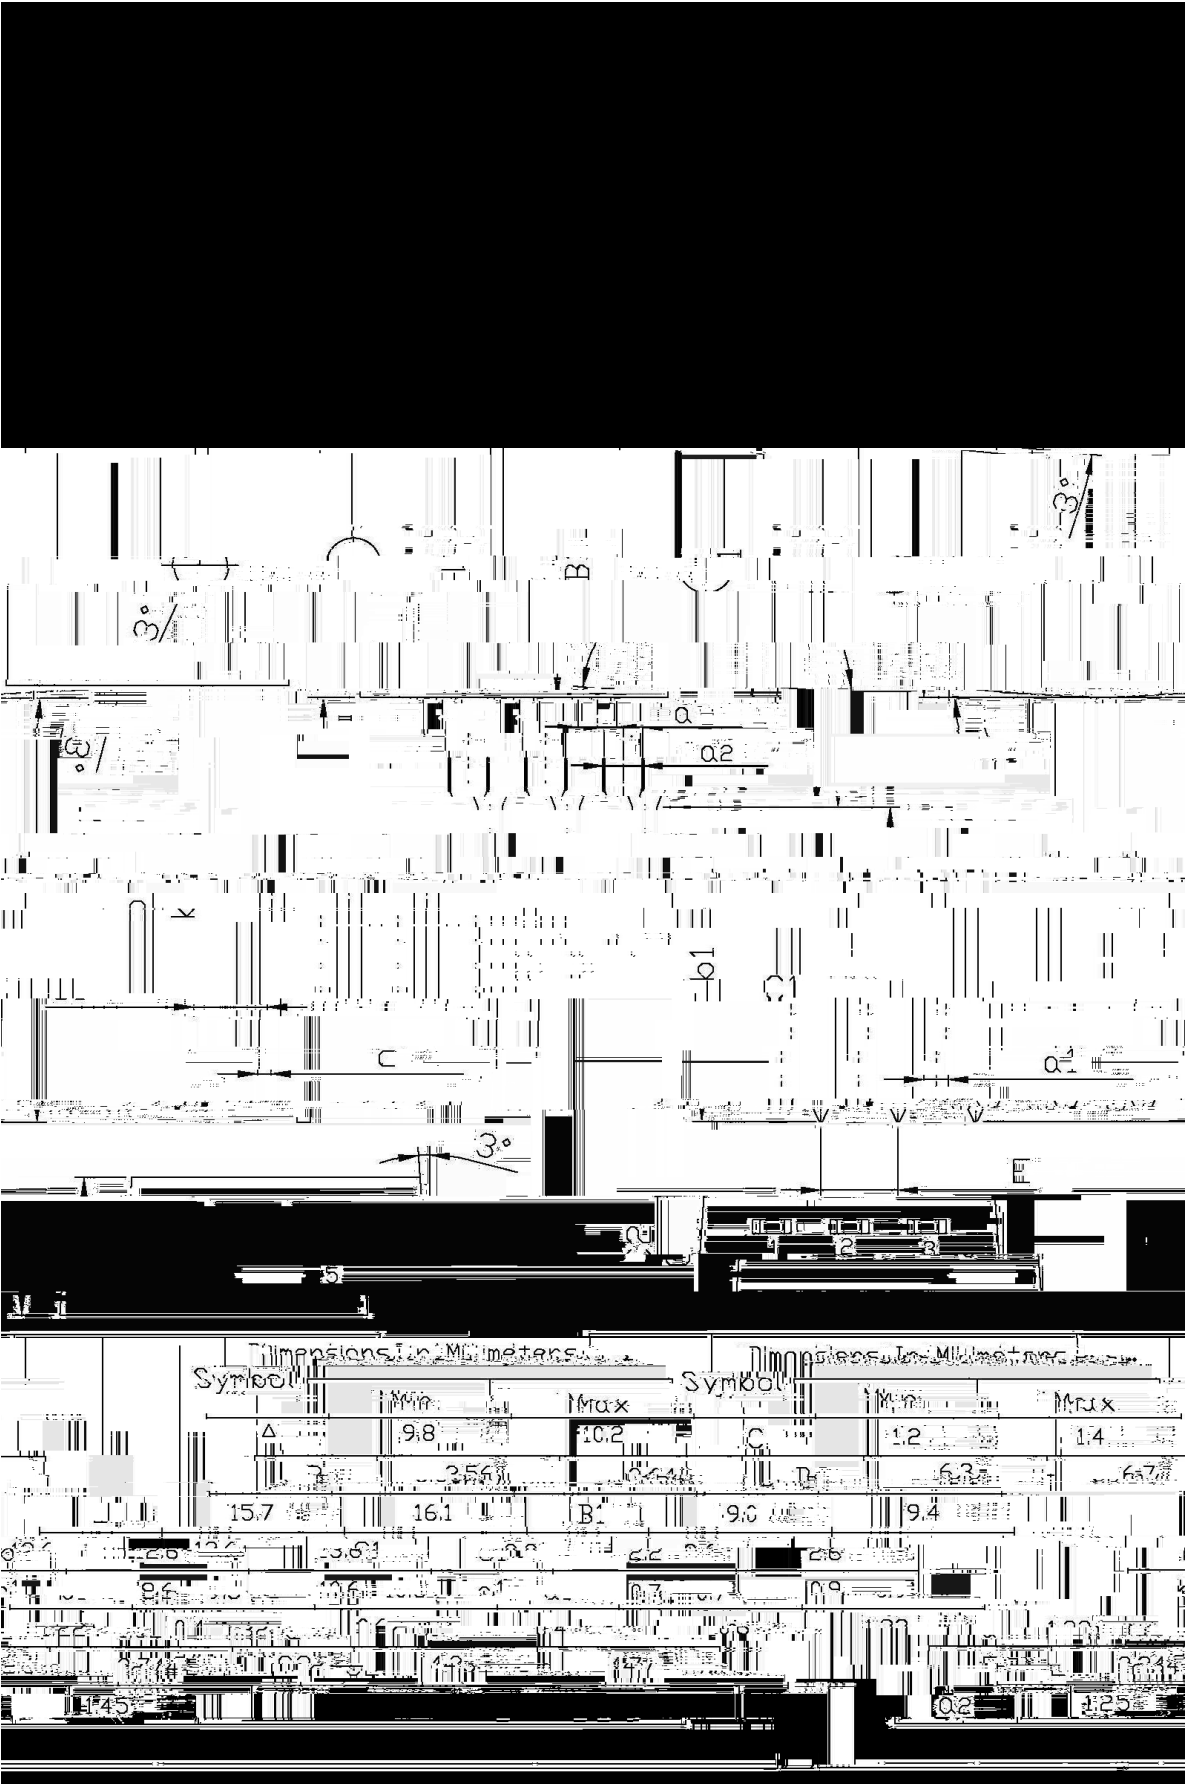

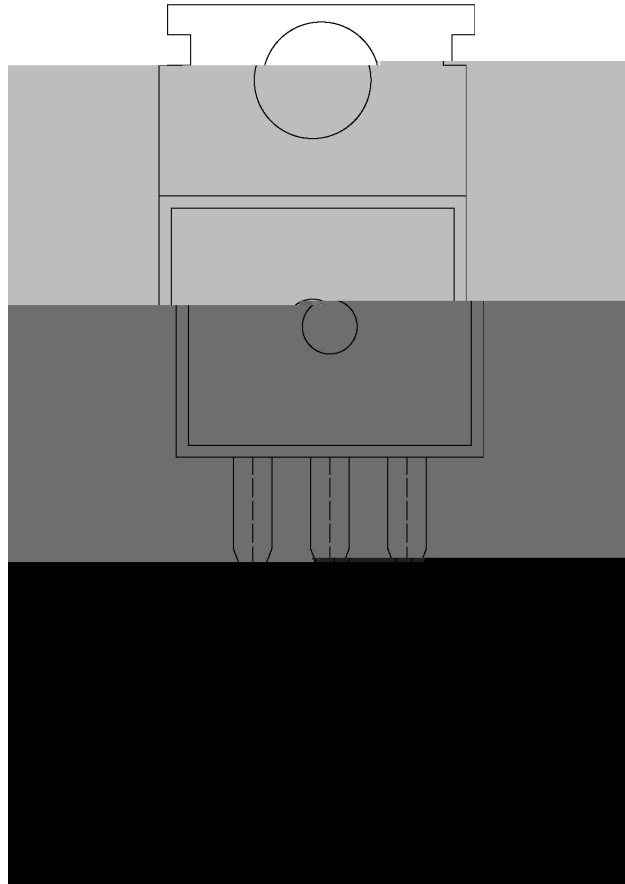

() / Temperature Profile for Dip Soldering(Pb-Free)

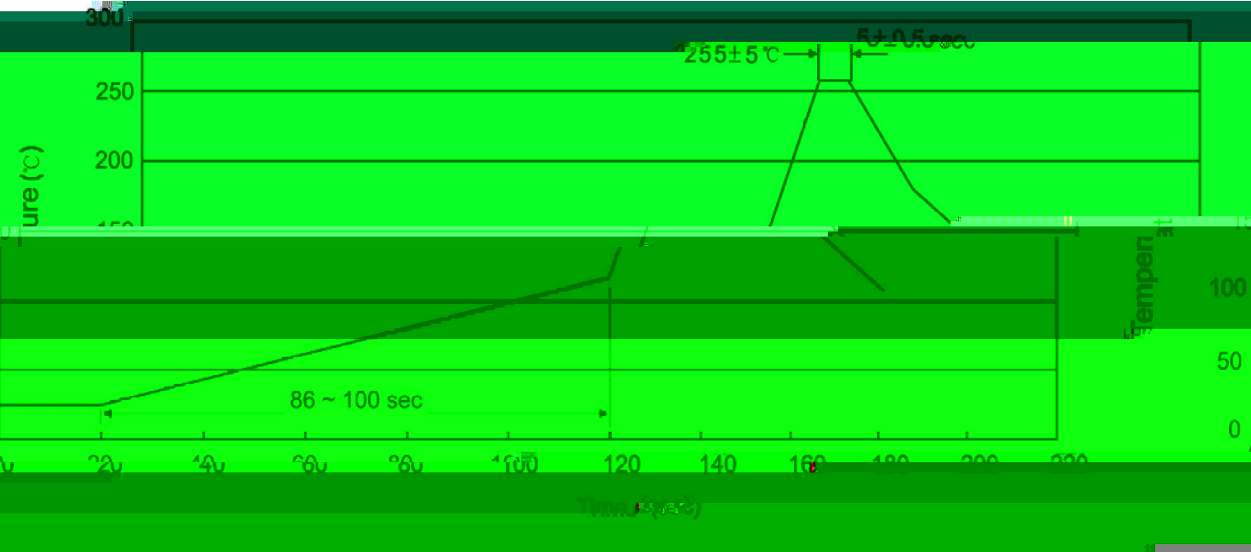

” X