



H	2018-4				
A	2022-5-24	all	BR Q AEC-Q101 , H Q 245 ±5°C 5±0.5sec 255±5°C 5±0.5sec		



SOD-323

Silicon Diode in a SOD-323 Plastic Package.

AEC-Q101

Small signal diode, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

Switching diodes, Meet the stringent requirements of automotive applications.



PIN1:Cathode

PIN2:Anode





Rev.A May.-2022

Parameter	Symbol	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}	85	V
Continuous forward current	$I_{F(AV)}$ ($T_s=90^{\circ}C$)	250	mA
Non-repetitive peak forward current	$I_{FSM(1)(t=1S)}$	0.5	A
	$I_{FSM(2)(t=1mS)}$	1.0	A
Total power dissipation	P_{tot} ($T_s=90^{\circ}C$)	400	mW
Thermal resistance from junction to soldering point	$R_{\theta J-S}$	150	K/W
Junction Temperature	T_j	150	$^{\circ}C$
Storage Temperature Range	T_{stg}	-65~150	$^{\circ}C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=1mA$			715	mV
		$I_F=10mA$			855	mV
		$I_F=50mA$			1.0	V
		$I_F=150mA$			1.25	V





Rev.A May.-2022

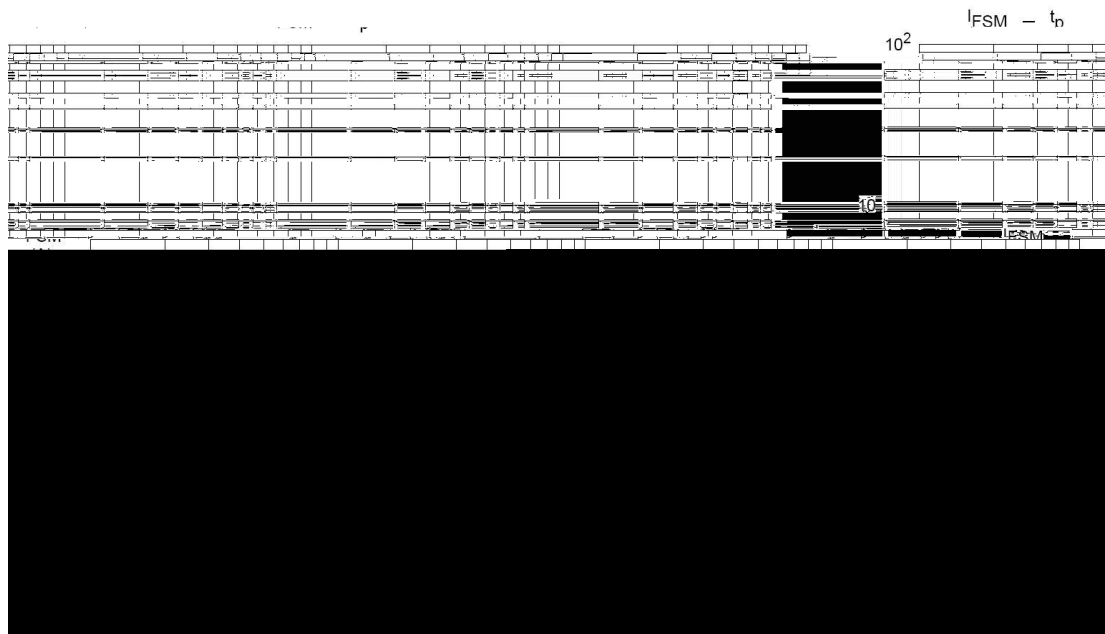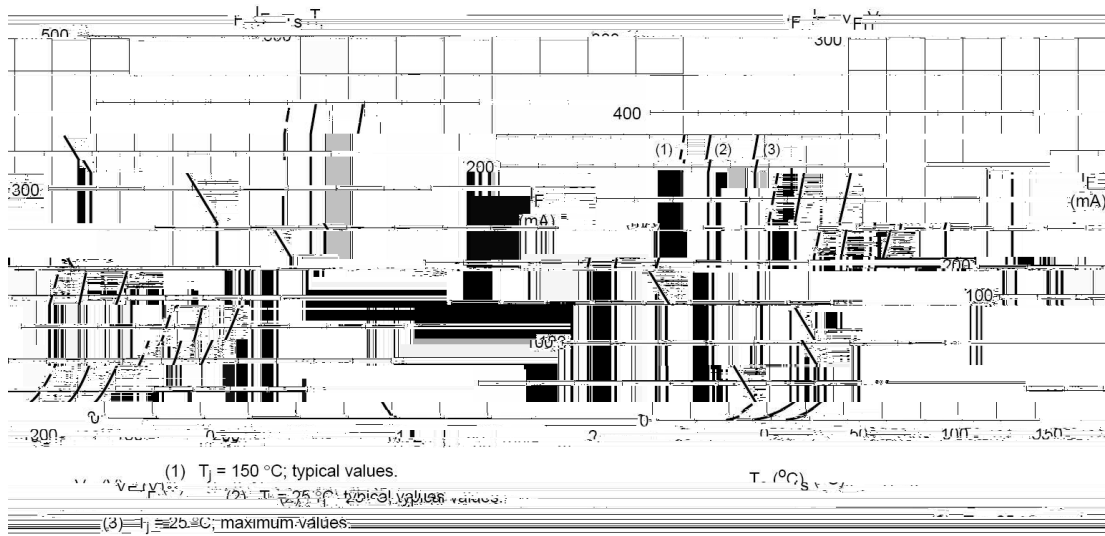




Rev.A May.-2022

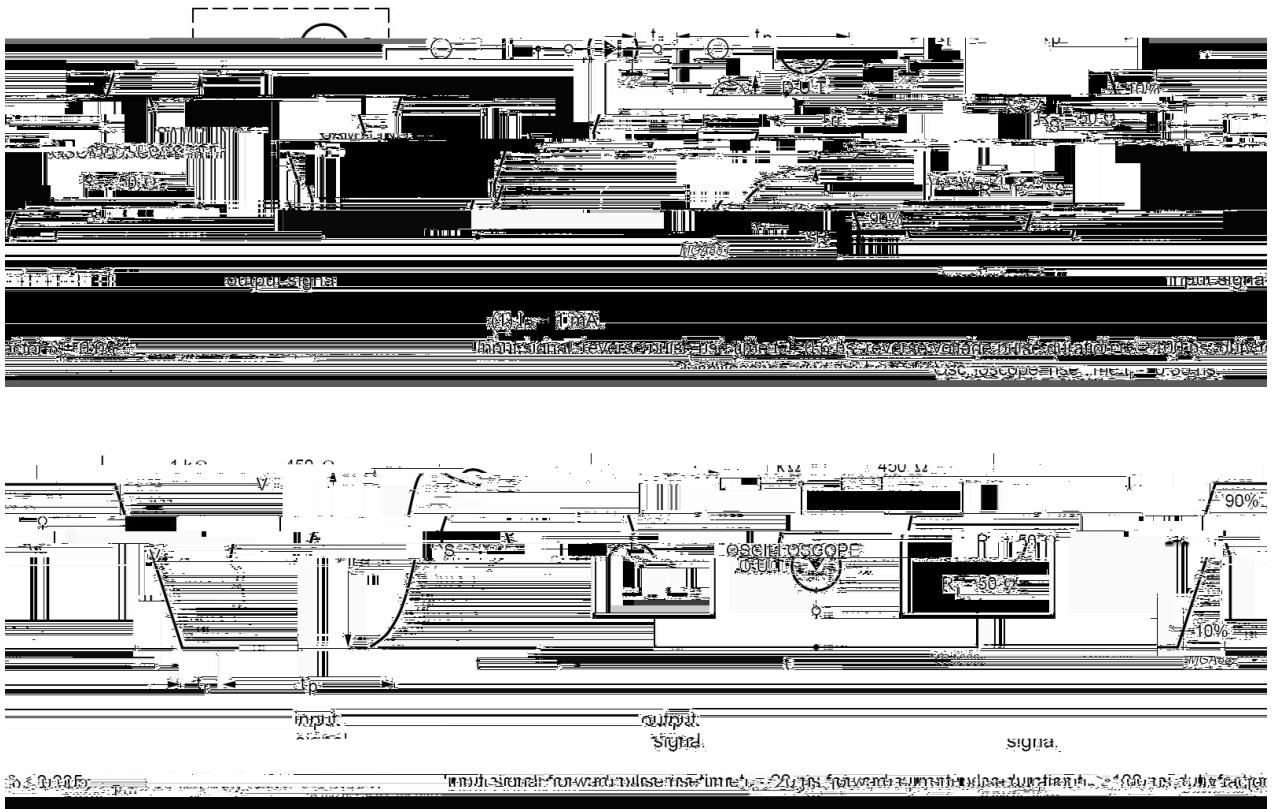

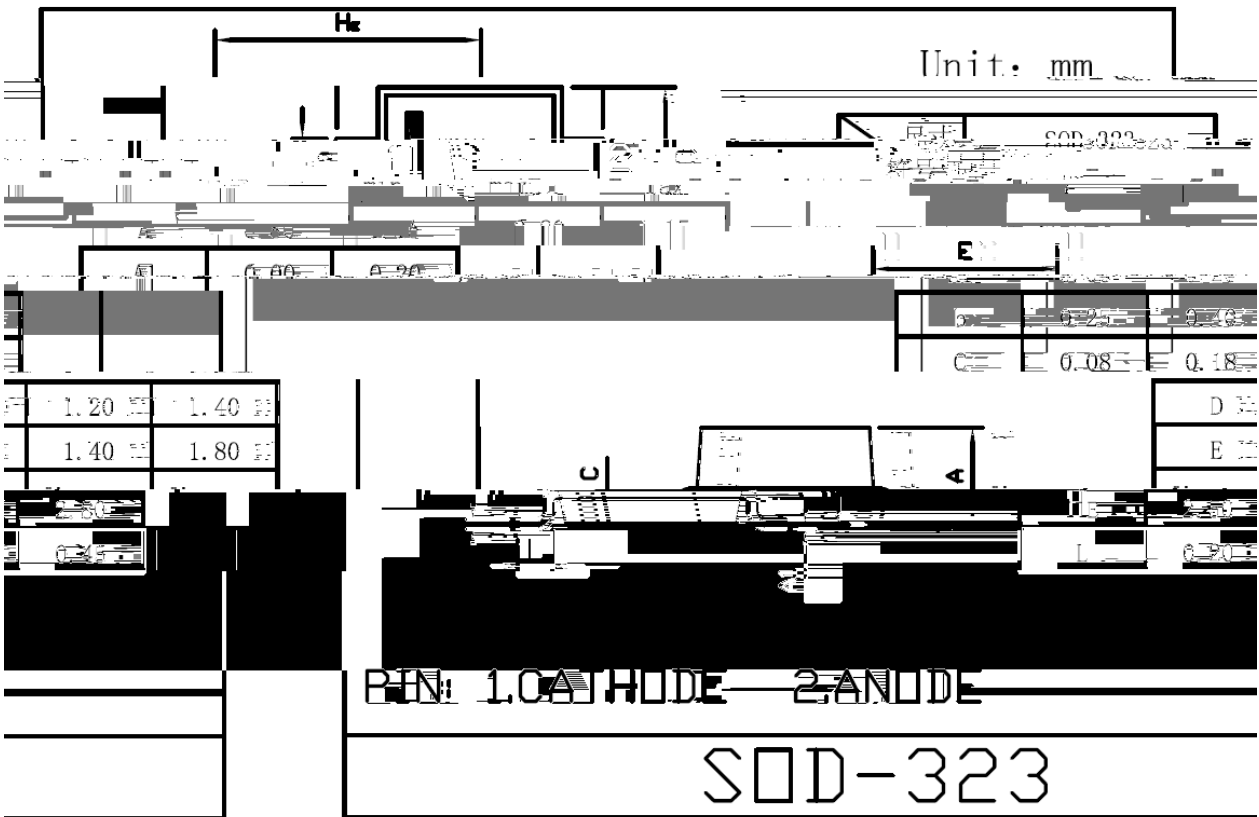

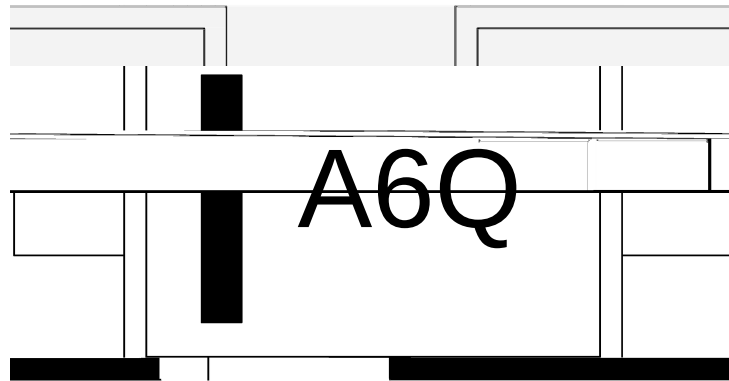


A6

Q

Note:

A6: Product Type Code

Q: Automobile halogen-free product Code

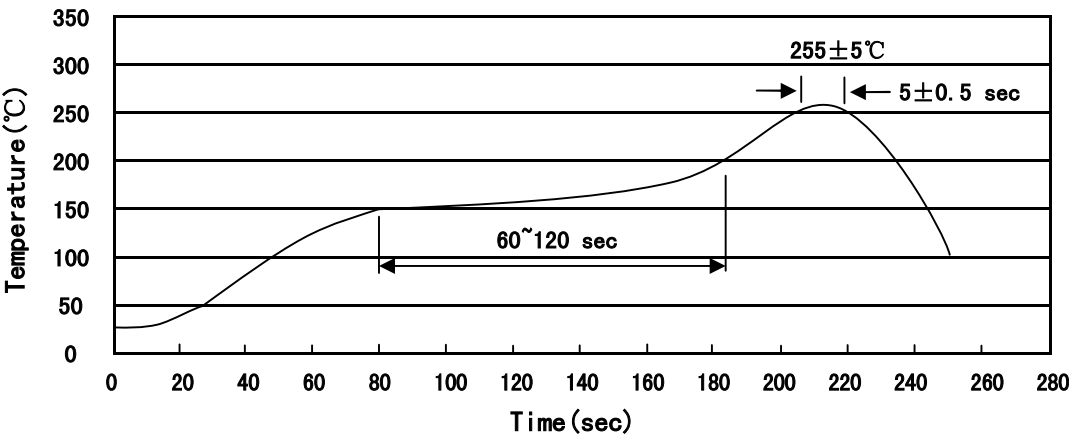

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200 , Time:60~120sec.
- 2

255 5

5 0.5sec;

2.Peak Temp.:255 5 , Duration:5 0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260 5

10 1 sec.

Temp.:260 5

Time:10 1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOD-323	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205