

“Y / Descriptions

VOW0;< H, 1 4


• Ė / Features

H, ɔ ll
ɔ ll
H,
4 ±
ɔ ɔ 5/8
H, ε ζ
“OBJ” 1
J ɔ ll ~
♫
ñ


v / Applications

ī ɔ - ɔ “OBJ” 4 ɔ ɔ
“OBJ” 4 ɔ ɔ
ɔ ʘ “OBJ” 4 ɔ ɔ
4 ɔ “OBJ” 4 ɔ ɔ
”A ī “OBJ” 4 ɔ ɔ

л ^ ǻ = / Equivalent Circuit

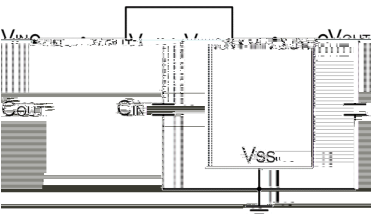

ã 1 ũ / Pinning





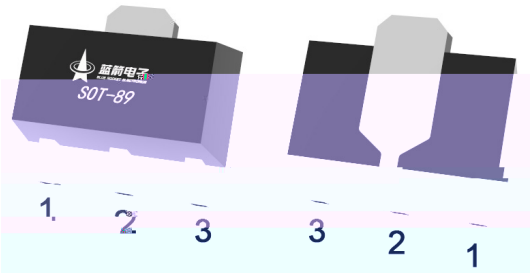


£. H Ć / Marking

4 ”


Ω	γ	⌋ γ	ω	ε	ω	μ
---	---	-----	---	---	---	---

Electrical Characteristic Curve

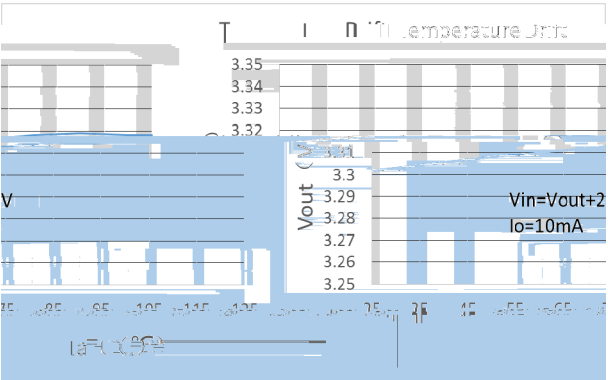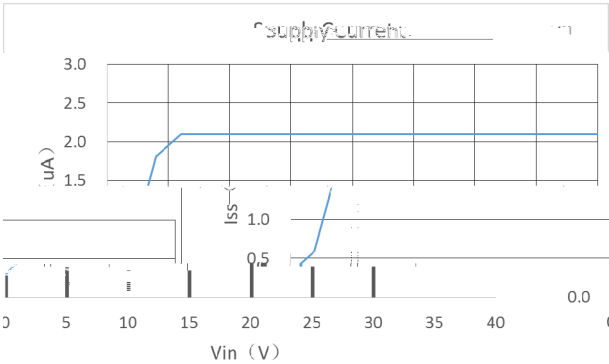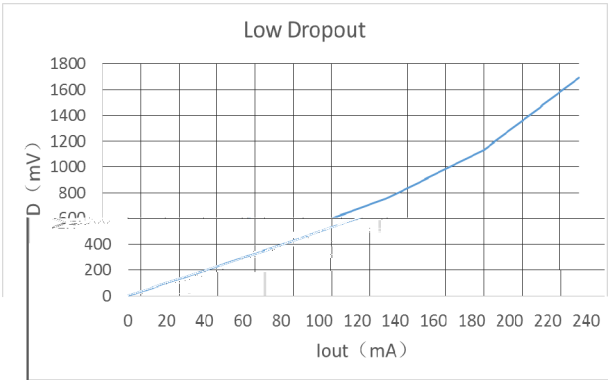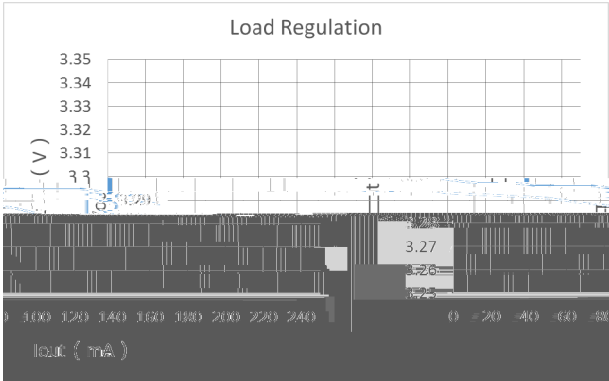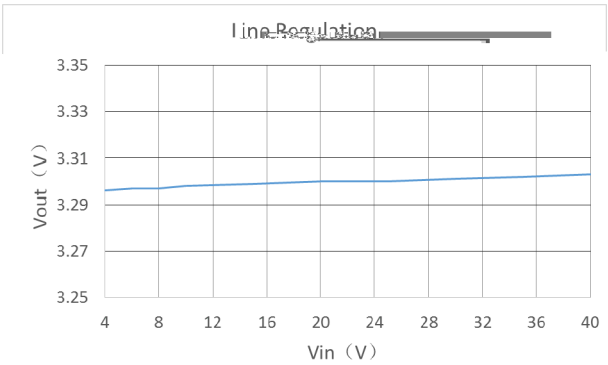


Typical Application Circuit

1

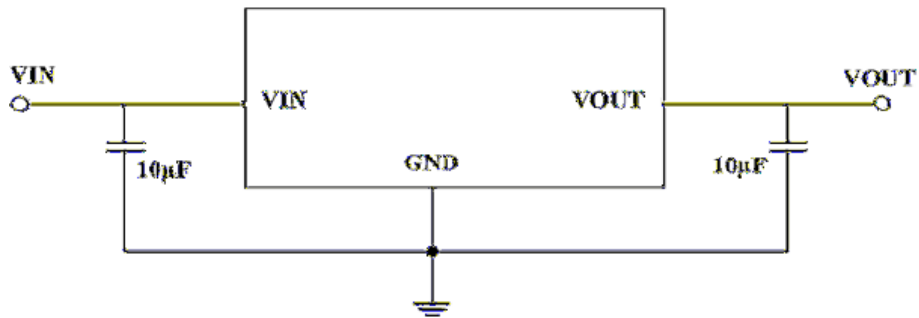


2

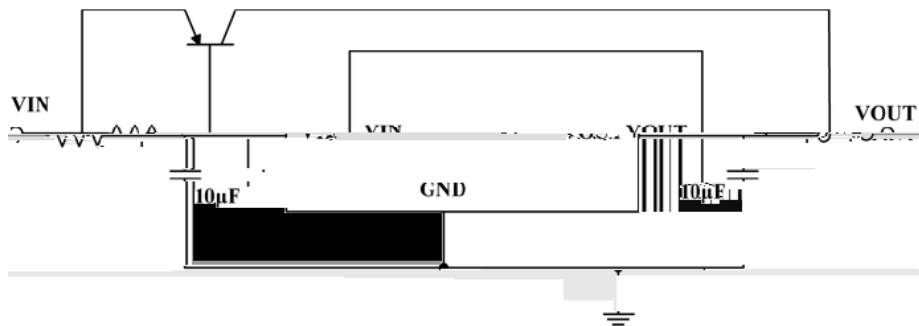


3

1

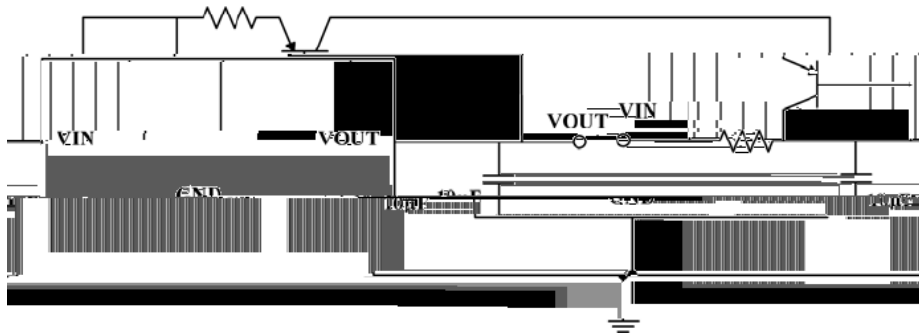


Typical Application Circuit


3 3

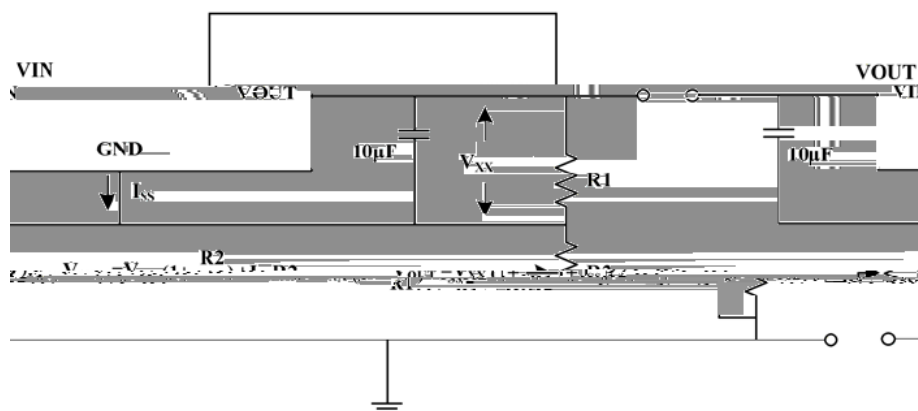


3 11 3

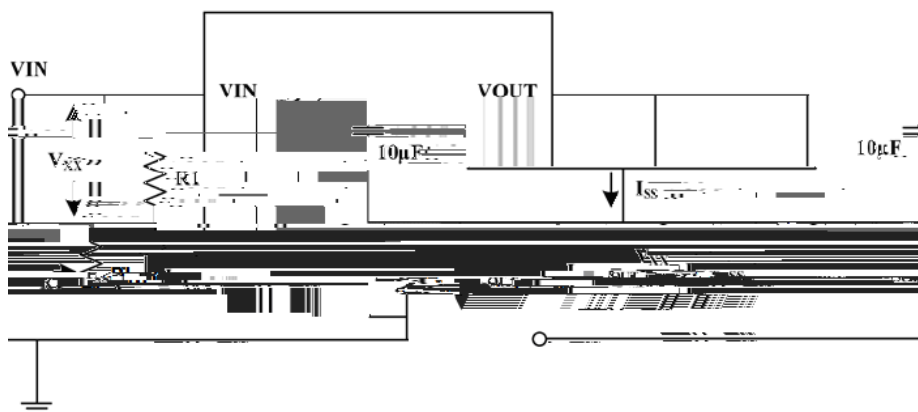

3

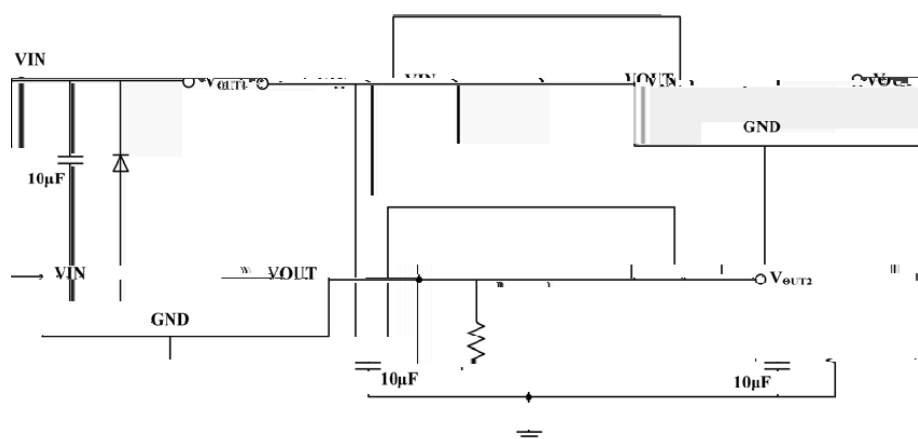

⌘ É Ò Ì f / Package Dimensions

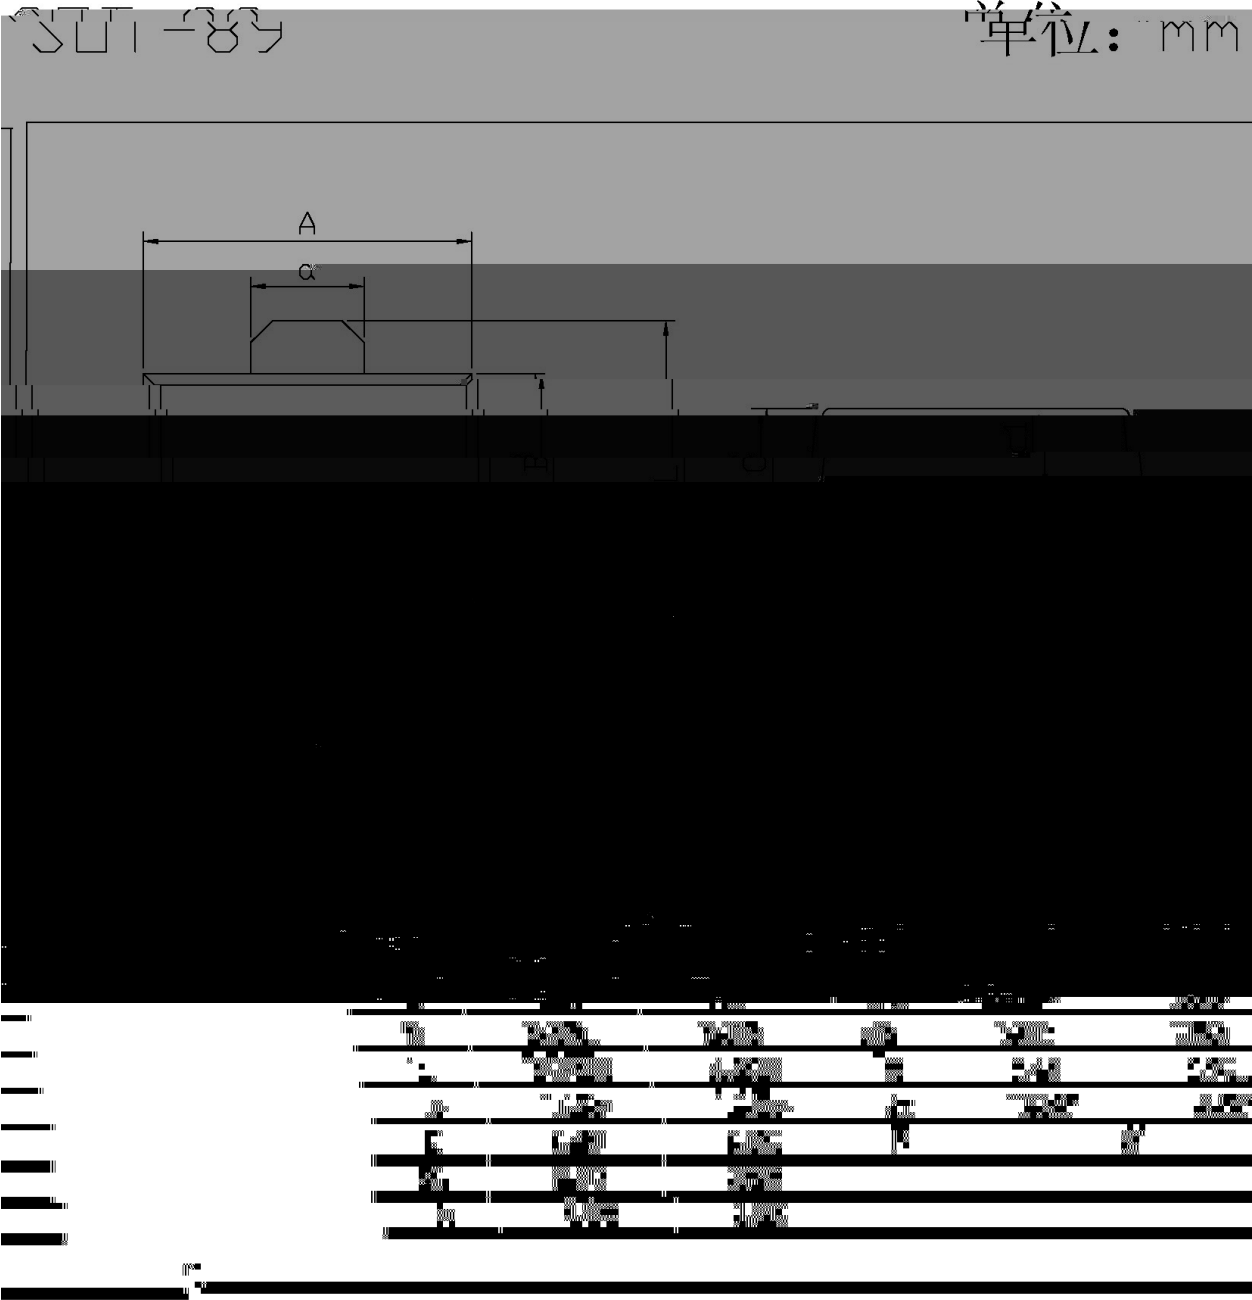

BRCO7533HT



DATA SHEET

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

”

□`H
□ ±`H / ± ±
i y

Resistance to Soldering Heat Test Conditions

□ ±`H ±

Packaging SPEC.

、