


BRCS005N04SHSL



BRCS005N04SHSL

/ Electrical Characteristic Curve

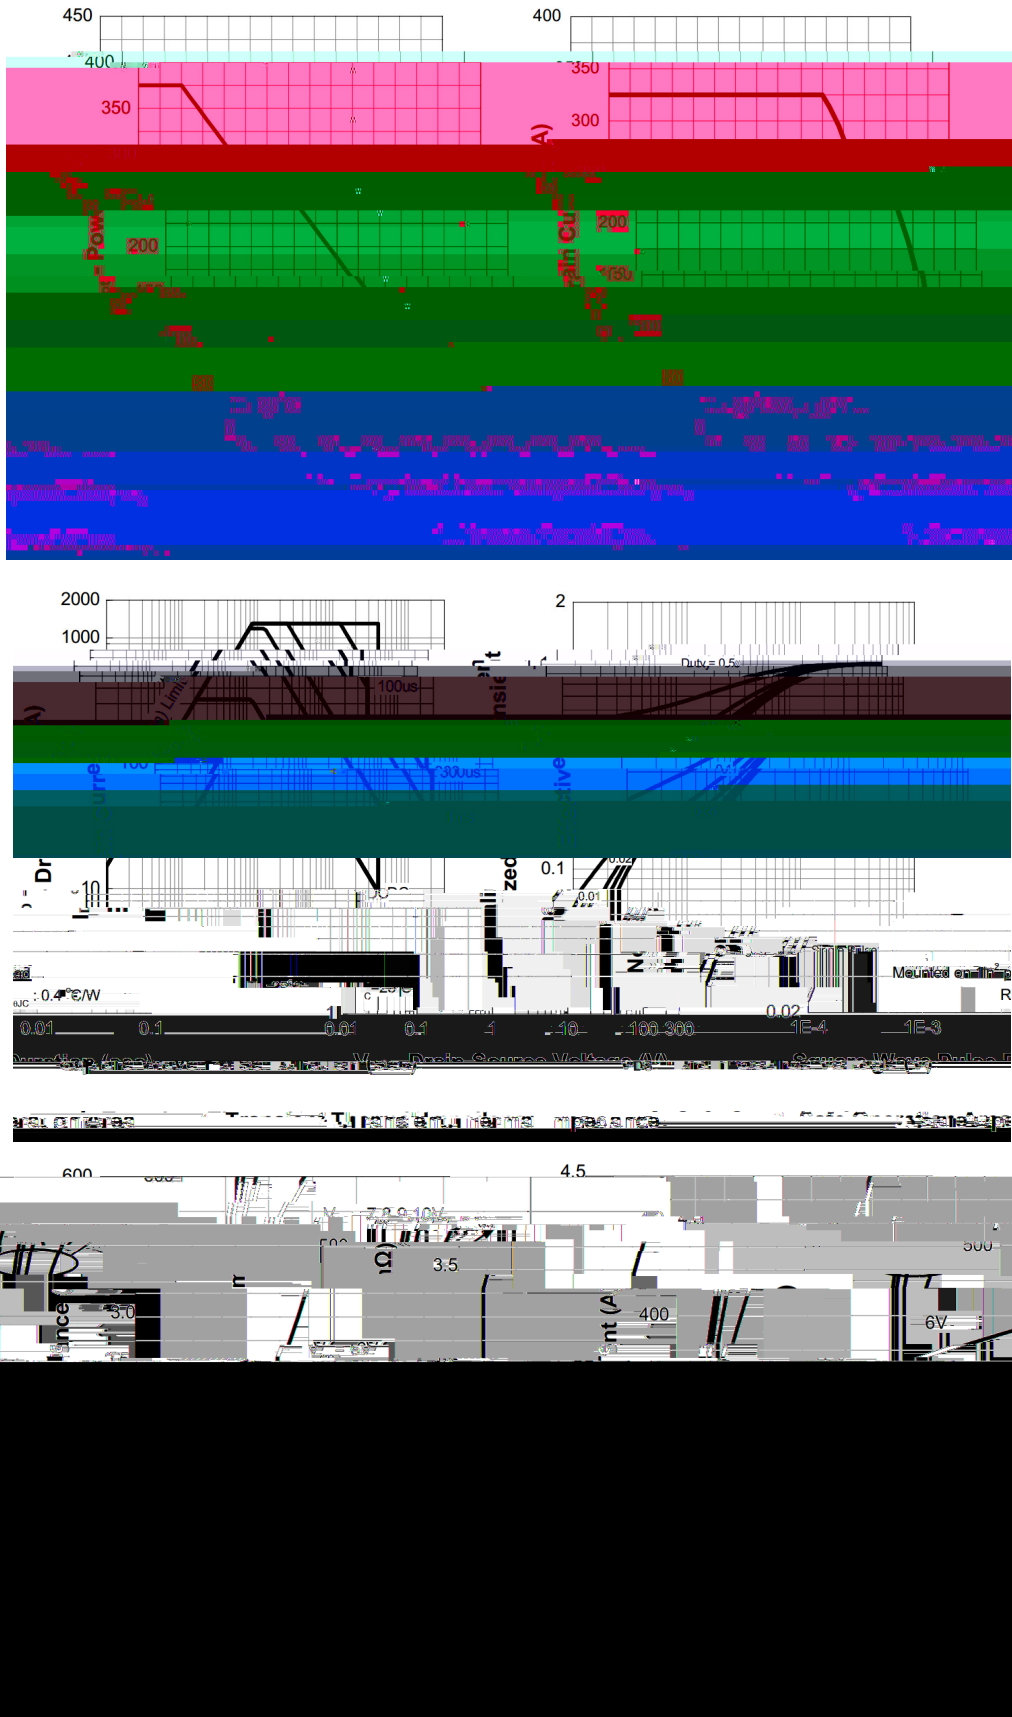


BRCS005N04SHSL

/ Package Dimensions

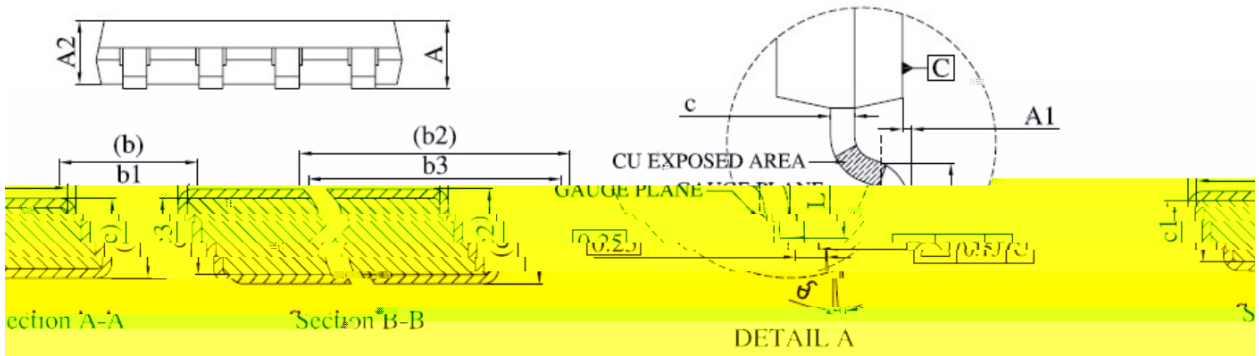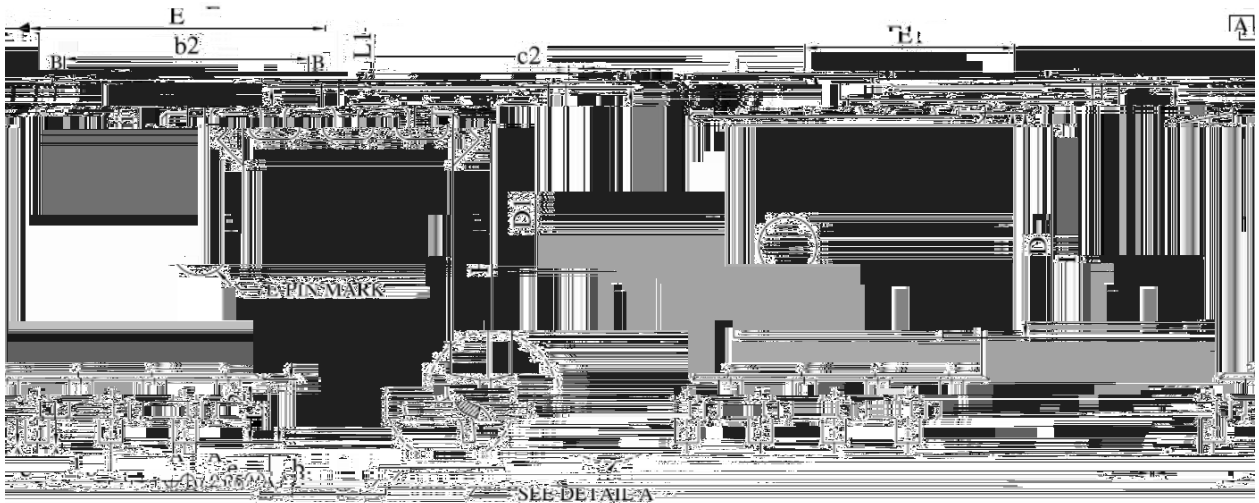

Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeters	
	MIN.	MAX.		MIN.	MAX.
A1	0.00	0.15	E1	4.95	5.30
A2	0.98	1.12	F1	3.50	3.70
b	0.35	0.50	e	1.27 BSC.	
b1	0.33	0.40	H	5.95	6.25
b2	4.00	4.41	i	-	0.25
b3	4.00	4.41			
c	0.25	0.30			
c2	0.25	0.30			
H	5.95	6.25			
i	-	0.25			

/ Marking Instructions

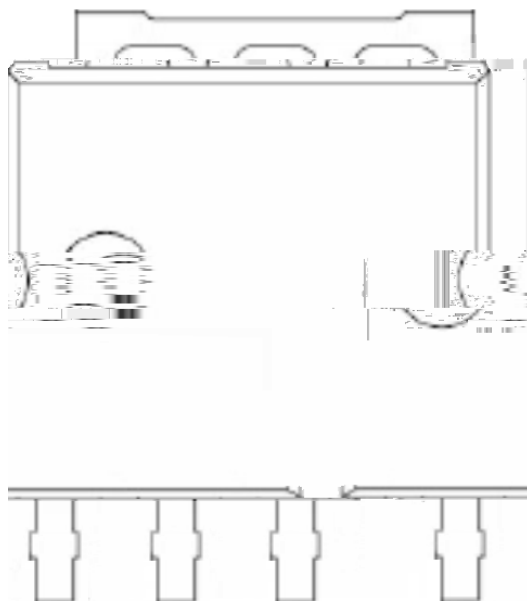

BR

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box