

# BRCS020N06SZC

Rev.B Dec.-2024

## / Descriptions

PDFN5<sup>2</sup> 6 N

N-Channel MOSFET in a PDFN5x6 Plastic Package.

## / Features

$V_{DS}(V)=60\text{ V}$   $I_D=158\text{ A}$

$R_{DS(ON)}@10\text{ V } 2.0\text{ m}$  (Typ.1.8mR)

$R_{DS(ON)}@4.5\text{ V } 3.0\text{ m}$  (Typ.2.5mR)


HF Product.

## / Applications


; : \$ :

Secondary Side Synchronous Rectification,DC-DC Converter, Motor Control, Load Switching.

## / Equivalent Circuit



## / Pinning

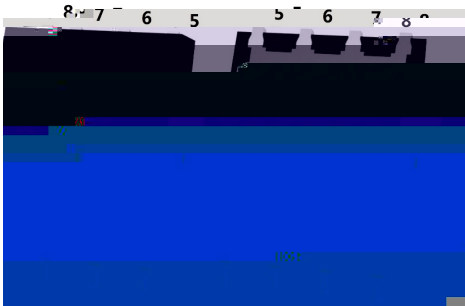

PIN1 2 3 S PIN4 G PIN5 6 7 8 D

## / Marking

See Marking Instructions.

/ Absolute Maximum Ratings( $T_a=25$ )

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DS}$	60	V
Continuous Drain Current	$I_D(T_c=25)$	158	A
Pulsed Drain Current	$I_{DM}$	316	A
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Power Dissipation	$P_D(T_c=25)$	90	W
Avalanche energy(L=0.5mH)	$E_{AS}$	380	mJ
Avalanche Current(L=0.5mH)	$I_{AS}$	30.8	A
Junction and Storage Temperature Range	$T_j, T_{stg}$	-55 to 150	
Maximum Junction-to-Ambient	t 10s	$R_{JA}$	/ W
	Steady-State		
Maximum Junction-to-Case	Steady-State	$R_{JC}$	1.39



/ Electrical Characteristics( $T_a=25$ )

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V$ $I_D=250\mu A$	60	65		V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=60V$ $V_{GS}=0V$			1	$\mu A$
Gate-Body Leakage Current Forward	$I_{GSS}$	$V_{GS}=\pm 20V$ $V_{DS}=0V$			$\pm 100$	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	1	1.6	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=20A$		1.8	2.5	m
		$V_{GS}=4.5V$ $I_D=10A$		2.4	3.5	
Forward On Voltage	$V_{SD}$	$V_{GS}=0V$ $I_S=1A$			1.2	V
Gate resistance	$R_g$	f=1MHz		1.0		
Input Capacitance	$C_{iss}$	$V_{DS}=25V$ $V_{GS}=0V$ f=1.0MHz		6700		pF
Output Capacitance	$C_{oss}$			1400		
Reverse Transfer Capacitance	$C_{rss}$			70		
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=10V,$ $V_{DS}=30V,$ $I_D=20A$		60		nC
Total Gate Charge	$Q_{g(4.5V)}$			23		
Gate Source Charge	$Q_{gs}$			16		
Gate Drain Charge	$Q_{gd}$			3		




**/ Electrical Characteristics(Ta=25 )**

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=20V$ $R_L=1$ $R_{GEN}=3$		13		ns
Turn-On Rise Time	$t_r$			4		
Turn-Off Delay Time	$t_{d(off)}$			47		
Turn-Off Fall Time	$t_f$			6.5		

**/ Electrical Characteristic Curve**

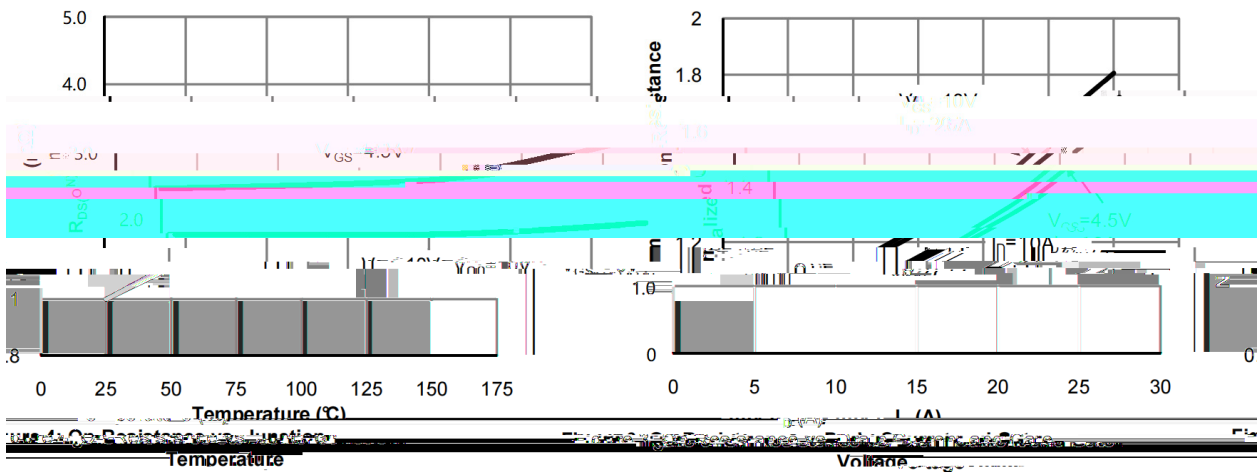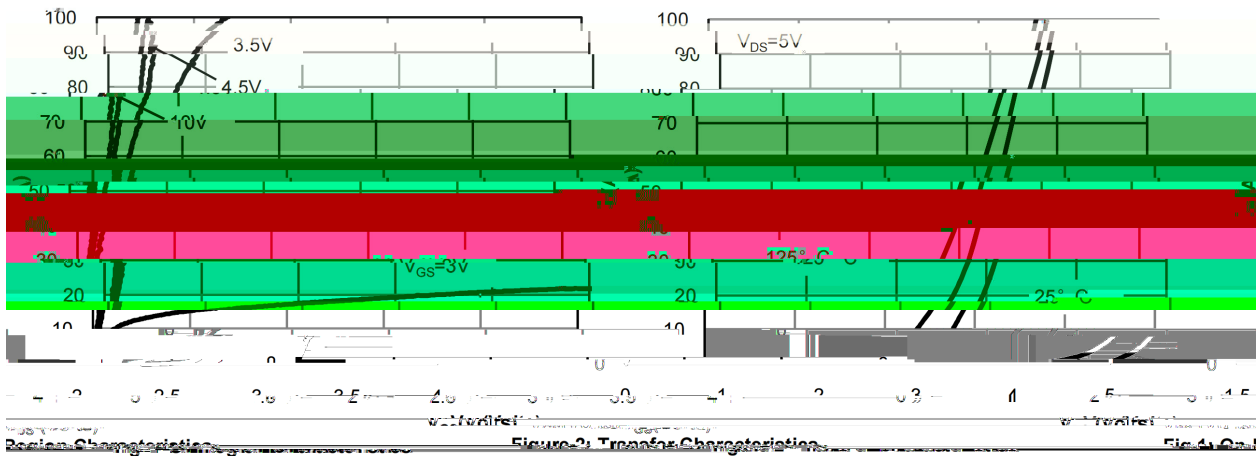


**/ Electrical Characteristic Curve**

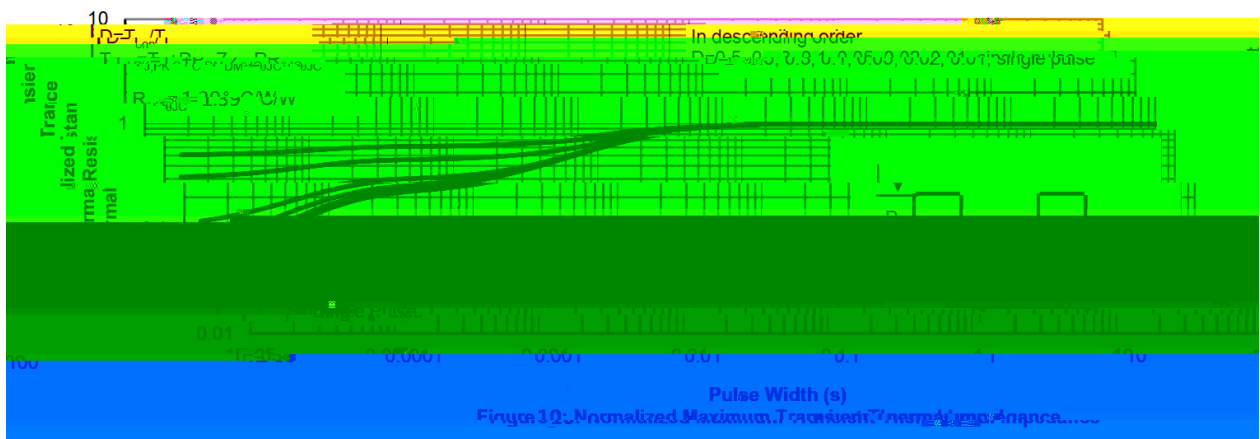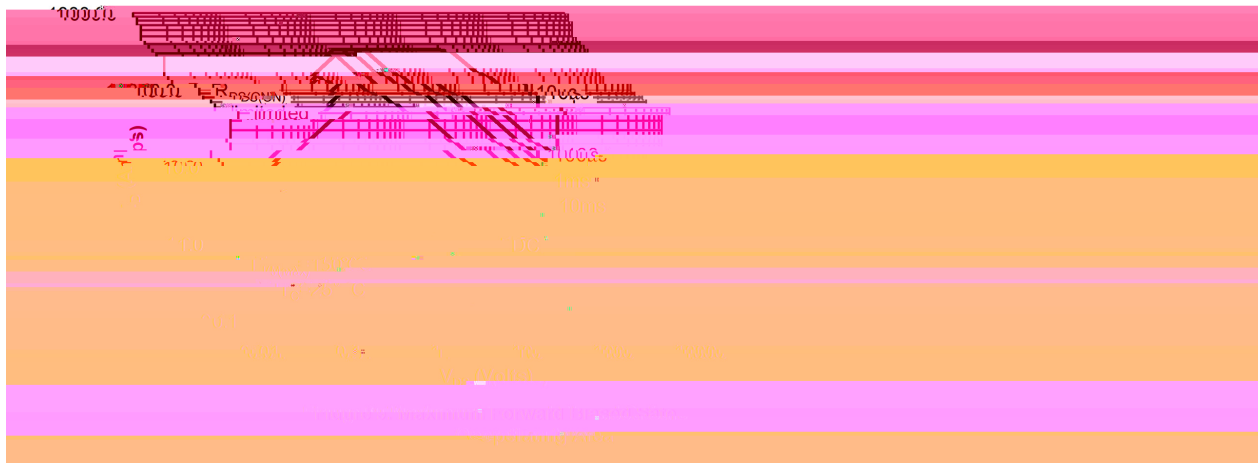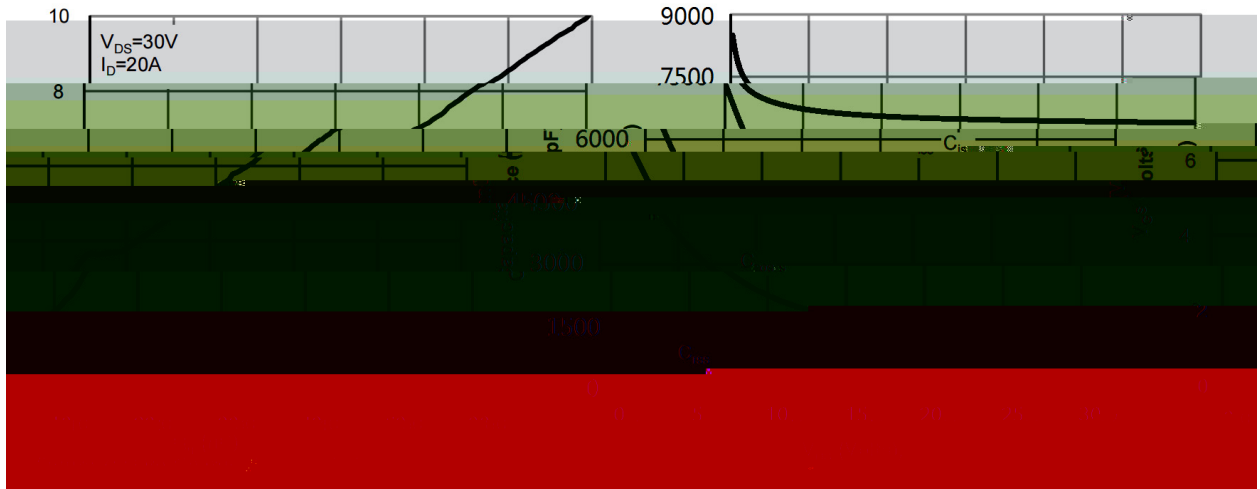

**/ Package Dimensions**

PDFN5 X6


Unit:mm

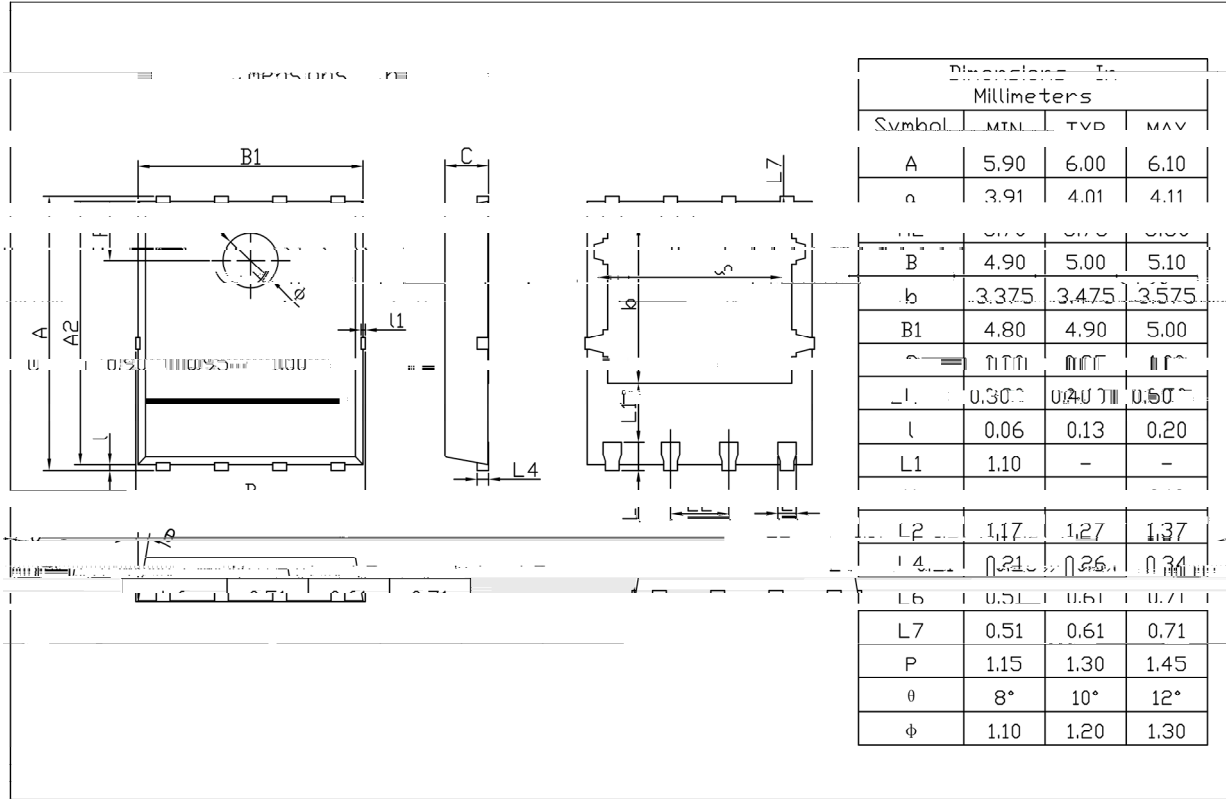

Rev.01 202209

**/ Marking Instructions**

**( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)**

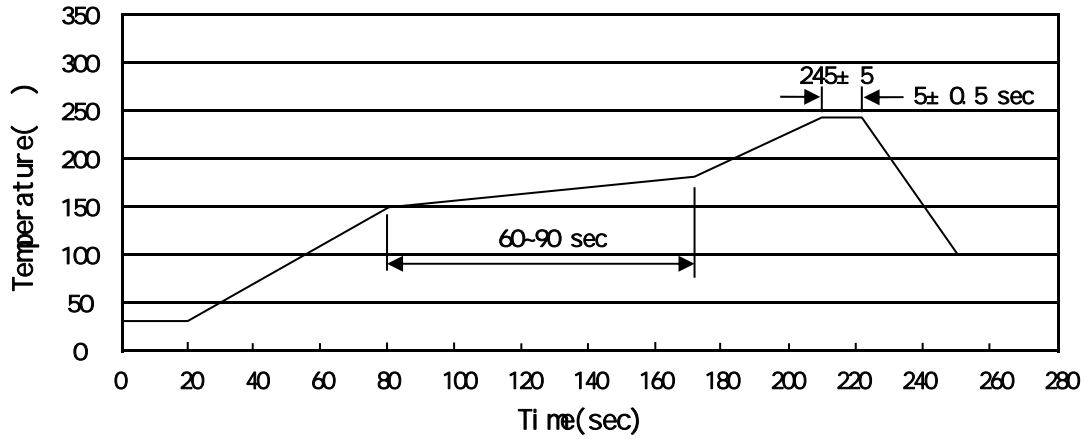

Note:

- |   |        |     |            |          |   |
|---|--------|-----|------------|----------|---|
| 1 | 150    | 180 | 60         | 90sec;   | 1.Preheating:150~180 , Time:60~90sec.     |
| 2 | 245..5 |     | 5..0.5sec; |          | 2.Peak Temp.:245..5 , Duration:5..0.5sec. |
| 3 |        |     | 2          | 10 /sec. | 3. Cooling Speed: 2~10 /sec.              |

**/ Resistance to Soldering Heat Test Conditions**

260..5                      10..1 sec.                      Temp.:260±5                      Time:10±1 sec

**/ Packaging SPEC.**

/ REEL

Package Type	Units					Dimension (unit mm <sup>3</sup> )		
	Units/Reel &	Reels/Inner Box &	Units/Inner Box &	Inner Boxes/Outer Box &	Units/Outer Box &	Reel	Inner Box	Outer Box
PDFN5x6	5,000	2	10,000	6	60,000	13"x12	360x360x50	380x335x366

**/ Notices**