


BRCS025N10SHSL

BRCS025N10SHSL




		±	

BRCS025N10SHSL



/ Electrical Characteristic Curve

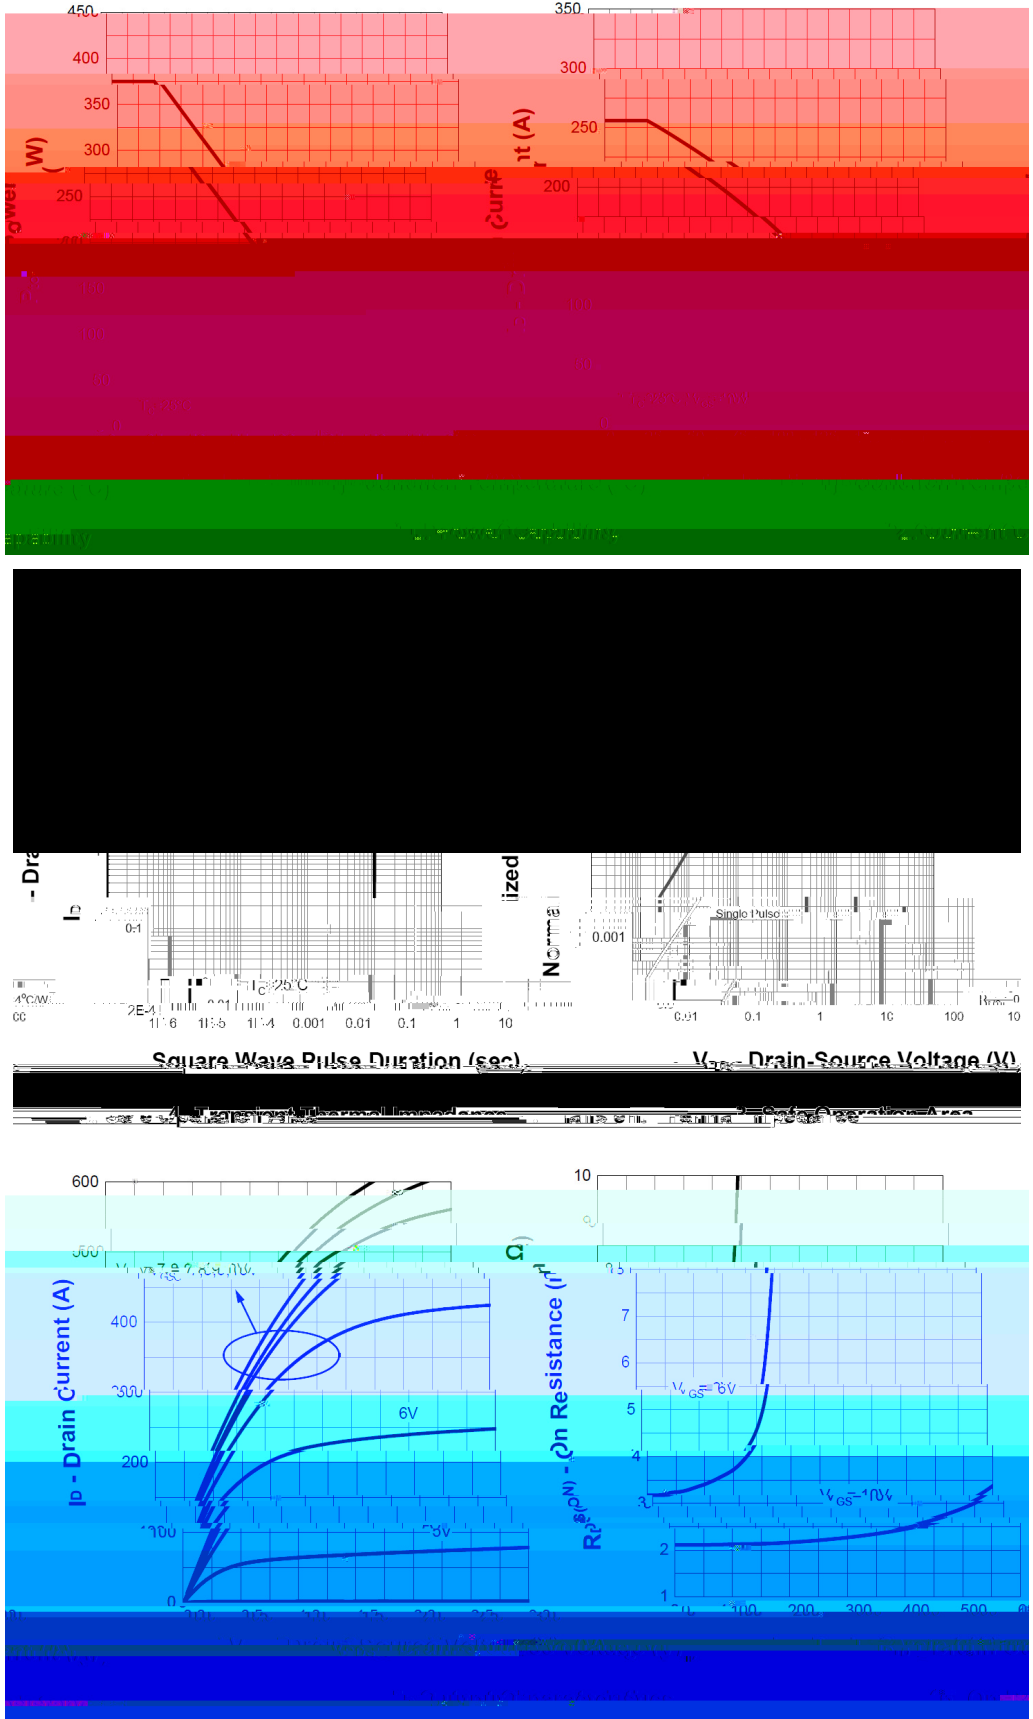


/ Electrical Characteristic Curve

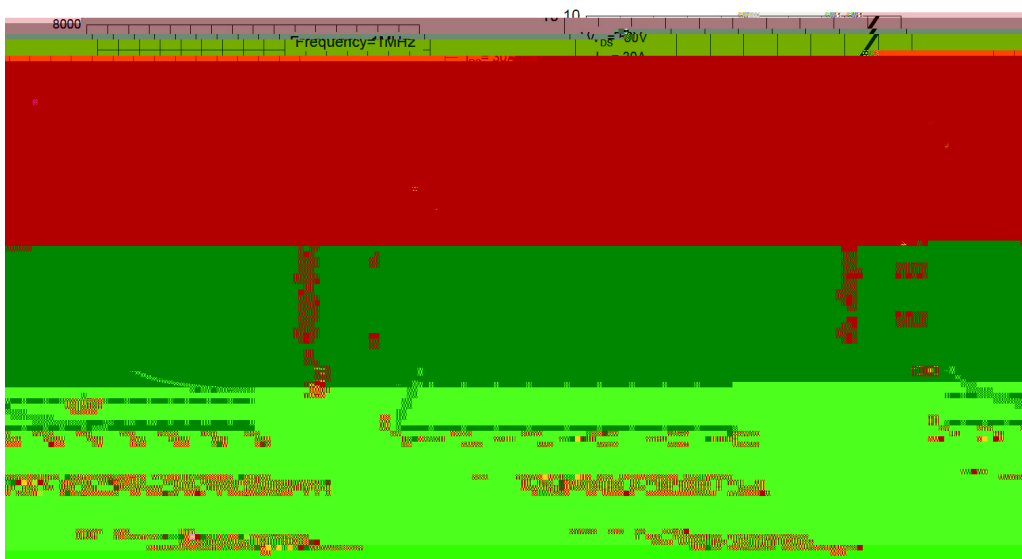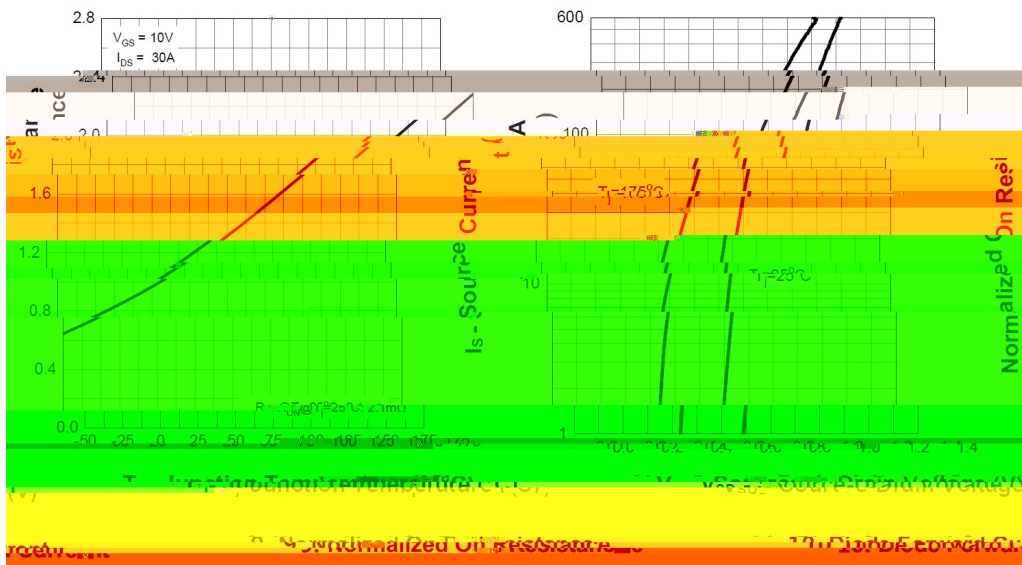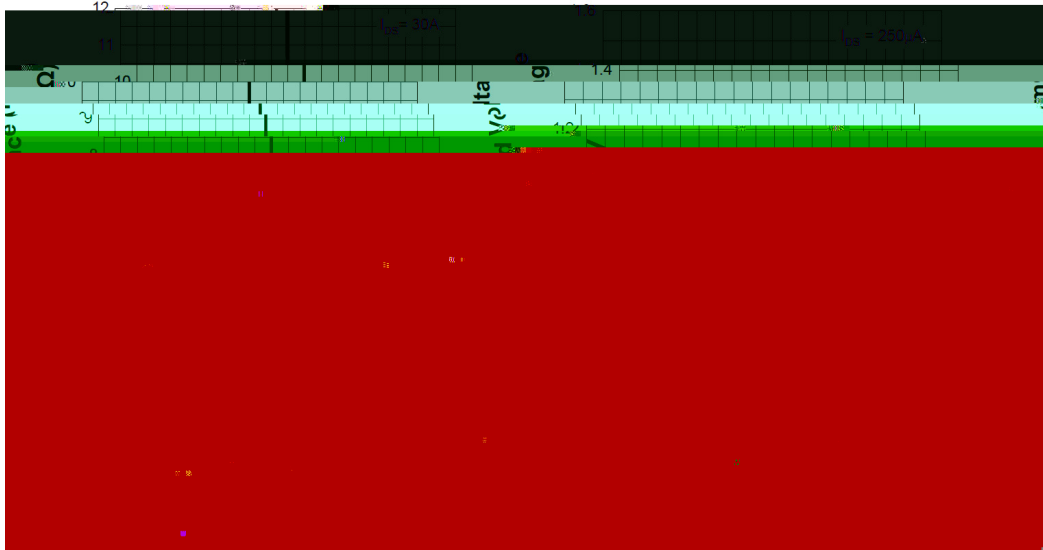


/ Package Dimensions

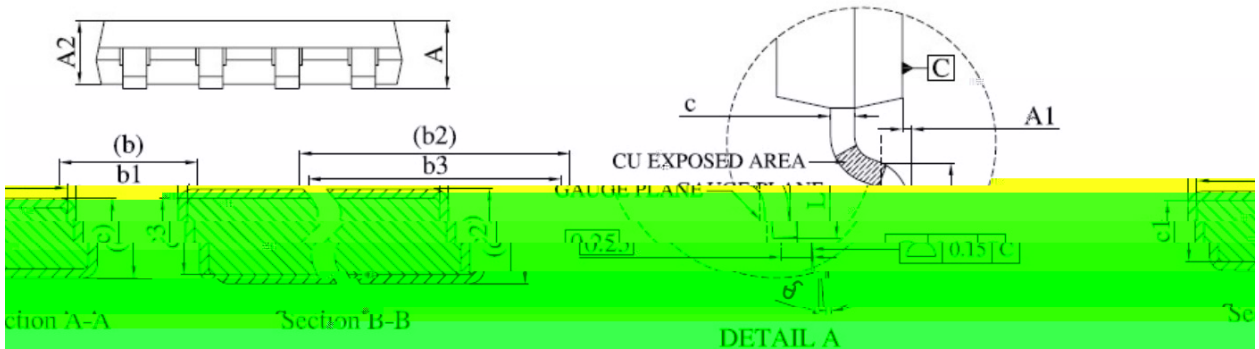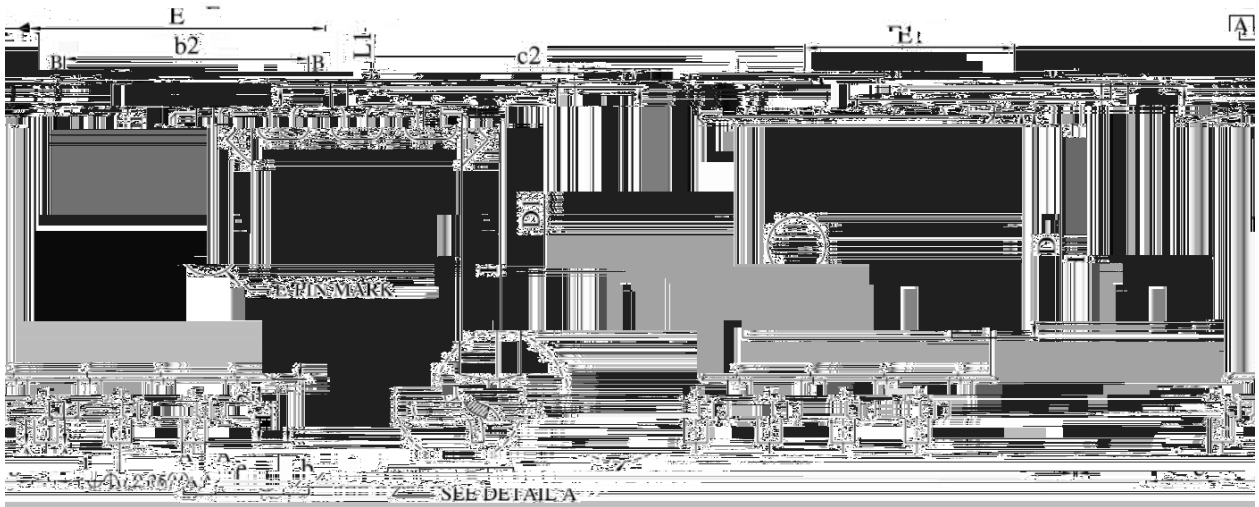

Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	MIN.	MAX.	Symbol	MIN.	MAX.
A	1.00	1.30	E	4.95	5.30
A1	0.00	0.15	EL	3.50	3.70
A2	0.98	1.12	e	1.27 BSC.	
b	0.35	0.50	H	5.95	6.25
b1	0.32	0.46	i	0.25	

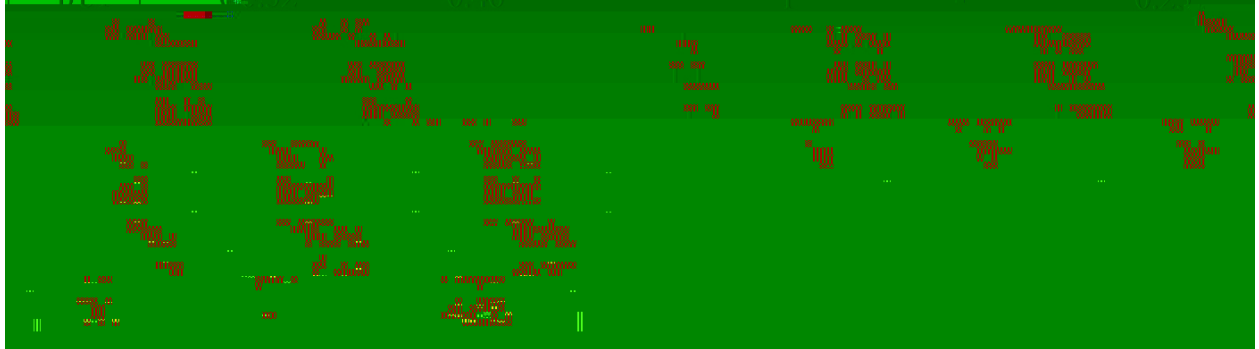

/ Marking Instructions

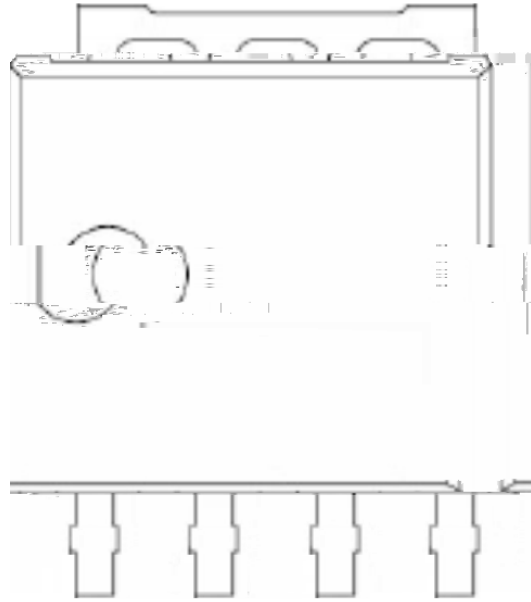


9|

!!!!

.....

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

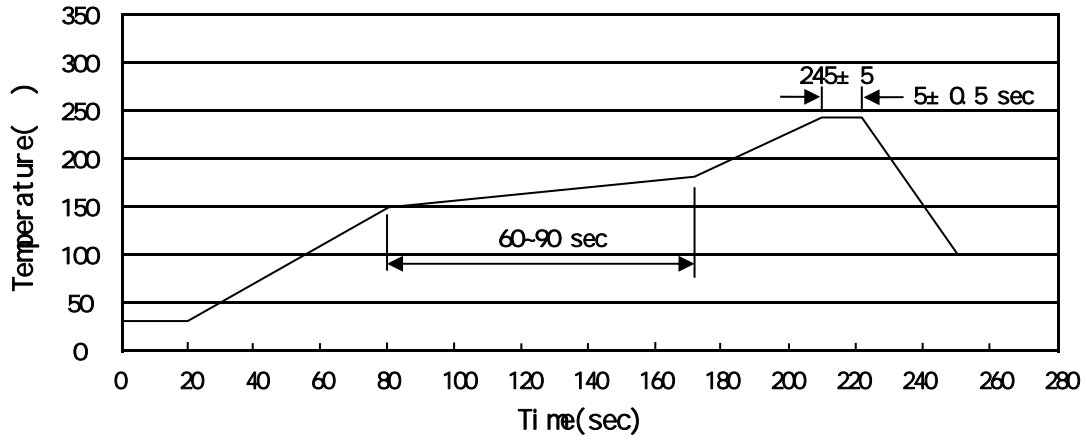

... ..

/ Resistance to Soldering Heat Test Conditions

... ..

/ Packaging SPEC.

	&	&	&	&	&			

	&	&	&	&	&			

/ Notices