




22.


--	--	--	--	--



N MOS

VDS (V) = 30V
ID = 67A (VGS = ±20V)
RDS(ON)@ 10V 6mR
HF Product.

DC/DC






	'c		
	'c		
			°c
			'c

B






Tr 00.564 0 000.564 0 015.3415


B




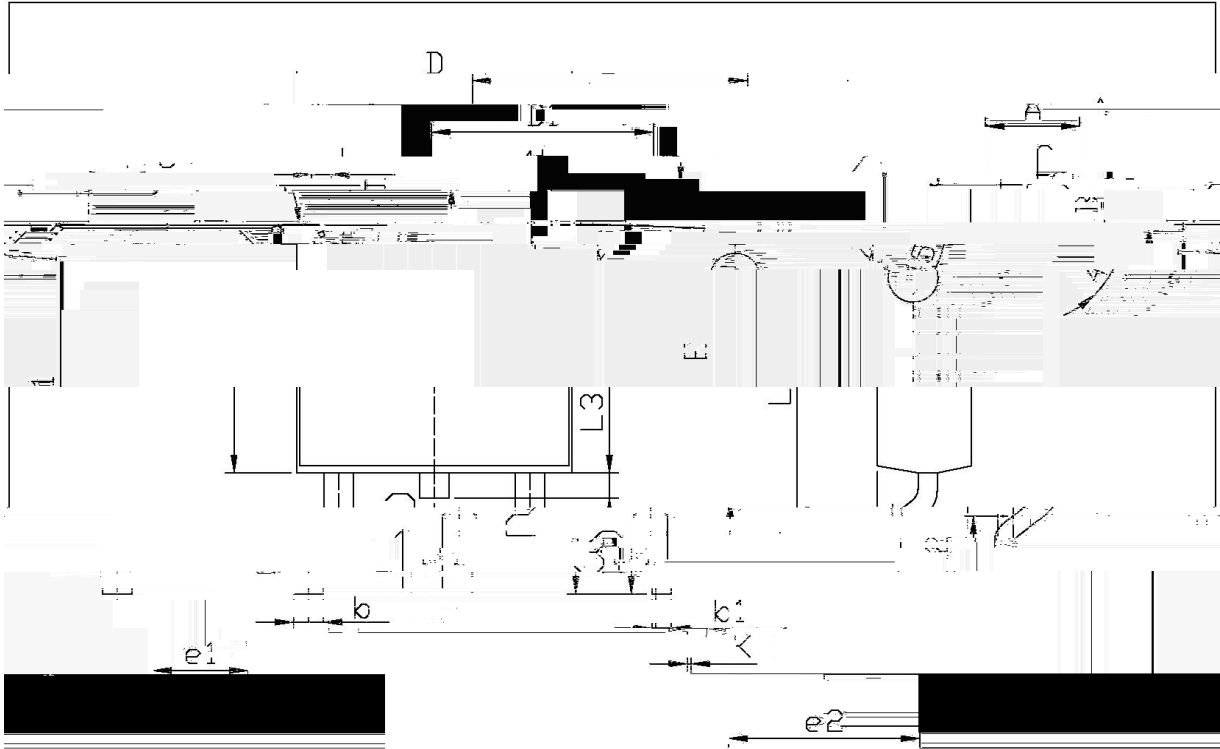


1/2: mm


Symbol	Material	Dimensions	
B	0.95	1.25	
a	2.24	2.34	
9.85	70.35	0.45	0.55
6.45	6.75	0.60	0.9
5.50	5.50	0.00	



B

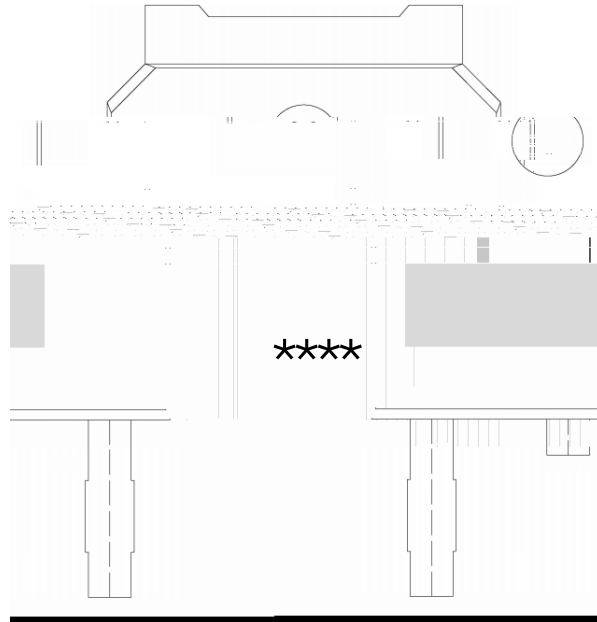

060N03




Temperature Profile for IR Reflow Soldering(Pb-Free)

±

±

±


±



±

±

°C



	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	只/卷盘	卷盘/盒	只/盒	盒/箱	只/箱			
TO-252	2,500	2	5,000	6	30,000	13" x16	360x360x50	380x335x366

	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
	只/套管	套管/盒	只/盒	盒/箱	只/箱			
TO-251/252	75	28	2,100	6	18,000	526x205x525	555x164x50	575x290x180

