



SOT23-6 P MOS
P- CHANNEL MOSFET in a SOT23-6 Plastic Package.

$R_{DS(ON)}$ 110m Ω ,VGS=-4.5V
 $R_{DS(ON)}$ 150m Ω ,VGS=-2.5V
HF Product.

Primarily the display screen drive applications.



PIN1 D PIN 2 D PIN 3 G PIN 4 S PIN 5 D PIN 6 D

Marking	2301E ****
---------	---------------

Rev.A Aug.-2019

Rev.A Aug.-2019




2301E:

****:

Note:

2301E Product Type

****: Company Code.

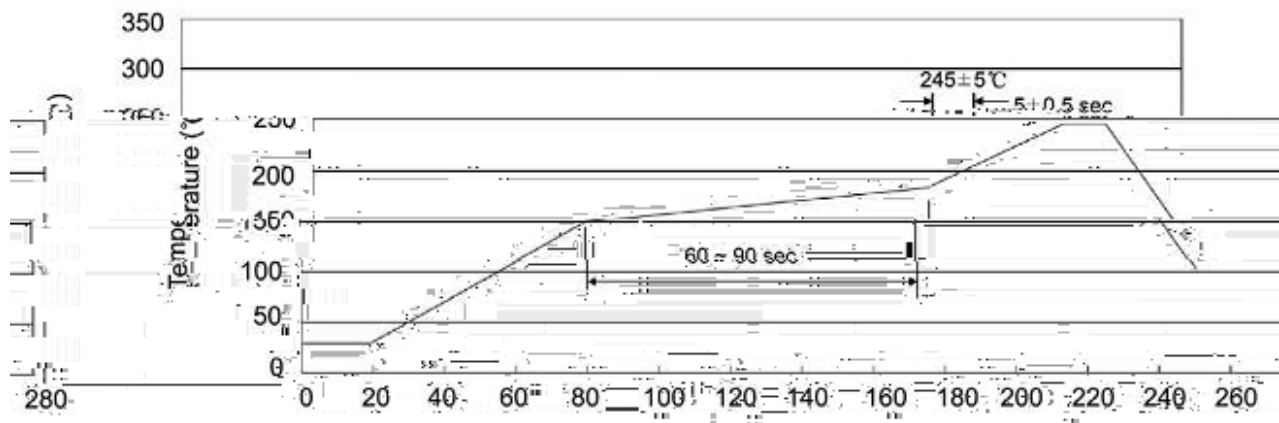

说明：

- 1、预热温度 ~180℃，时间 60 ~
- 2、峰值温度 ±5℃，时间持续为 5±
- 3、

- 1.Preheating:150~180℃, Time:60~90sec.
- ±5℃, Duration:5±0.5sec.