



Rev.A Oct.-2023

TO-251 N  
N-CHANNEL MOSFET in a TO-251 Plastic Package.

$V_{DS} (V) = 100V$      $I_D = 37A$  ( $V_{GS} = \pm 20V$ )  
 $R_{DS(ON)} @ 10V$  25mR (Typ. 20mR)  
 $R_{DS(ON)} @ 4.5V$  35mR (Typ. 25mR)  
 HF Product.

LED

Boost converters and synchronous rectifiers for consumer, telecom, industrial power supplies and LED backlighting.

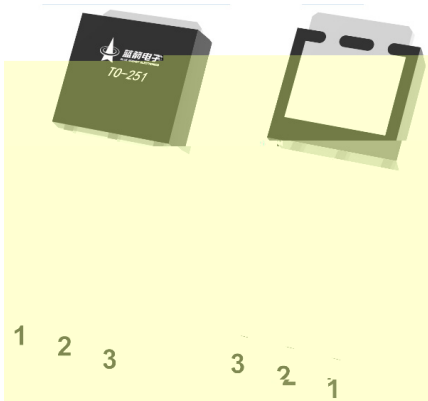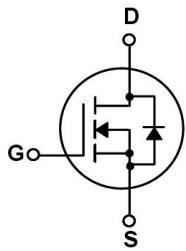

PIN 1 G      PIN 2 D      PIN 3 S

See Marking Instructions.


Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DSS}$	100	V
Drain Current	$I_D(T_C=25^\circ\text{C})$	37	A
Drain Current - Pulsed	$I_{DM}$	117	A
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Avalanche Current	$I_{AS}$	7	A
Single Pulsed Avalanche Energy	$E_{AS}$	14.4	mJ
Power Dissipation	$P_D(T_C=25^\circ\text{C})$	68	W
Storage Temperature Range	$T_{stg}$	-55 150	
Thermal Resistance-Junction to Ambient	$R_{JA}$	20	/W




Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=50V$ $R_L=5.5$ $R_{GEN}=3.0$		5		ns
Turn-On Rise Time	$t_r$			3.2		
Turn-Off Delay Time	$t_{d(off)}$			21		
Turn-Off Fall Time	$t_f$			3		





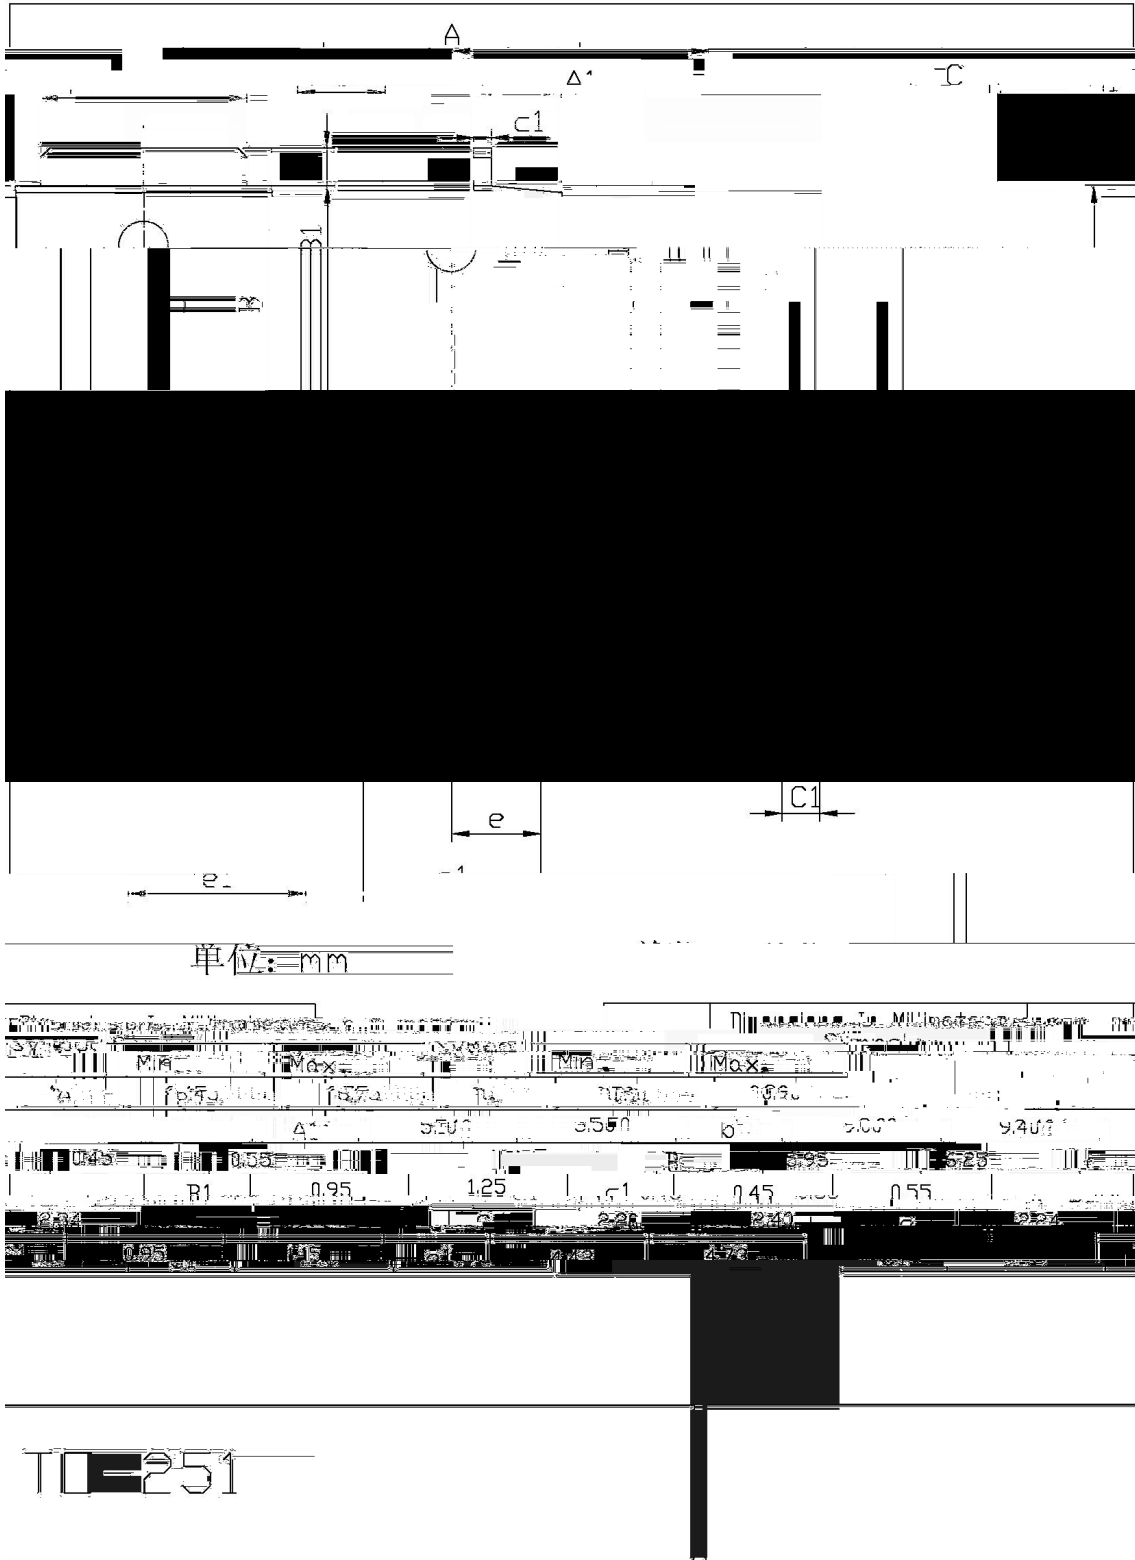

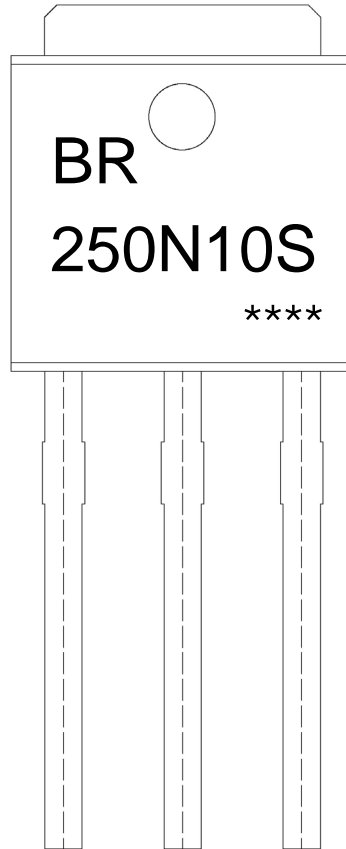

BR

) , ' E ( ' J


!!!!

Note:

BR: Company Code

250N10S: Product Type Code

\*\*\*\*: Lot No. Code, code change with Lot No

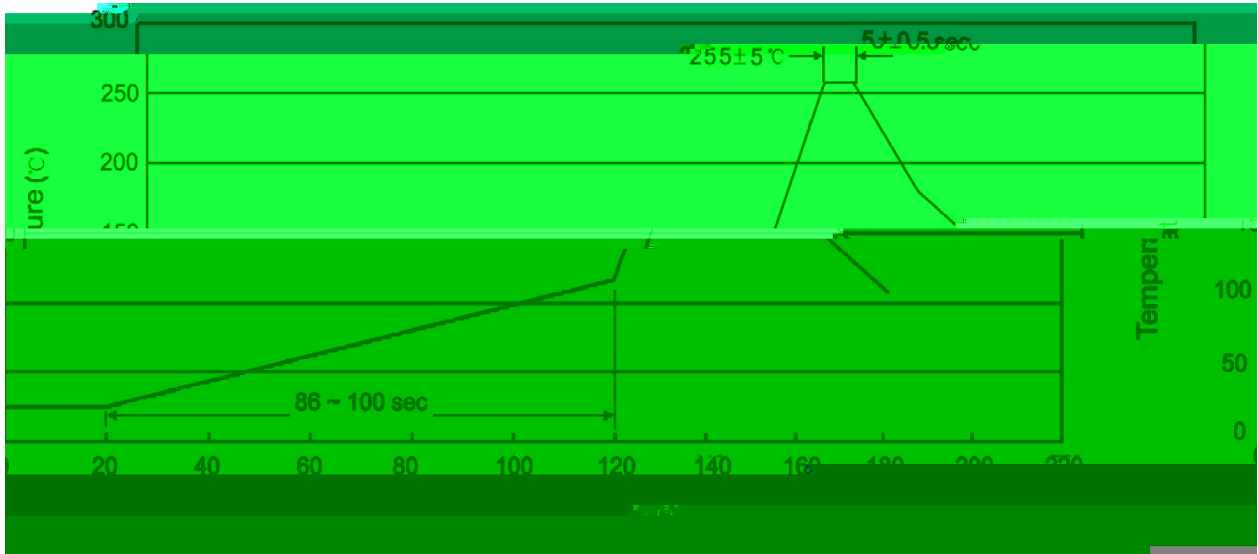

Note:

- |   |        |     |            |          |                                           |
|---|--------|-----|------------|----------|-------------------------------------------|
| 1 | 25     | 150 | 60         | 90sec;   | 1.Preheating:25~150 , Time:60~90sec.      |
| 2 | 255..5 |     | 5..0.5sec; |          | 2.Peak Temp.:255..5 , Duration:5..0.5sec. |
| 3 |        |     | 2          | 10 /sec. | 3. Cooling Speed: 2~10 /sec.              |

2 r5 - 08829D