

BRCS26N50PA


--	--	--	--

/ Electrical Characteristics(Ta=25)

			μ			
						μ
			μ			
	Qg					
	Qgs					
	Qgd					
Turn-ON Delay Time						


- 1. 300μs 2%
- 2.
- N

/ Electrical Characteristic Curve

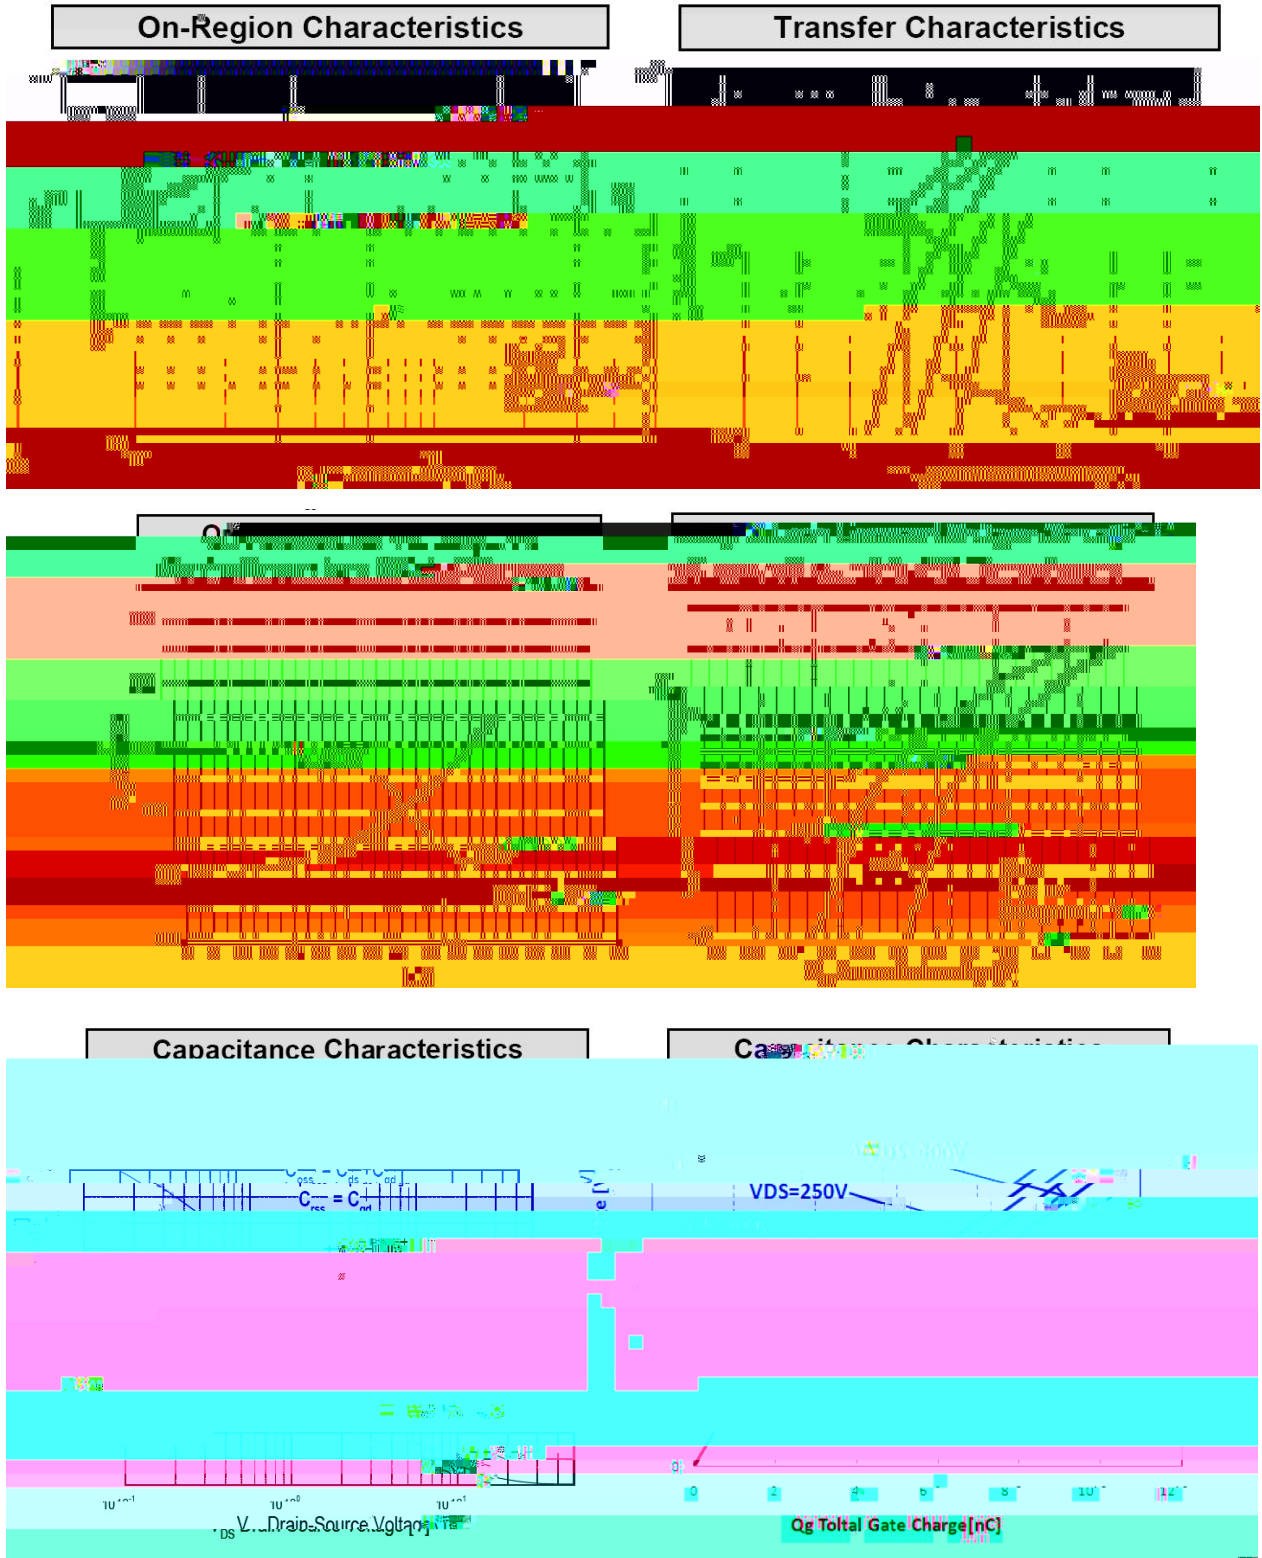


/ Electrical Characteristics(Ta=25)


Breakdown Voltage Variation

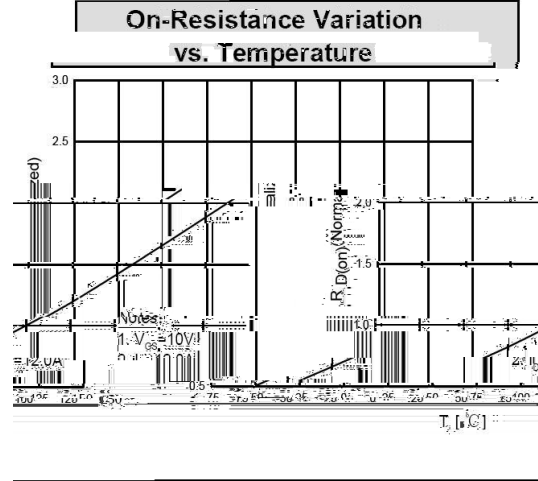


Maximum Safe Operating Area

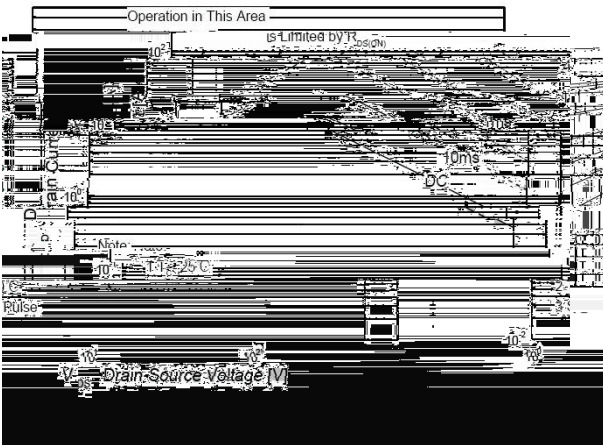


Transient Thermal Response Curve

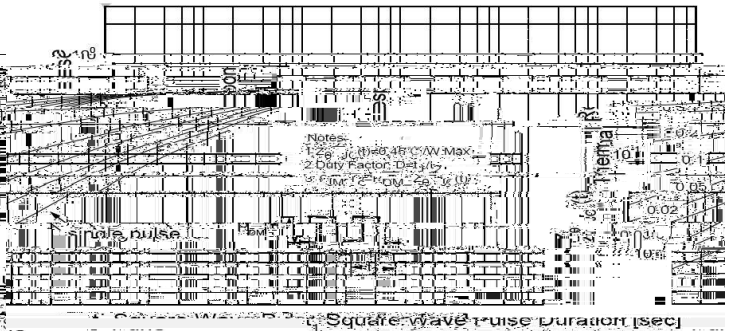

/ Package Dimensions

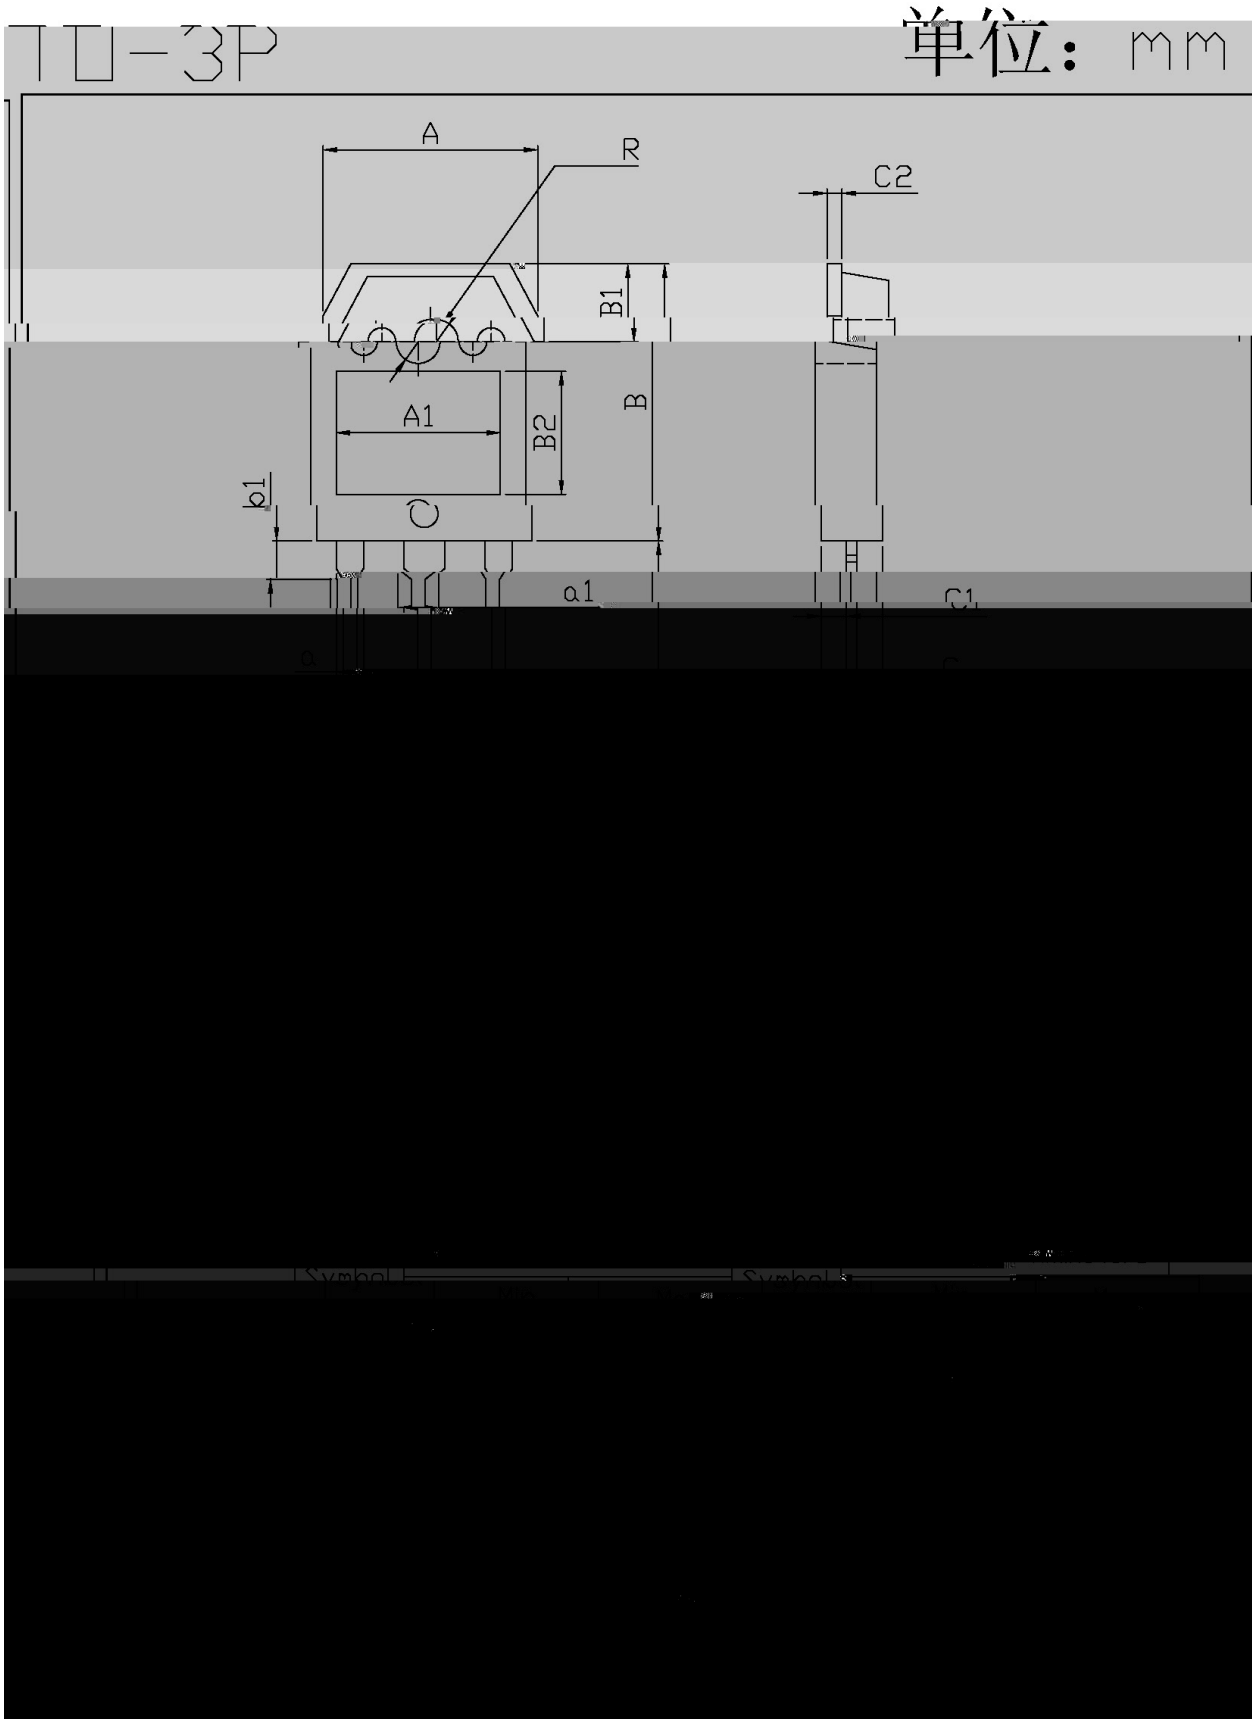


/ Marking Instructions

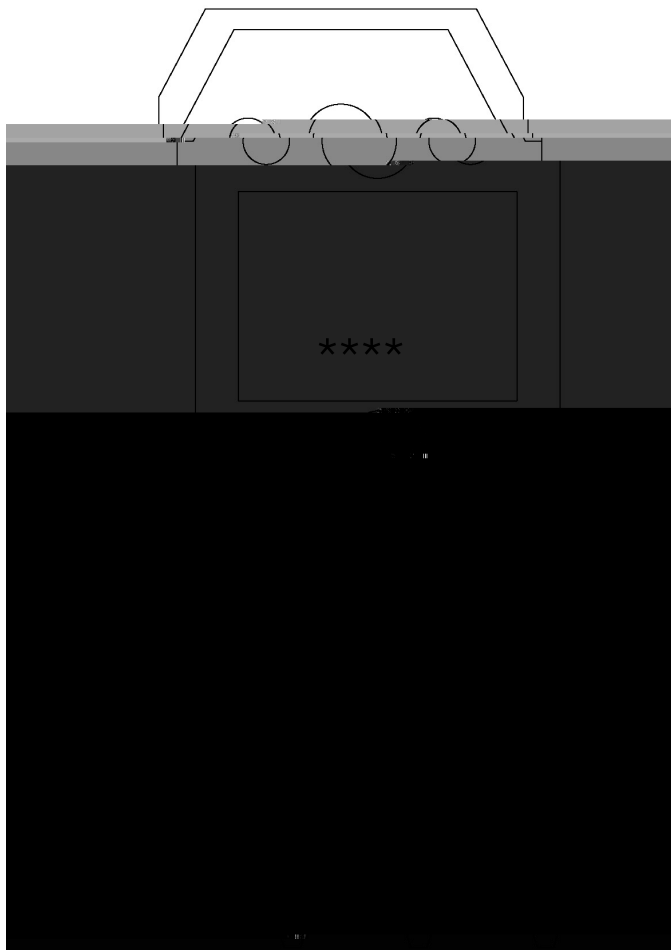

:

() / Temperature Profile for Dip Soldering(Pb-Free)

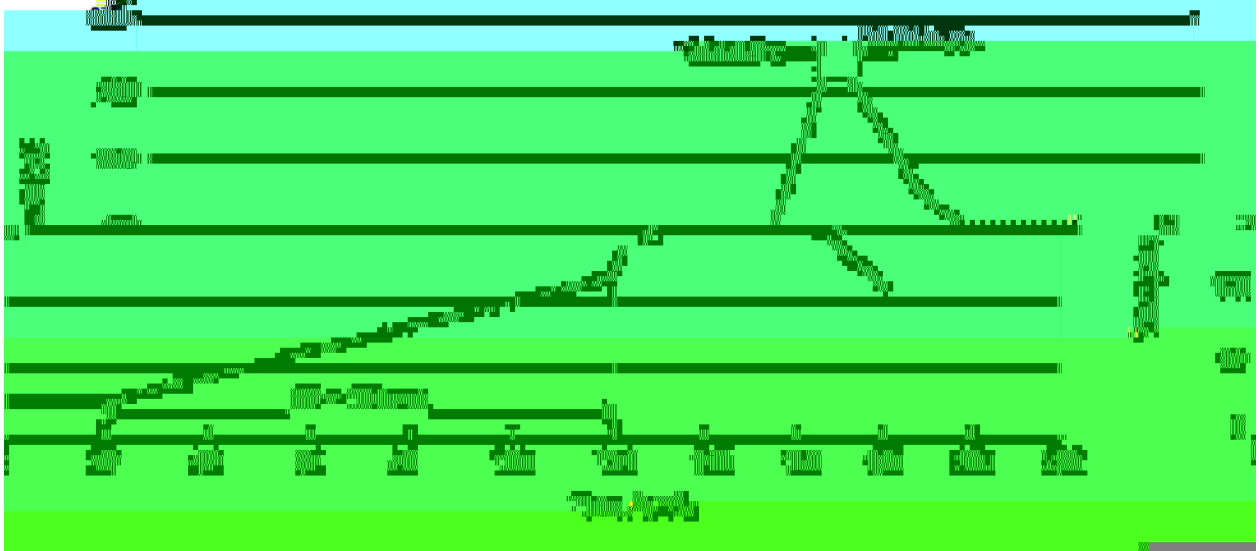

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱