
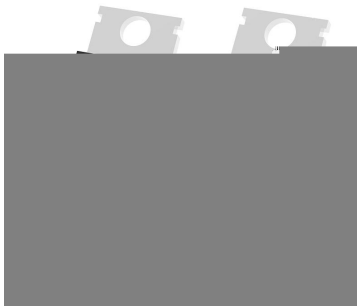


/ Descriptions

/ Features

DC/DC






/ Marking



--	--	--	--




/ Electrical Characteristic Curve

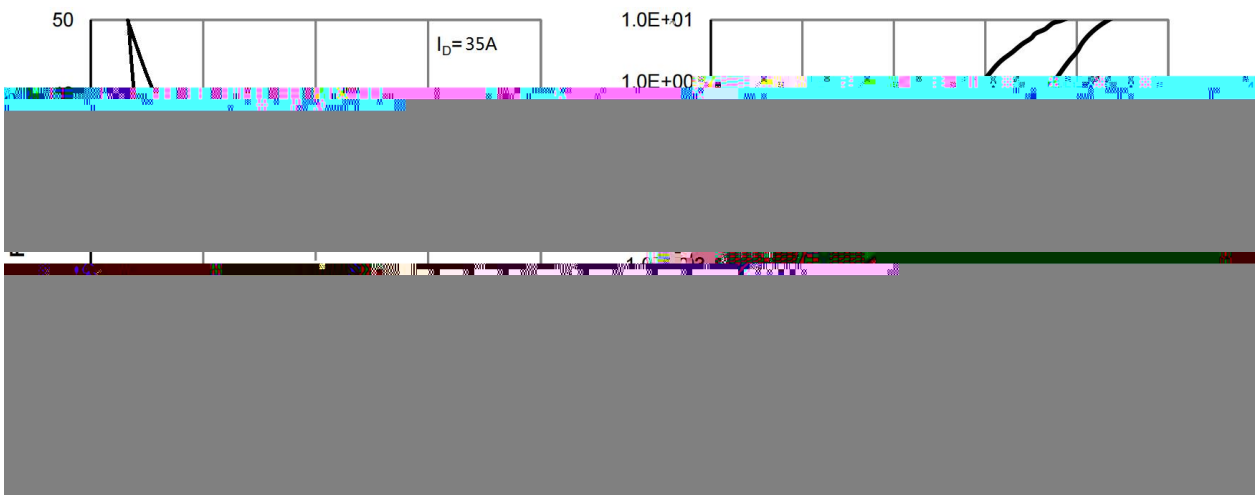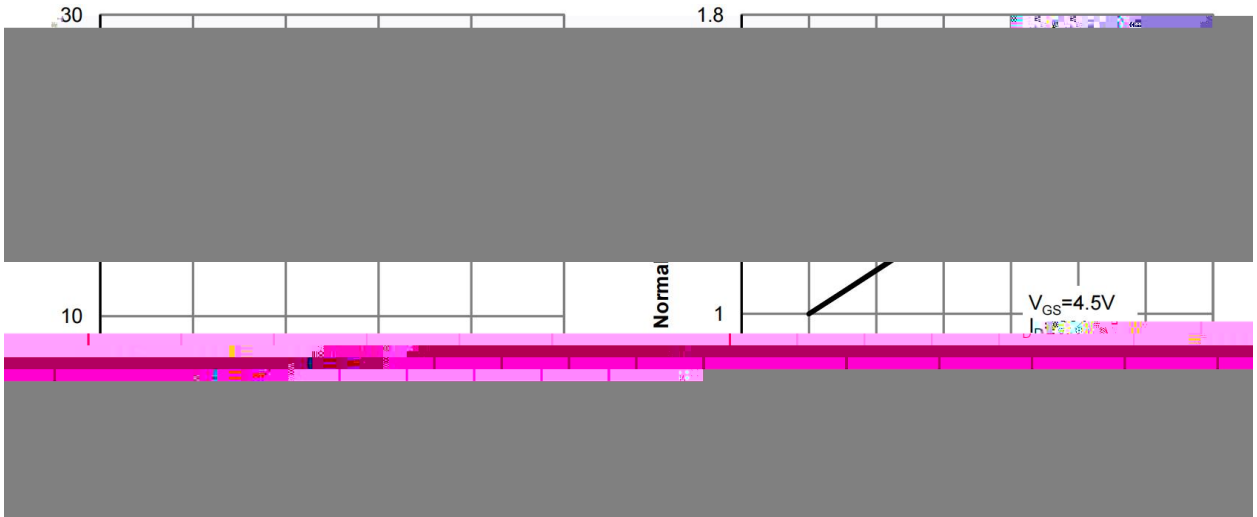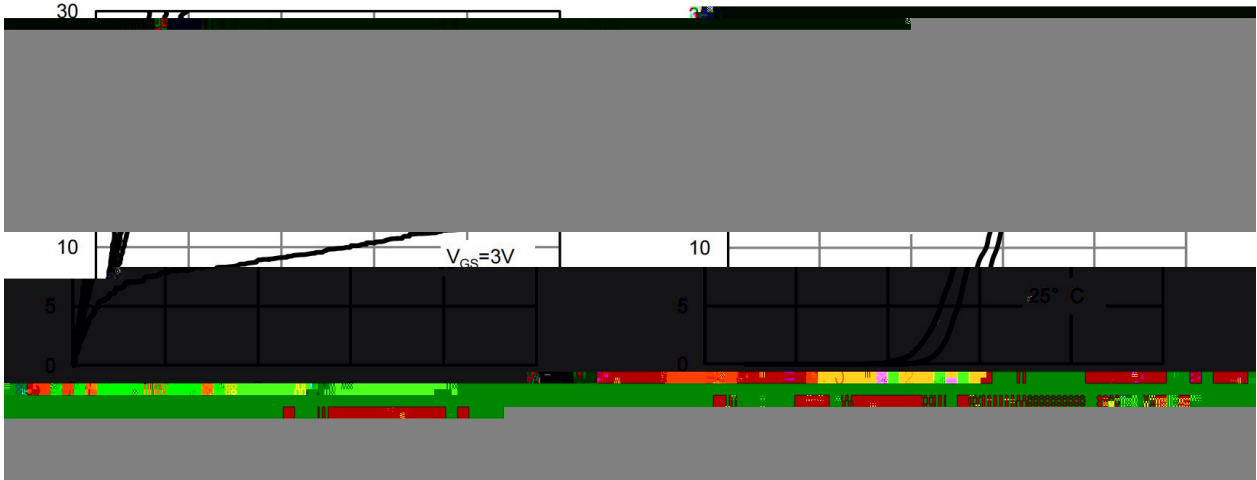

/ Electrical Characteristic Curve

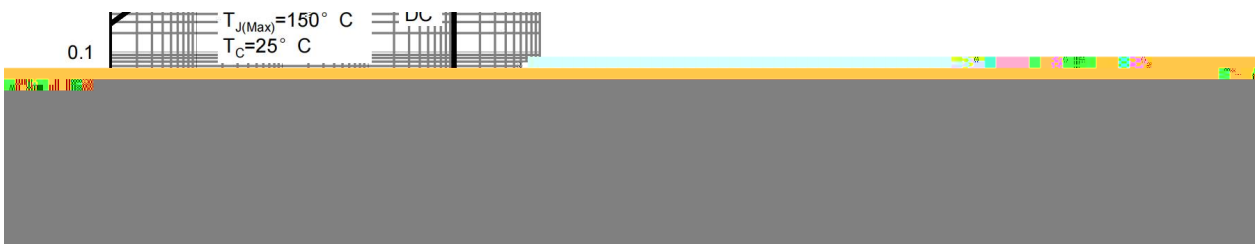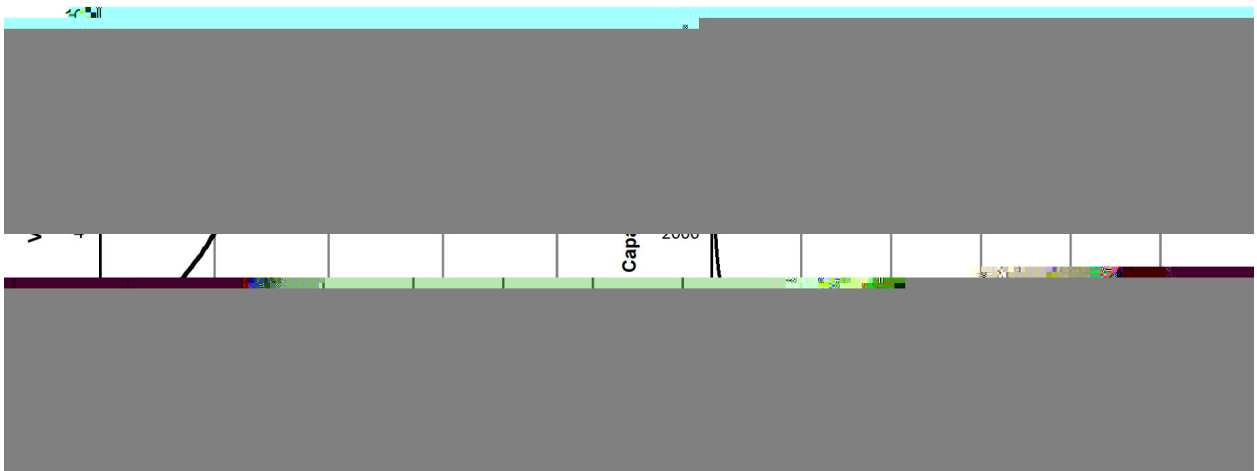


/ Package Dimensions

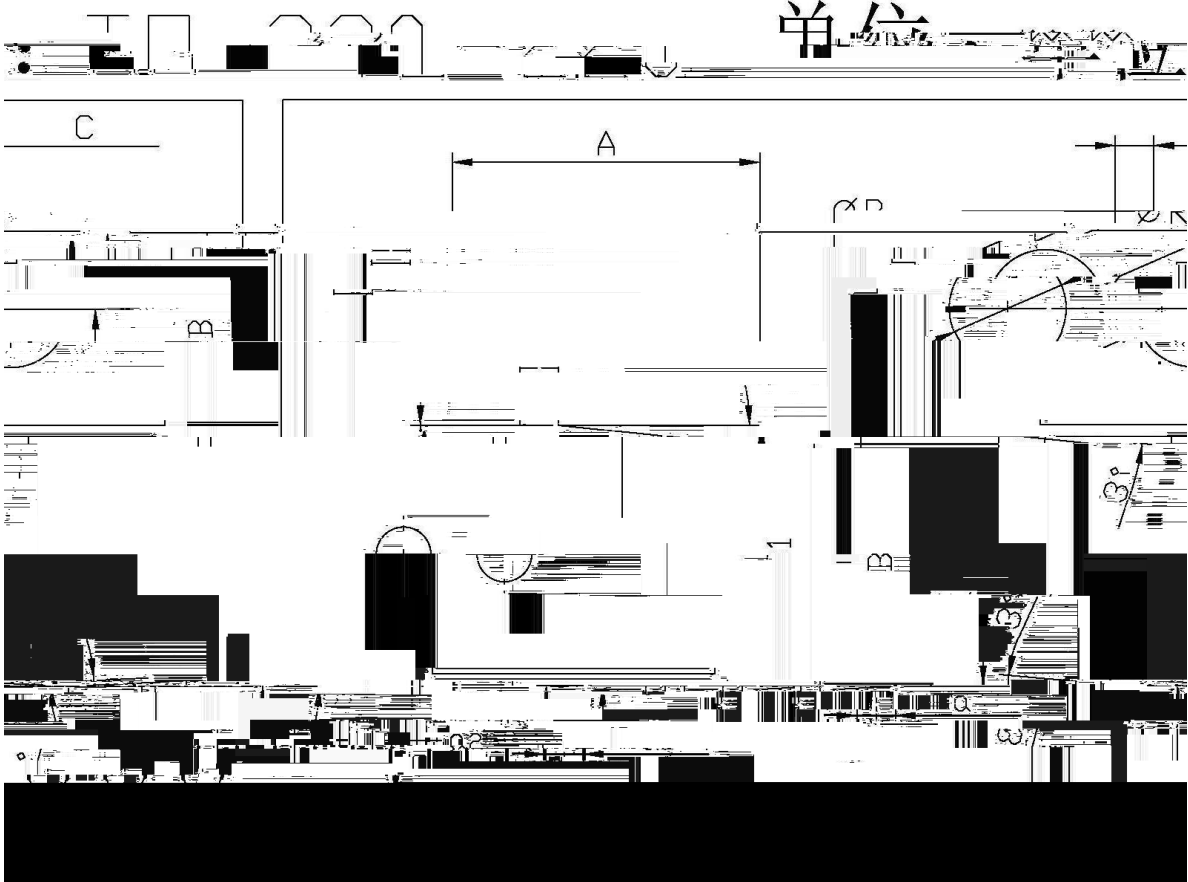

Dimensions In Millimeters		Dimensions In Millimeters	
Min	Max	Min	Max
9.8	10.2	C	12
7.5	8.0	C1	6.7
15.7	16.1	B	9.0
13.6	14.0	C2	9.6
1.32	1.4	0.4	0.6
			1.22


/ Marking Instructions

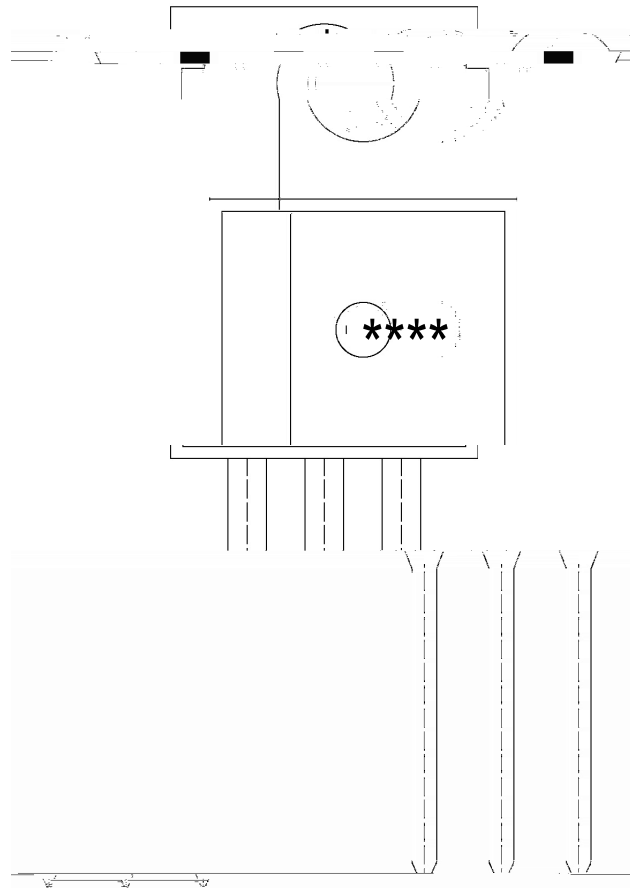

BR
3710L



() / Temperature Profile for Dip Soldering(Pb-Free)

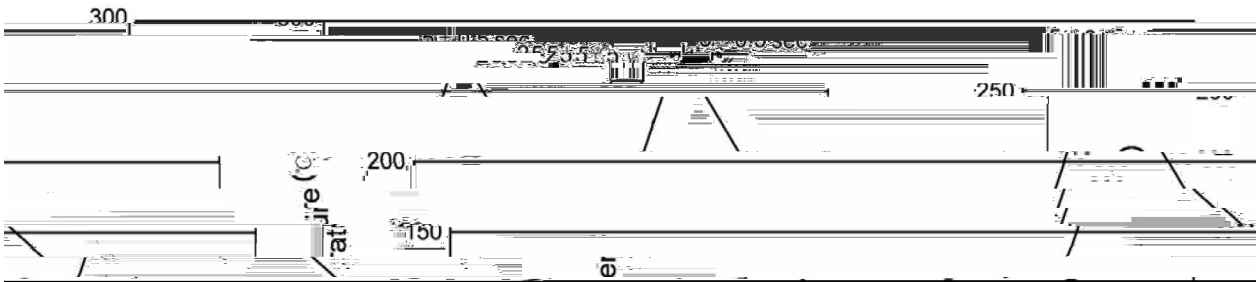

± °C ± °C ± °C ± °C

/ Resistance to Soldering Heat Test Conditions

± °C ± °C °C

/ Packaging SPEC.

封						Bag	Inner Box	Outer Box
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

封						Tube	Inner Box	Outer Box
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices