

**BRCS4266SCQ**


Rev.A Mar.-2023

**DATA SHEET**


Parameter	Symbol	Rating	Unit
-----------	--------	--------	------




**/ Electrical Characteristic Curve**

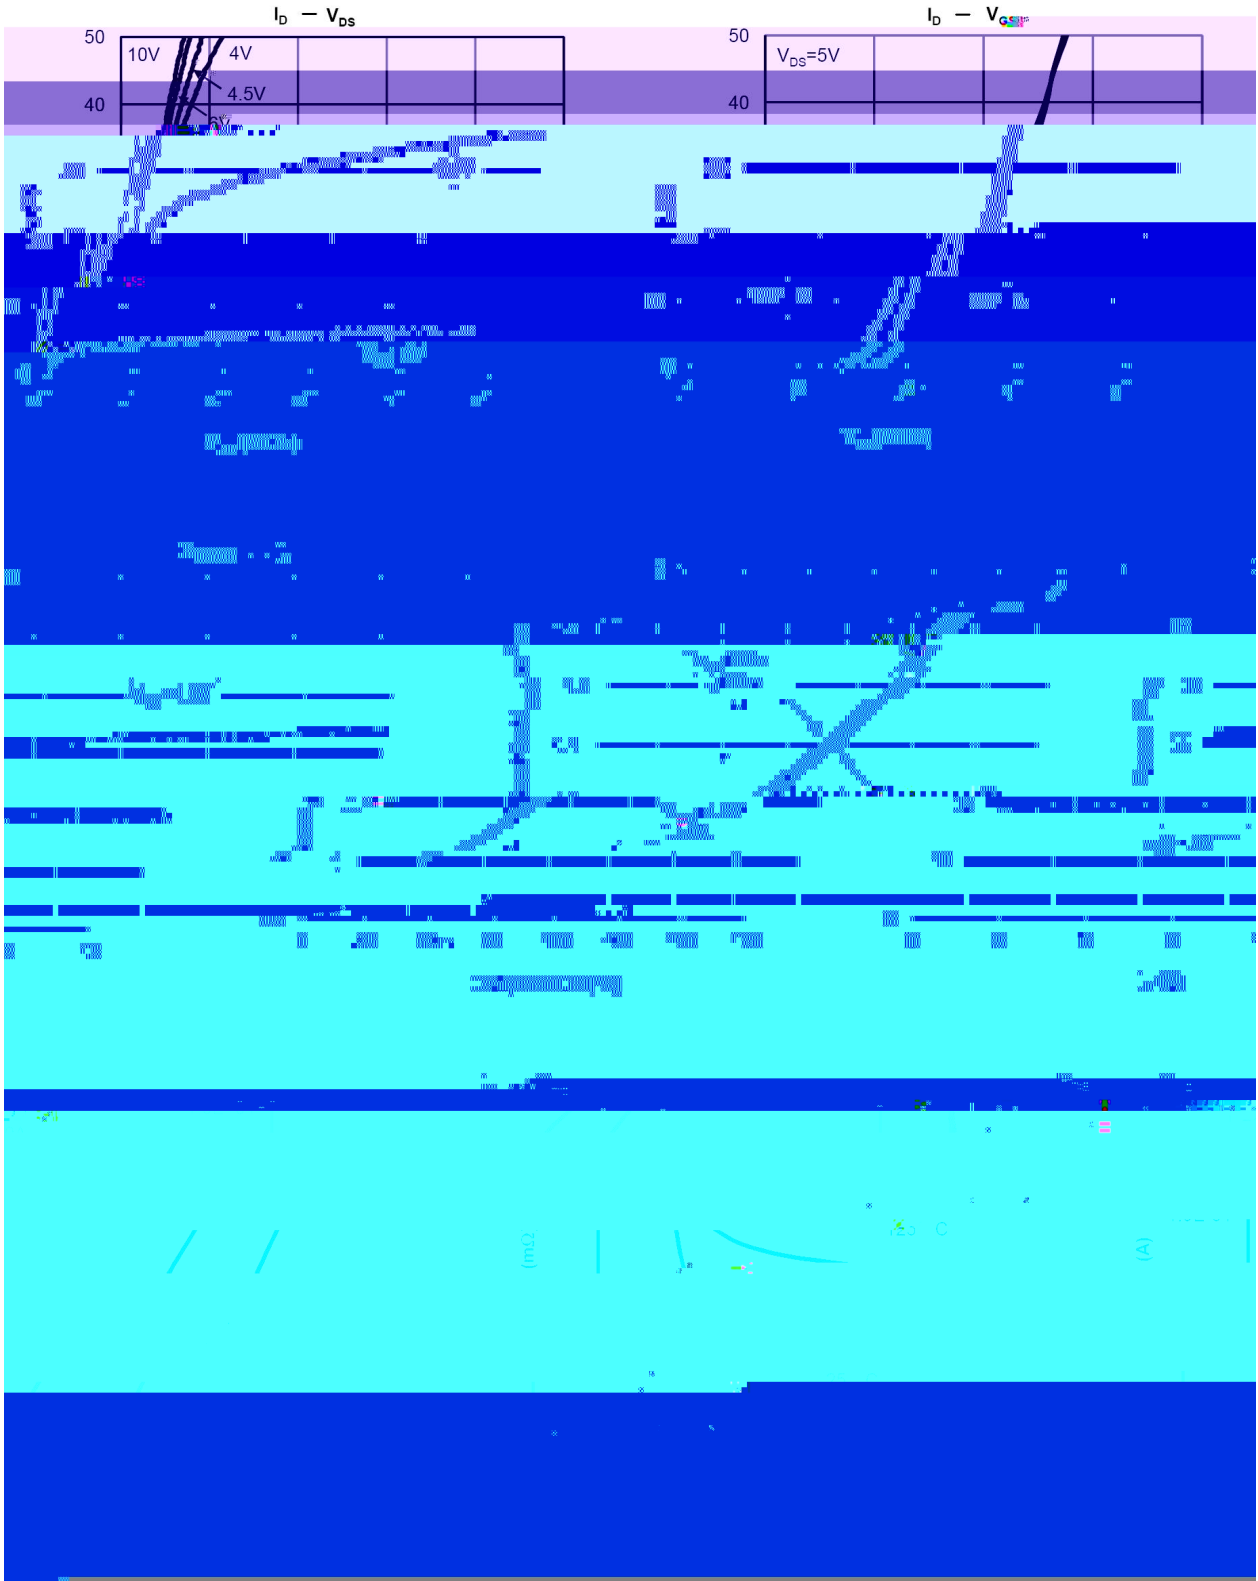


**/ Electrical Characteristic Curve**

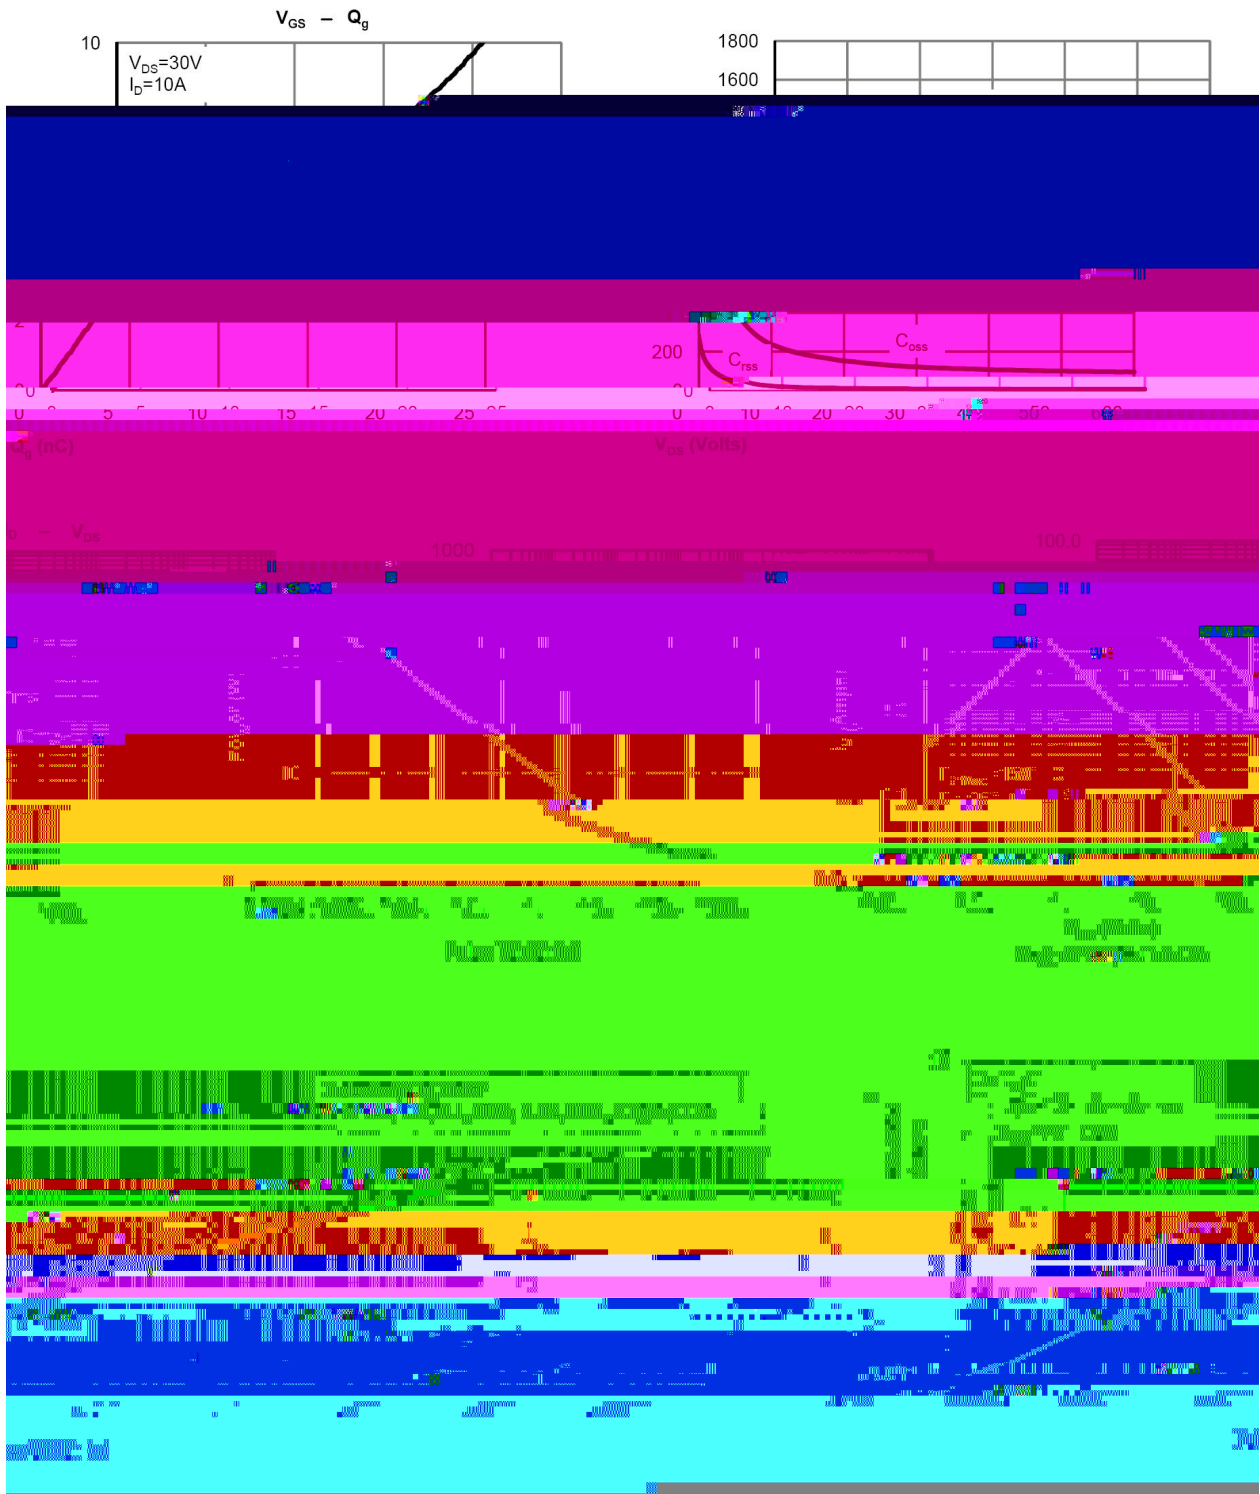

/ Test Circuit & Waveform

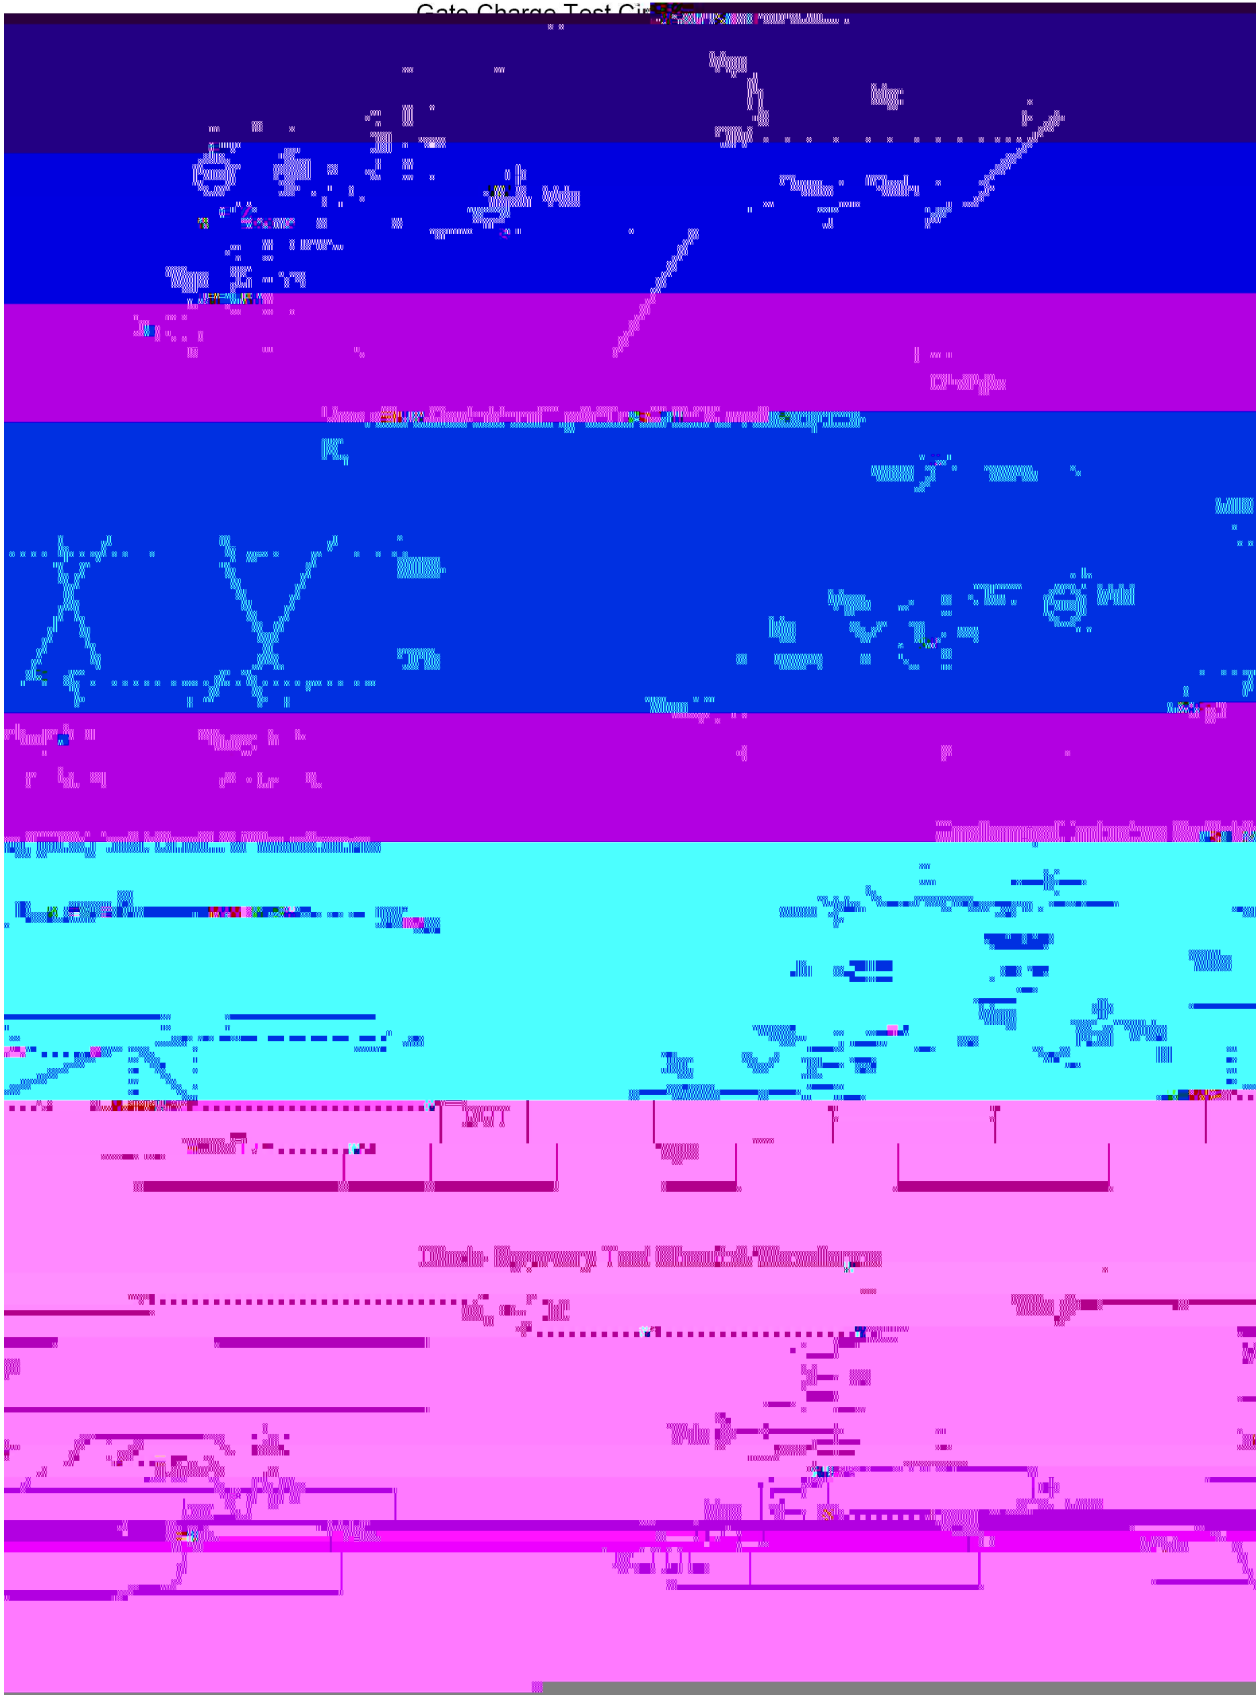

**/ Package Dimensions**

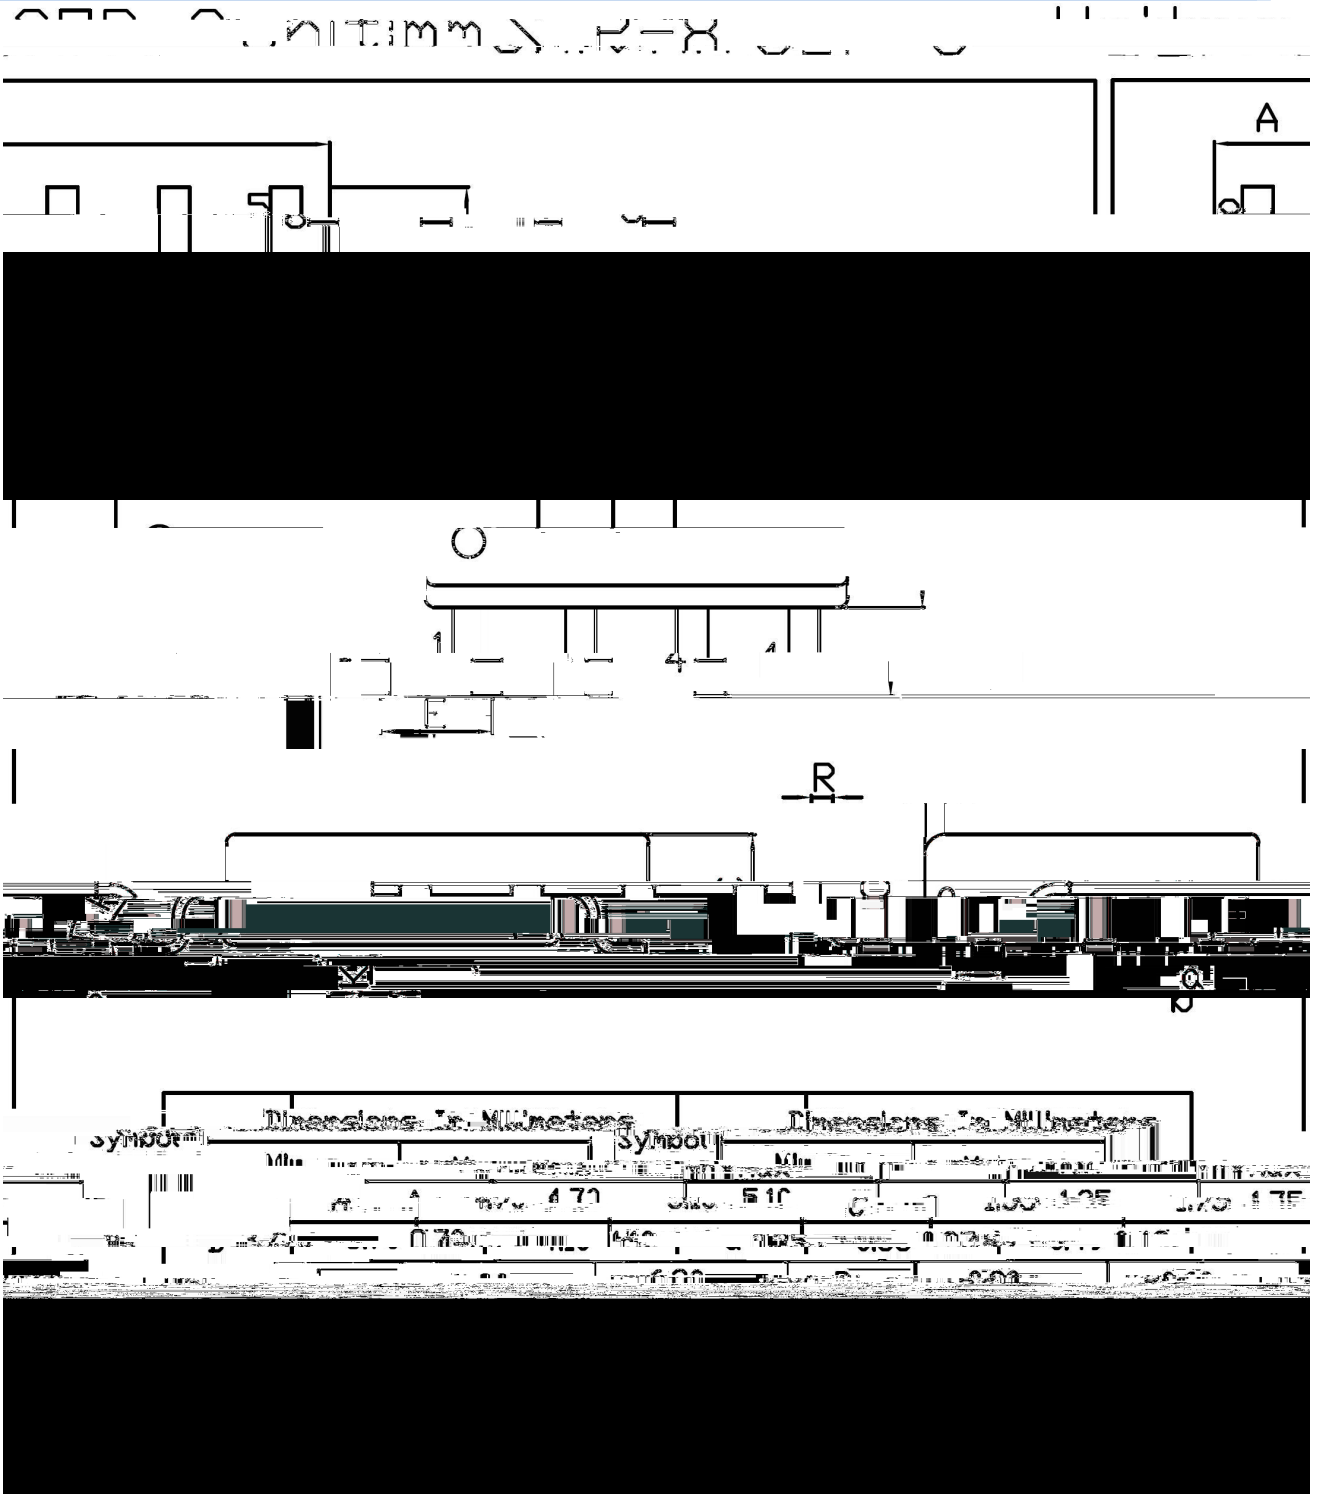


**/ Marking Instructions**

BR

Q

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

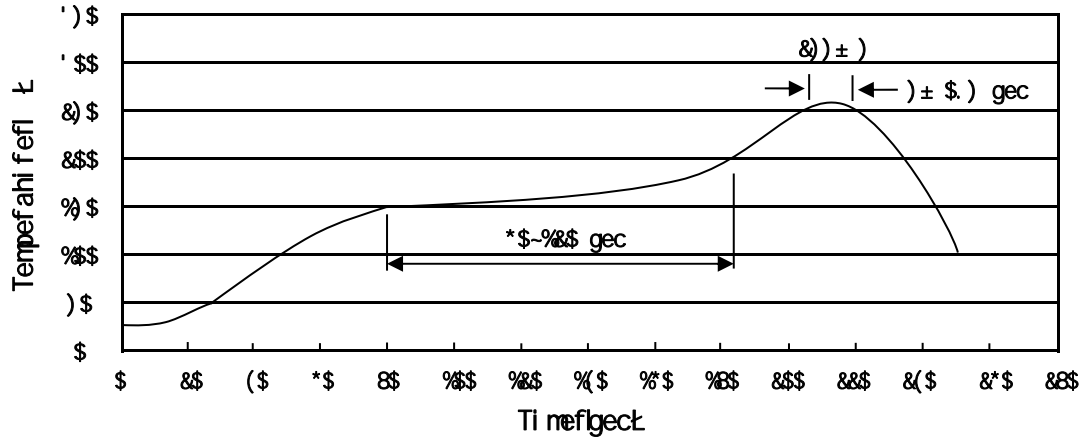

Note:

- 1            150 200                    60 120sec;            1.Preheating:150~200 , Time:60~120sec.
- 2            255±.5                            5..0.5sec;            2.Peak Temp.:255±.5 , Duration:5..0.5sec.
- 3                                    2 10 /sec.                    3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5                            10±1 sec.                            Temp.:260±5                            Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm <sup>3</sup> )		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOP/ESOP-8	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366

/ Notices