

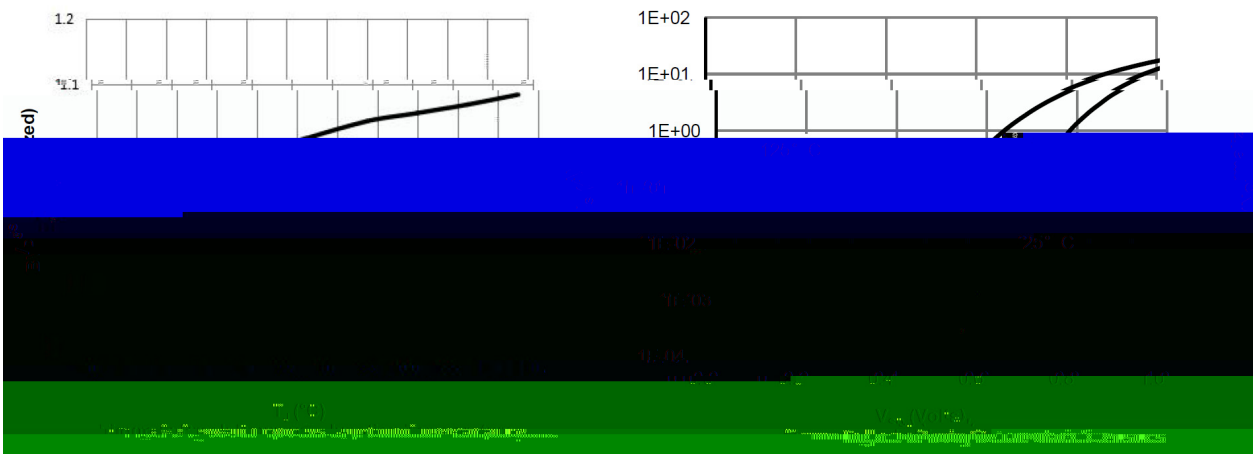


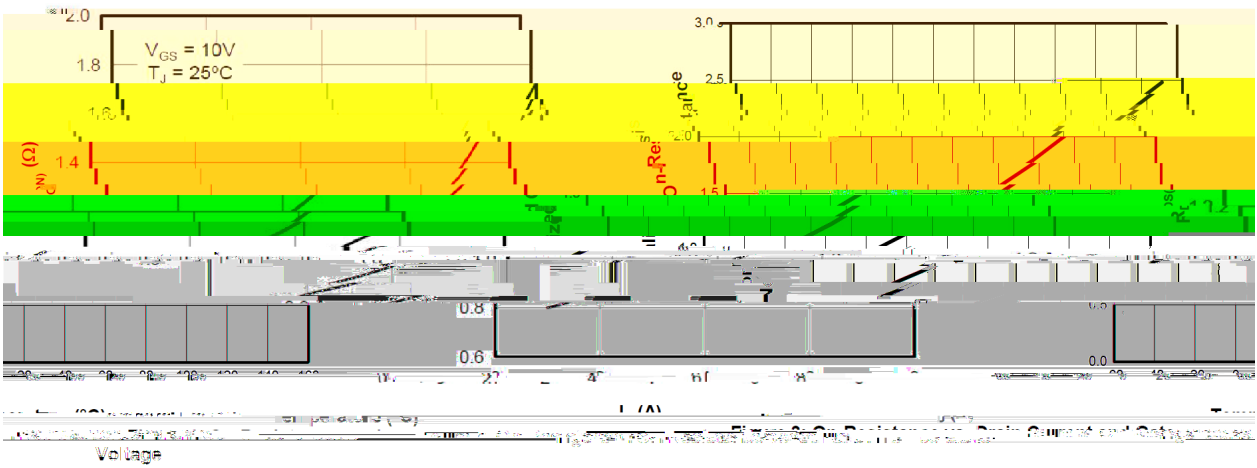




Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{bss}$		

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Continuous Diode Forward Current	$I_S$				4	A
Total Gate Charge	$Q_g$	$V_{DS}=520V$ $I_D=2A$ $V_{GS}=10V$				


/ Electrical Characteristic Curve

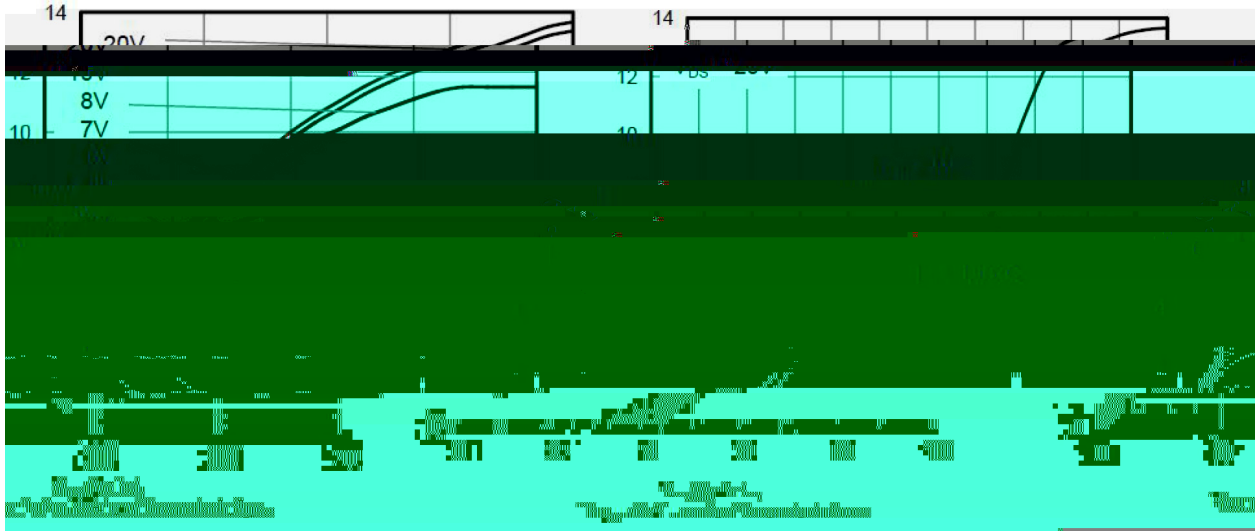

/ Electrical Characteristic Curve

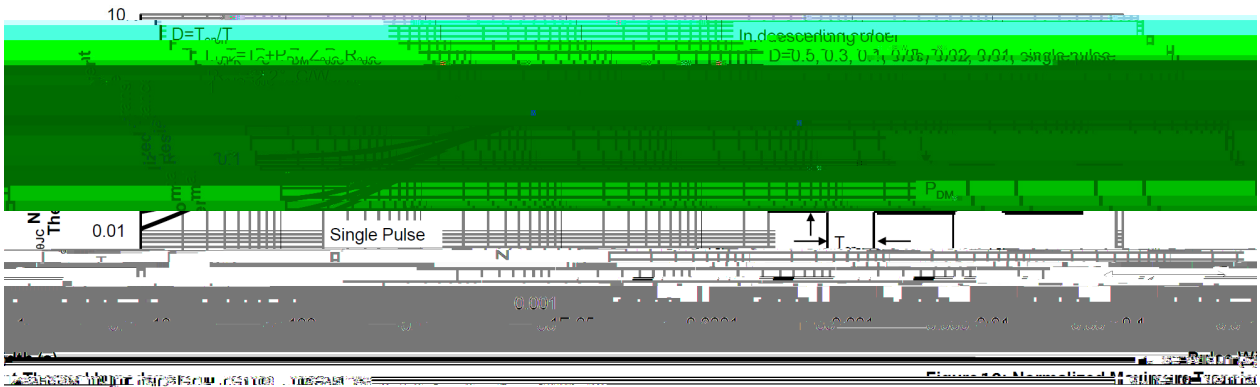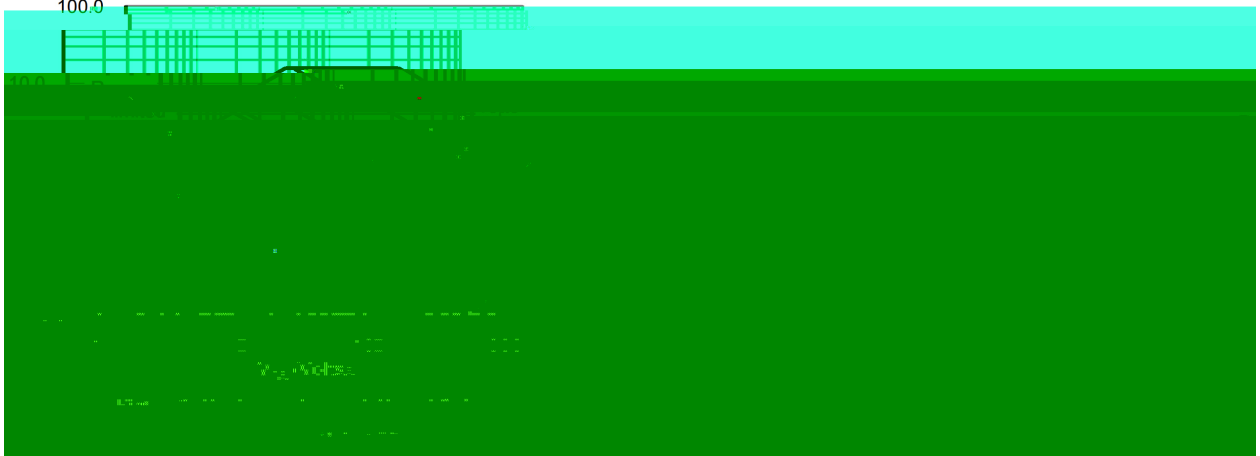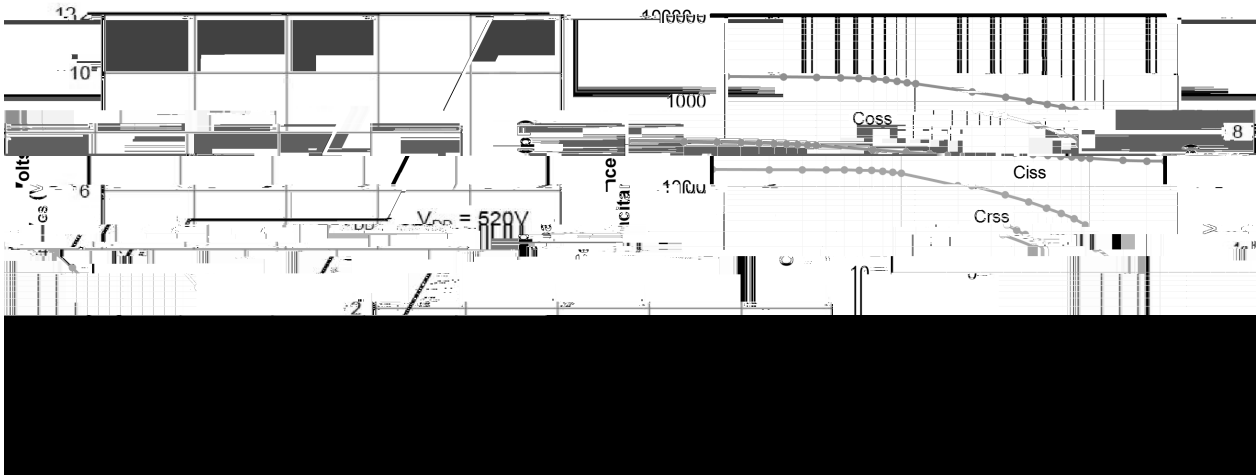

**/ Package Dimensions**

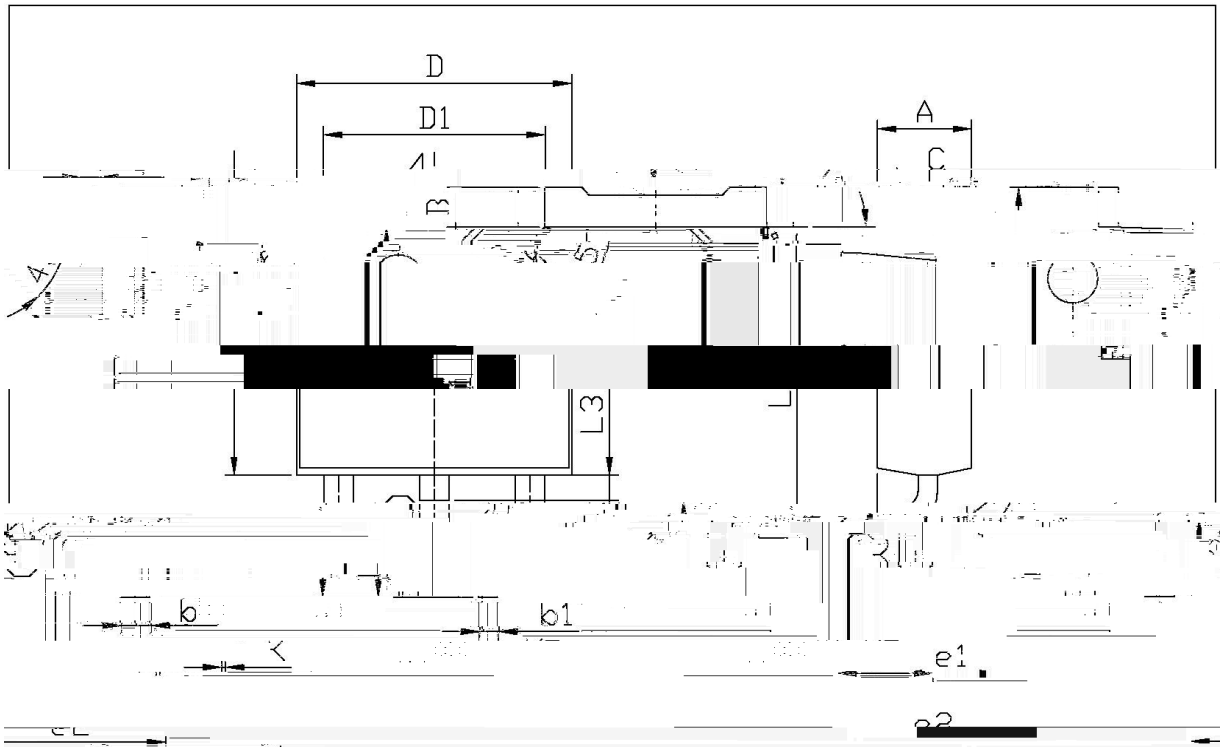


单位: mm

Dimensions	Millimeters	Symbol	Dimensions	In Millimeters	Symbol
Min	Max		Min	Max	
	0.95	B	e1	2.24	
	0.70			4.73	
	0.45			10.35	
	0.45			0.60	
	5.10	b1		0.10	

TO-252

**/ Marking Instructions**

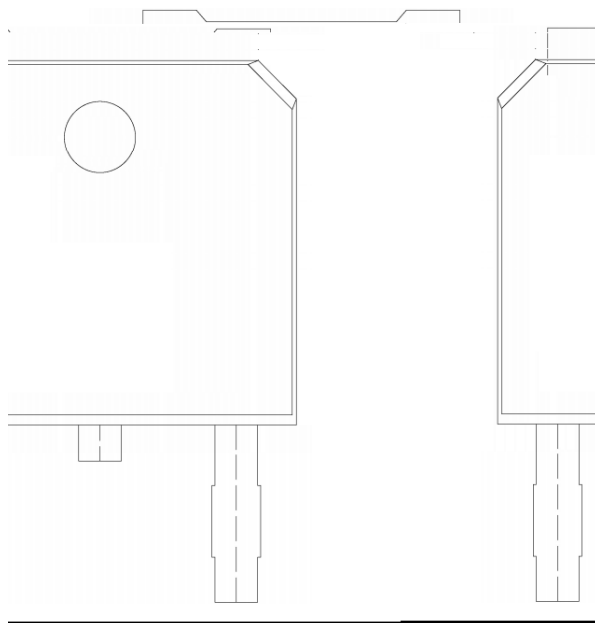

BR

-, I (B)K

!!!!

Note:

BR:           Company Code

65R1K2T:    Product Type Code

