


BRES3V3X1C2ZA



/ Descriptions

DFN0603



ESD

/ Features

- ◆
- ◆

- ◆
- ◆
- ◆
- ◆
- ◆

- ◆
- ◆
- ◆
- ◆
- ◆
- ◆

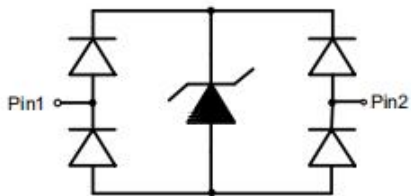


/ h_{FE} Classifications & Marking

BRES3V3X1C2ZA

/ Electrical Characteristic Curve(Ta=25)



/ Electrical Characteristic Curve(Ta=25)

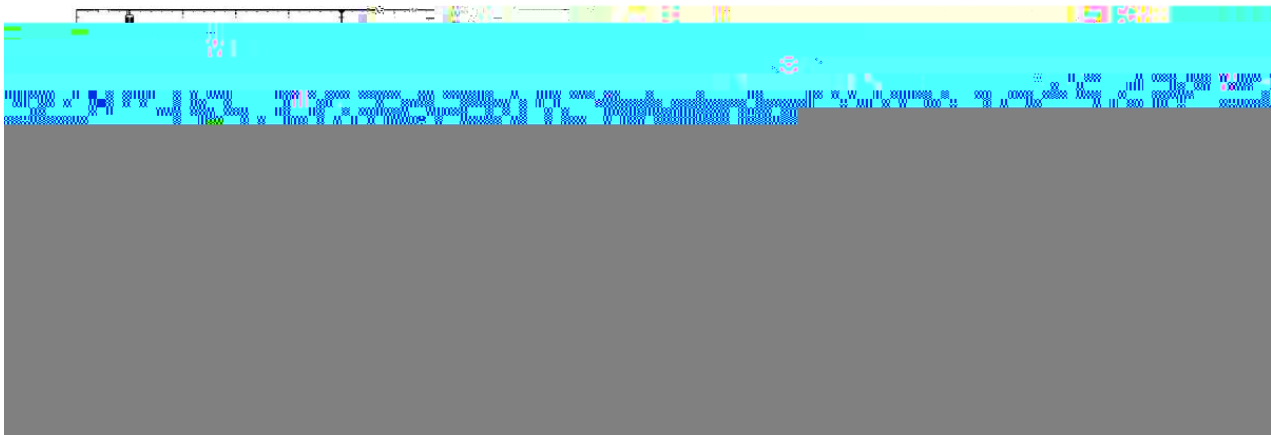

20
16 $Z = 50\Omega$



BRES3V3X1C2ZA

DATA SHEET


/ Marking Instructions

U3

*

U

() /

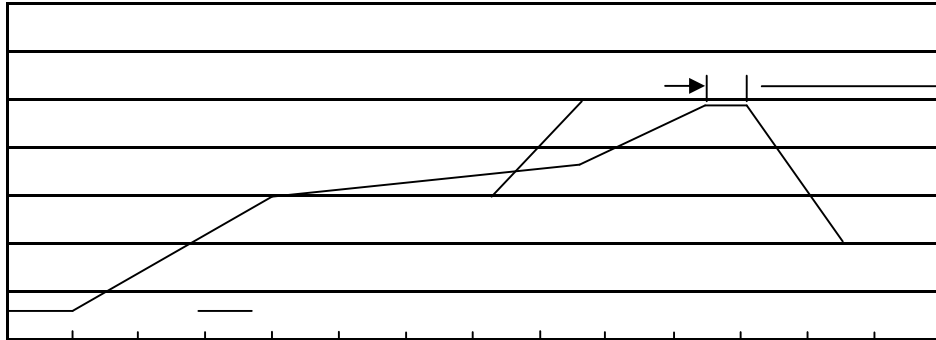

± °C ± °C °C ± °C ± °C

/ Resistance to Soldering Heat Test Conditions

± °C ± °C °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box 盒	Outer Box 箱
DFN0603-2L		10	100,000	6	600,000	7" ×8	180×120×180	390×385×205

/ Notices