



TO-220F N MOS N-CHANNEL MOSFET in a TO-220F Plastic Package.

/ /
 Low gate charge, low crss, fast switching.


GF2GF

These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.



PIN1 G PIN 2 D PIN 3 S

See Marking Instructions.

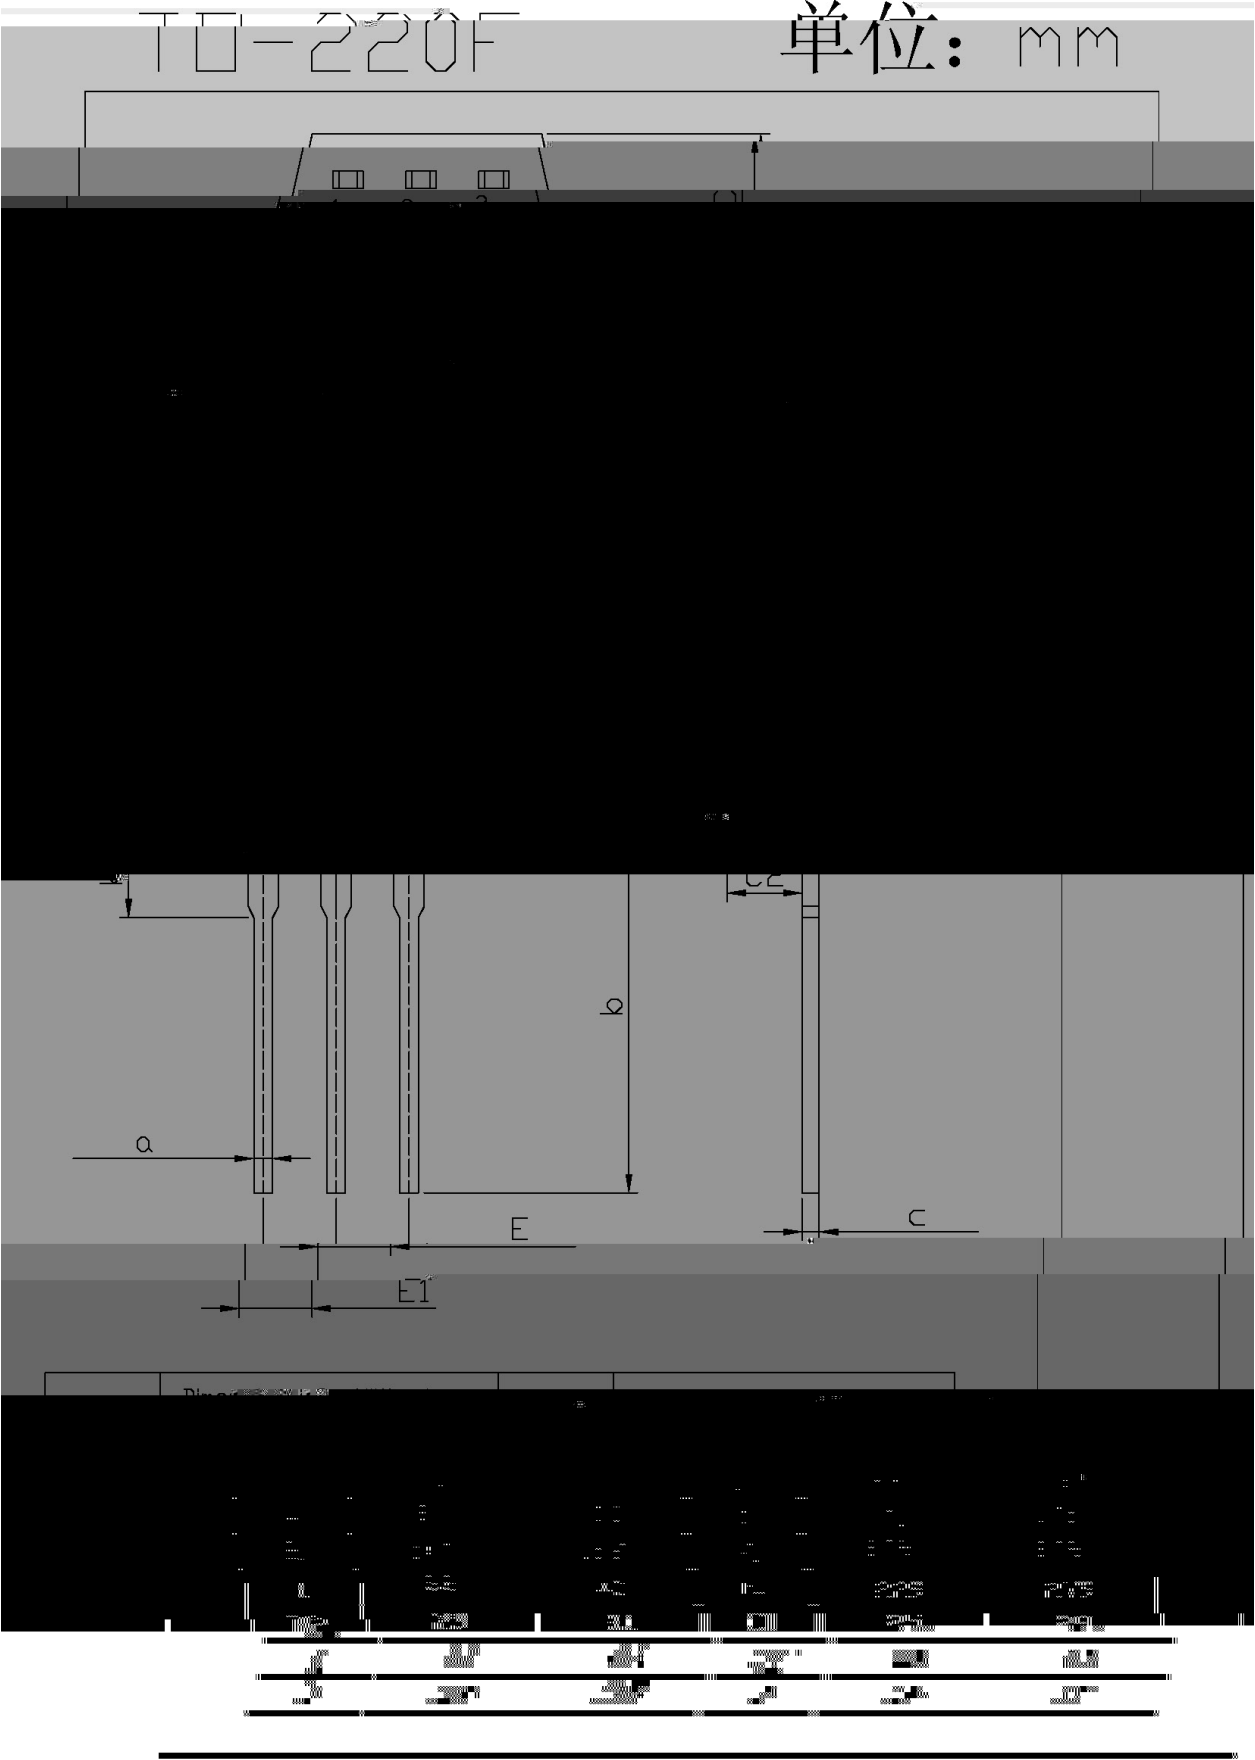



- 1

25 150%

60 90sec;

2

255 ± 5%

5 ± 0.5sec;

3

2 10%/sec.
- Note:
1.Preheating:25~150%, Time:60~90sec.
2.Peak Temp.:255 ± 5%, Duration:5 ± 0.5sec.
3. Cooling Speed: 2~10%/sec.

270 ± 5%

10 ± 1 sec.

Temp.:270±5

Time:10±1 sec

/ BULK

Package Type	Units		Dimension	(unit mm ³)
	Units/Bag	Bags/Inner Box		
	/	/		