

BRLV30T50ABD

Rev. D Apr.-2020



DATA SHEET

B	2348-7				
C	2349-43-25			BR	

TO-263

Schottky Barrier Diode in a TO-263 Plastic Package.

Low forward voltage drop, low power losses, High efficiency operation. HF Product.

DC-DC OR-ing, 1

For use in solar cell junction box as a bypass diode for protection, For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.



PIN 1 1/2 Anode

PIN 2 3/4 4 1/2 Cathode

PIN 3 1/2 Anode

/ h_{FE} Classifications & Marking

See Marv

BRLV30T50ABD


Rev. D Apr.-2020



DATA SHEET

Parameter	Symbol	Rating	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	V

/ Package Dimensions

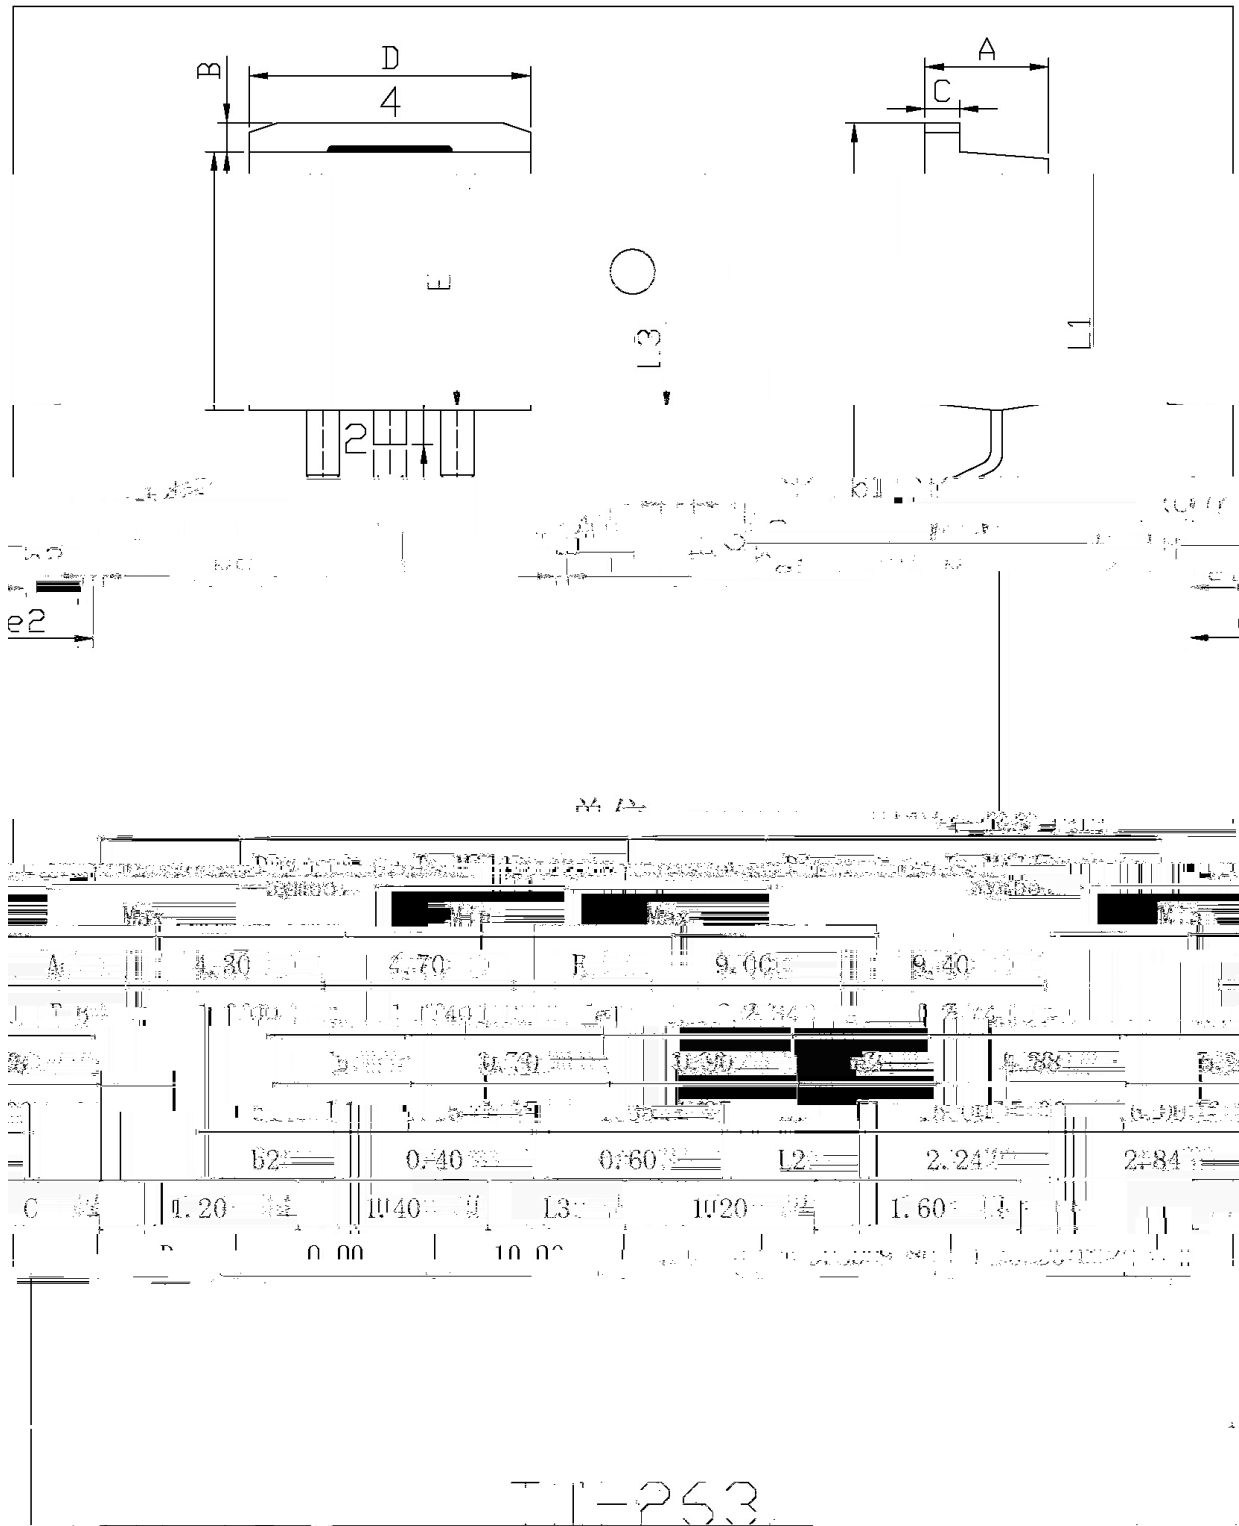

(