

/ Descriptions


TO-252

/ Features

/ Applications

/ Equivalent Circuit

/ Pinning



/ h_{FE} Classifications & Marking






/ Absolute Maximum Ratings(Ta=25)

		×	


/ Electrical Characteristics(Ta=25)

- 1.
- 2.

/ Electrical Characteristic Curve

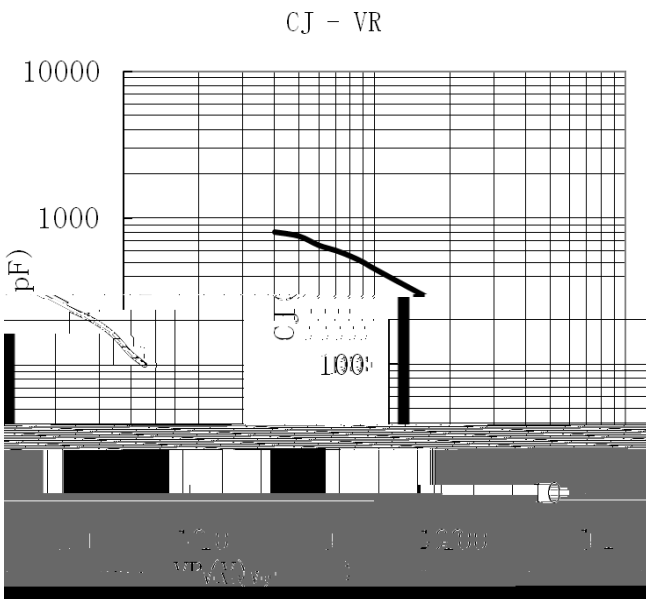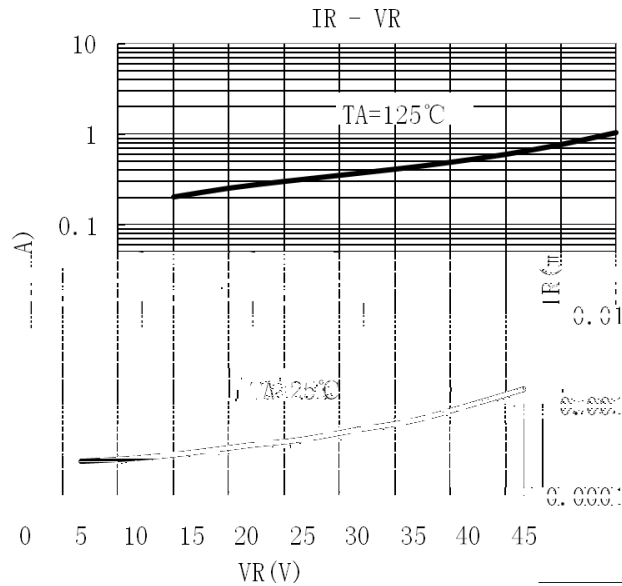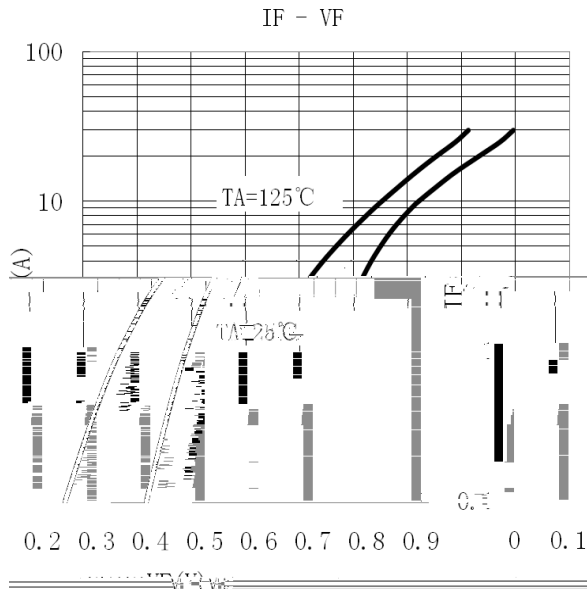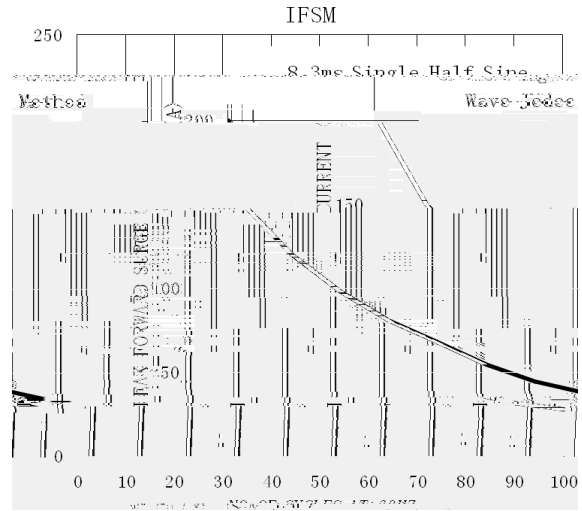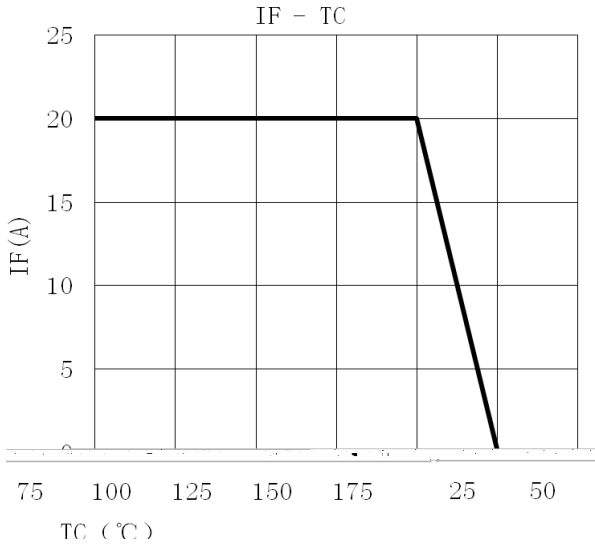


/ Marking Instructions

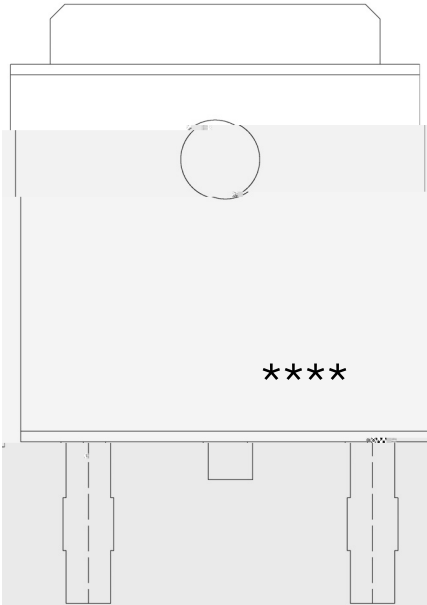

：

() /

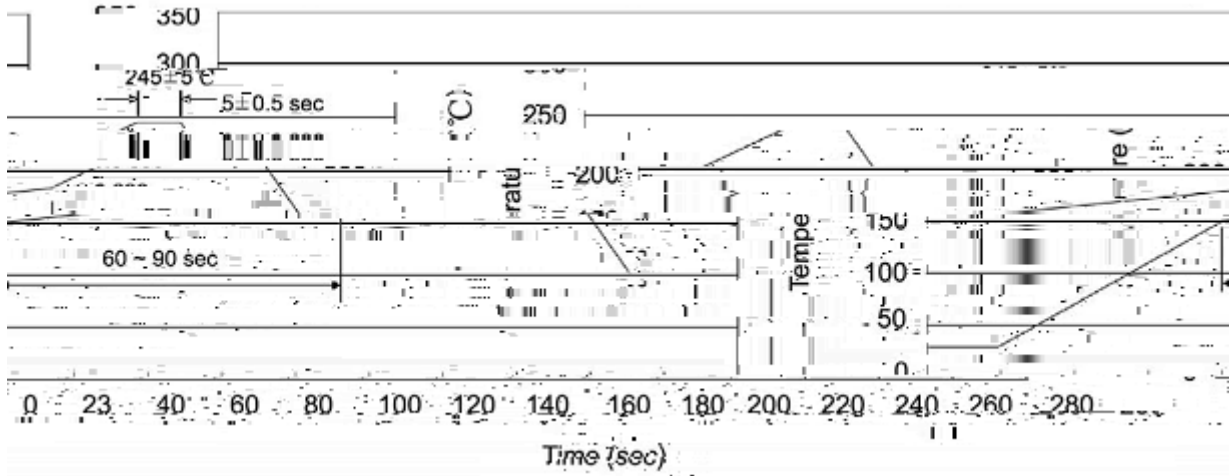

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	5	25,000	13 × 16	360×360×50	385×257×392