






Rev.A May.-2022

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	100	V
Drain Current – Continuous	I_D	170	mA
Drain Current– Pulsed	$I_D(T_C=25^{\circ}C)$	680	mA
Continuous Drain–Source	I_S	170	mA
Gate-Source Voltage	V_{GS}	± 20	V




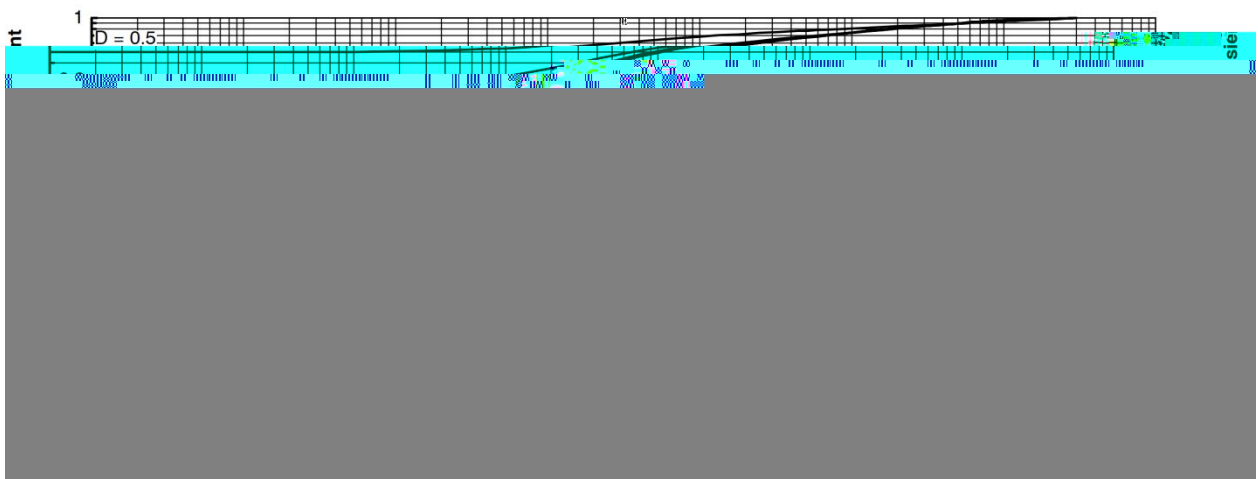




Rev.A May.-2022

PLAN OF THE SHIP

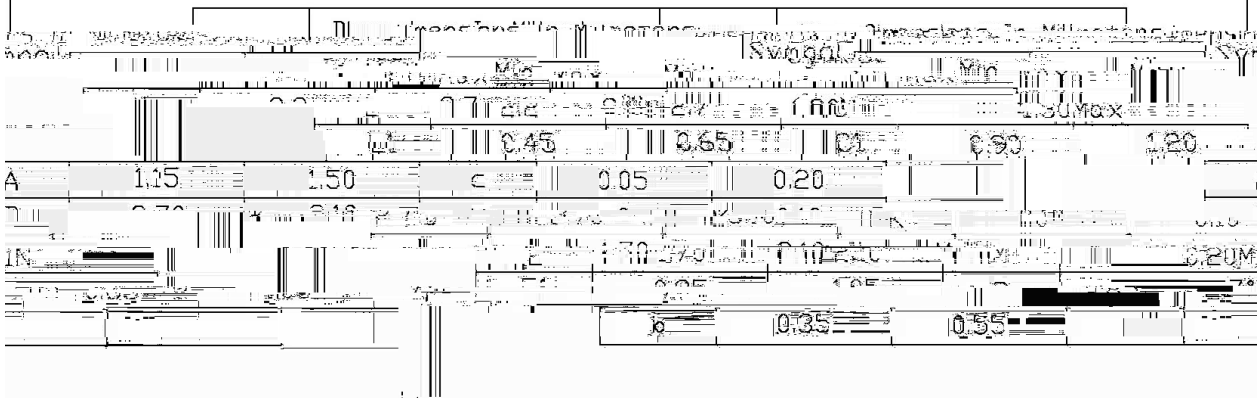



H

SA

Note:

H: Company Code

SA: Product Type



- 1

150 180

60 90sec;
- 2

245±5

5±0.5sec;
- 3

2

10°C/sec.
- Note:

1.Preheating:150~180°C, Time:60~90sec.

2.Peak Temp.:245±5°C, Duration:5±0.5sec.

3. Cooling Speed: 2~10°C/sec.

260±5°C

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL