

50V ~ 600V


3.0A SMB

2011/65/EU

RoHS


c


O



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size.

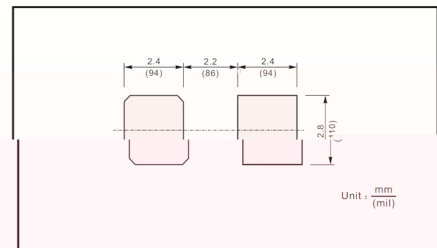





								2
								2

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

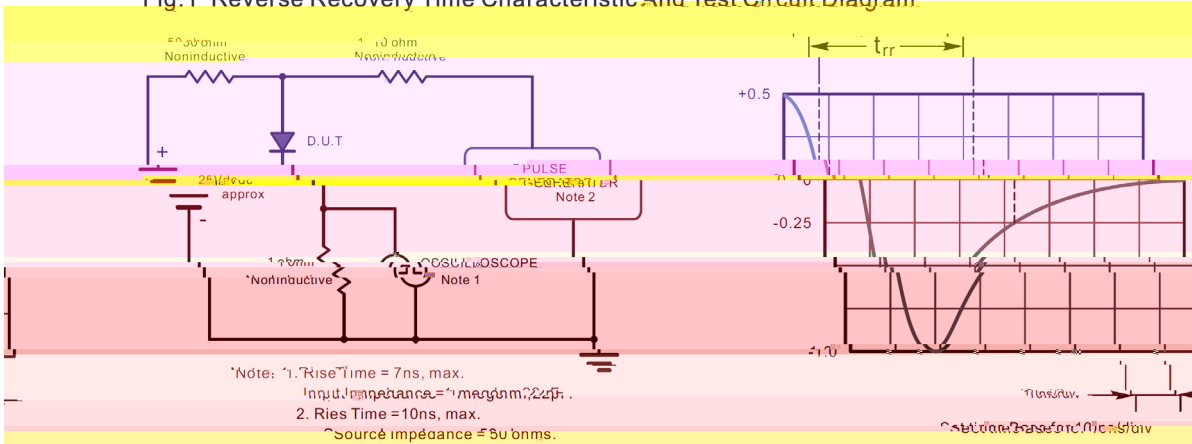


Fig.2 Maximum Average Forward Current Rating





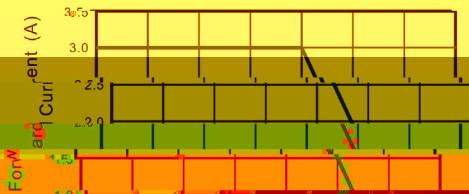


Fig.3 Typical Reverse Characteristic

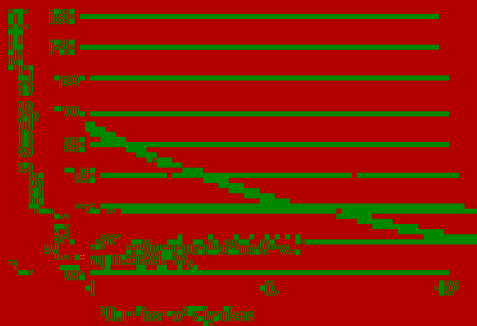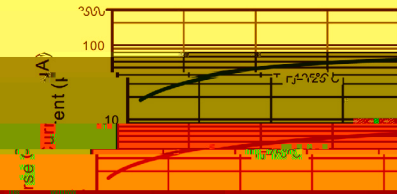

SMB

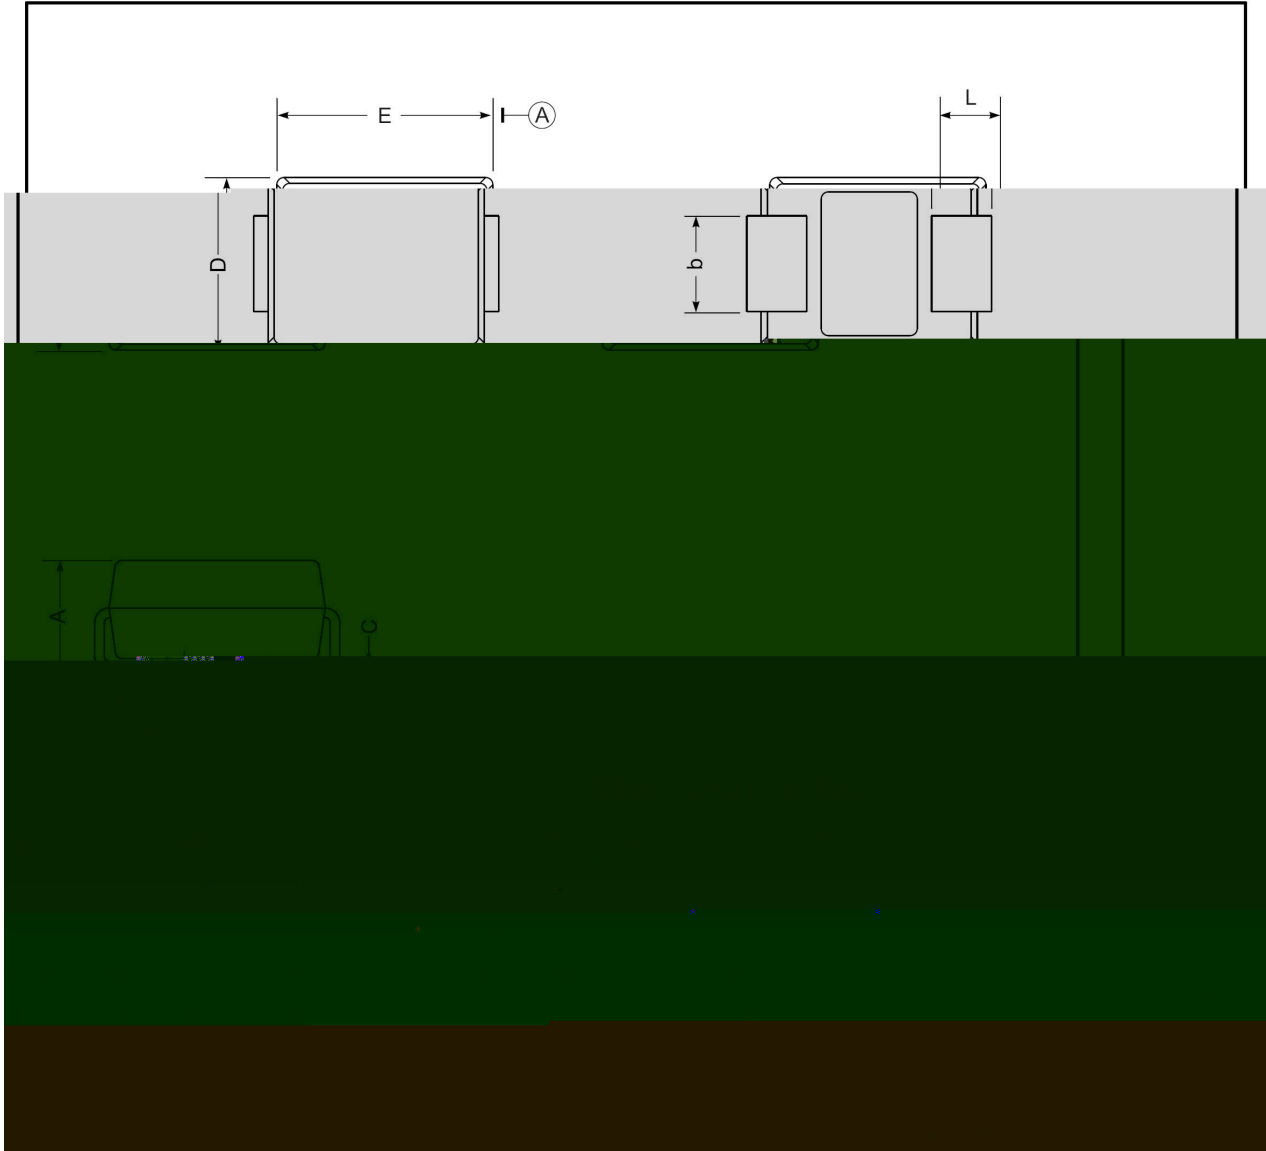

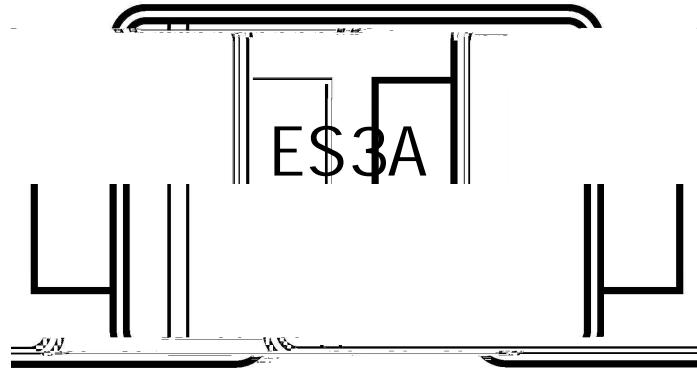

ES3A

1 *

3 *

ES3A

*

*

