





~ž#&%"50" ' 1#

Silicon PNP transistor in a SOT-23 Plastic Package.

+ž.06%ž#

Complementary pair with L8050M.

155- "&.0" ' 1#

Power amplifier applications.

Ł76"!.-ž10, "%&6"0



8"11"14



PIN1 Base PIN 2 Emitter PIN 3 Collector

\*+ŁŁ, -.##"/&.0" ' 1# 2, ~. %3"14

h<sub>FE</sub>





Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	-30	V
Collector to Emitter Voltage	$V_{CEO}$	-20	V
Emitter to Base Voltage	$V_{EBO}$	-6.0	V
Collector Current - Continuous	$I_C$	-1.5	A
Base Current - Continuous	$I_B$	-0.5	A
Collector Po/	Dissi	o	n

2.0mA





8. & 3. 4 ž. ~" = ž 1 # " ' 1 #.

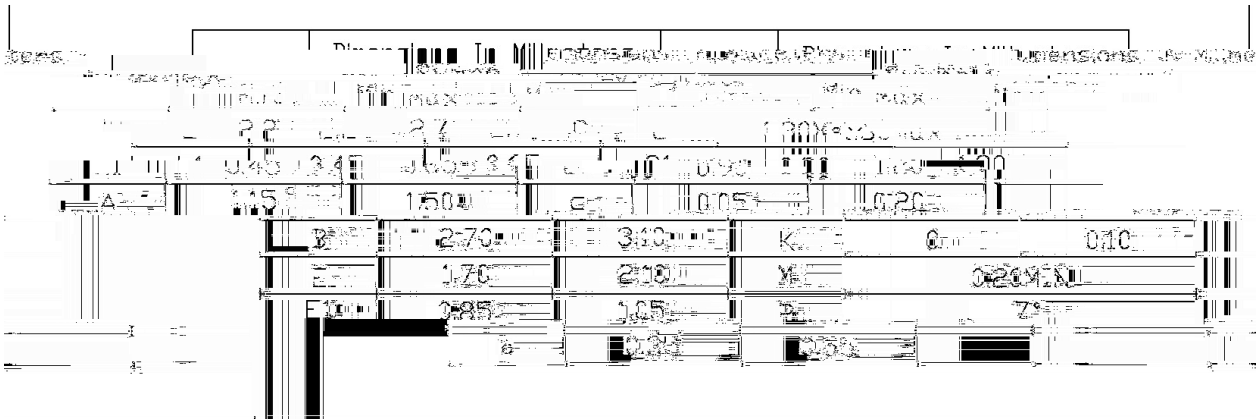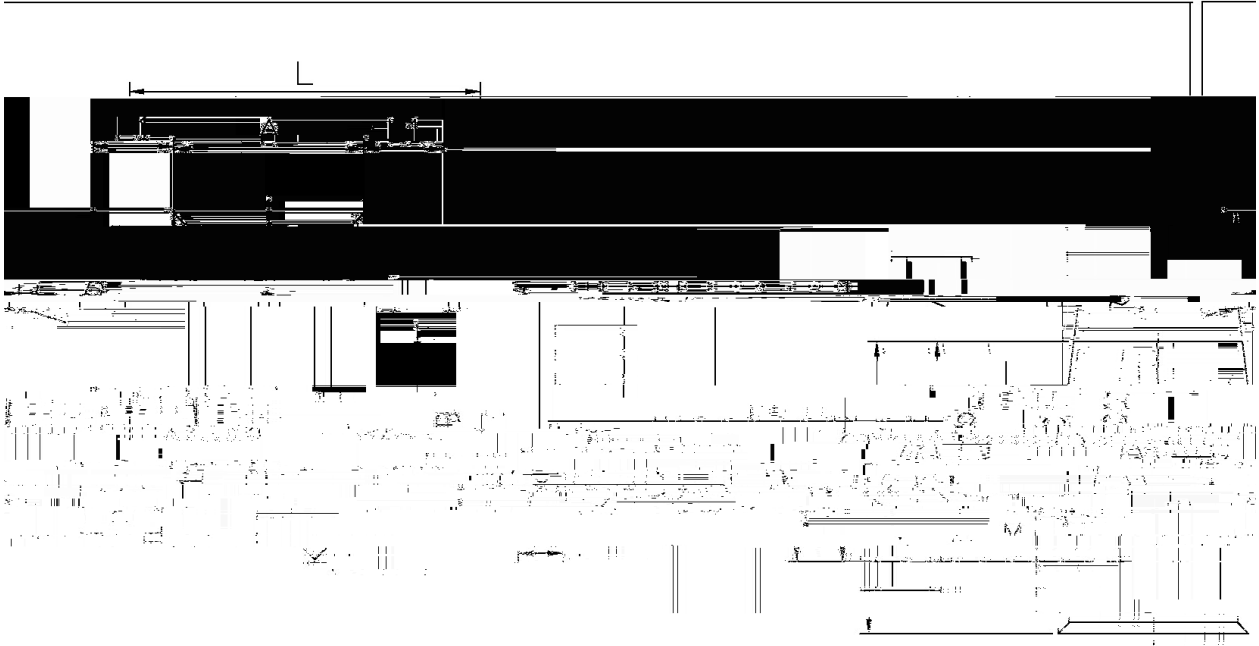

3"14B1#0%6&0"1#



> 温度曲线 Temperature Profile for IR Reflow Soldering(Pb-Free)


说明：

- 1、预热温度 150 ~ 180 ，时间 60 ~ 90sec;
- 2、峰值温度 245±5 ，时间持续为 5±0.5sec;

Note:

- 1.Preheating:150~180°C, Time:60~90sec.
- 2.Peak Temp.:245