

/ Descriptions

TO-252



Schottky Diode in a TO-252 Plastic Package.

/ Features

High Forward Surge Capability, Ultra Low Forward Voltage Drop, Excellent High Temperature Stability.

/ Applications

For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.

/ Equivalent Circuit**/ Pinning**

PIN1 Anode

PIN 2,4 Cathode

PIN 3 Anode

/ h_{FE} Classifications & Marking






See Marking Instructions.




Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RM} V_{RSM} V_{DC}	100	V
RMS Reverse Voltage	V_{RM}	70	V
Average forward rectified current	$I_{F(AV)}$	1×10	A
Non Repetitive Peak Surge Current	I_{FSM}	200	A
Thermal Resistance Junction to Case	R_{JC}	2.0	/W
Junction and Storage Temperature Range	T_j T_{stg}	-55 +150	

Parameter


/ Electrical Characteristic Curve

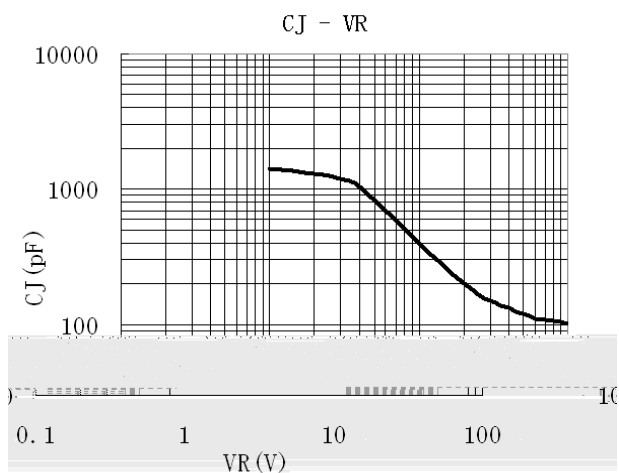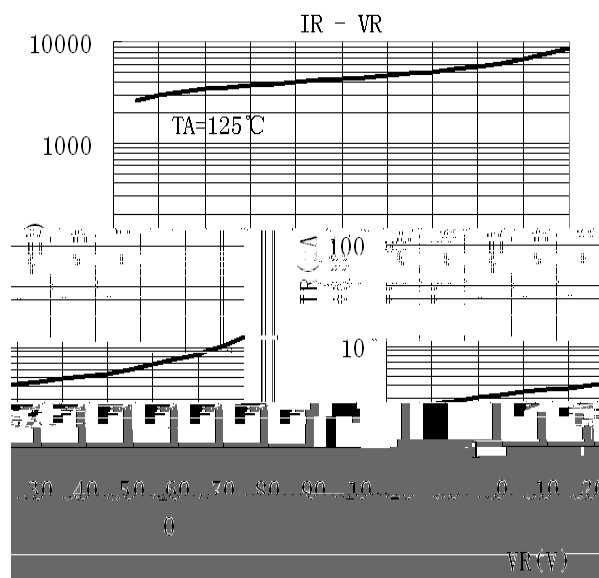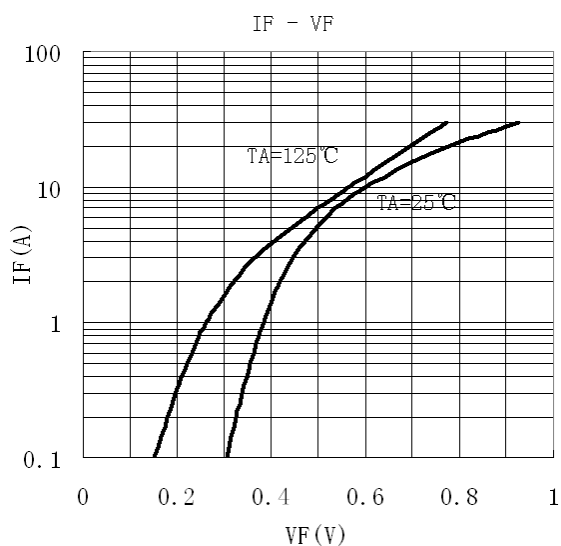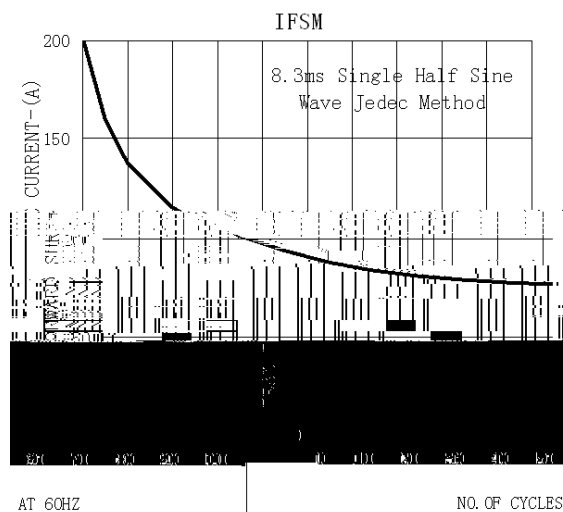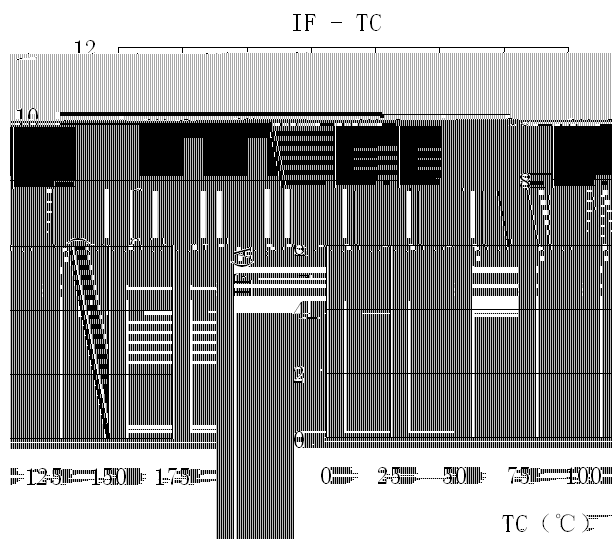

/ Package Dimensions

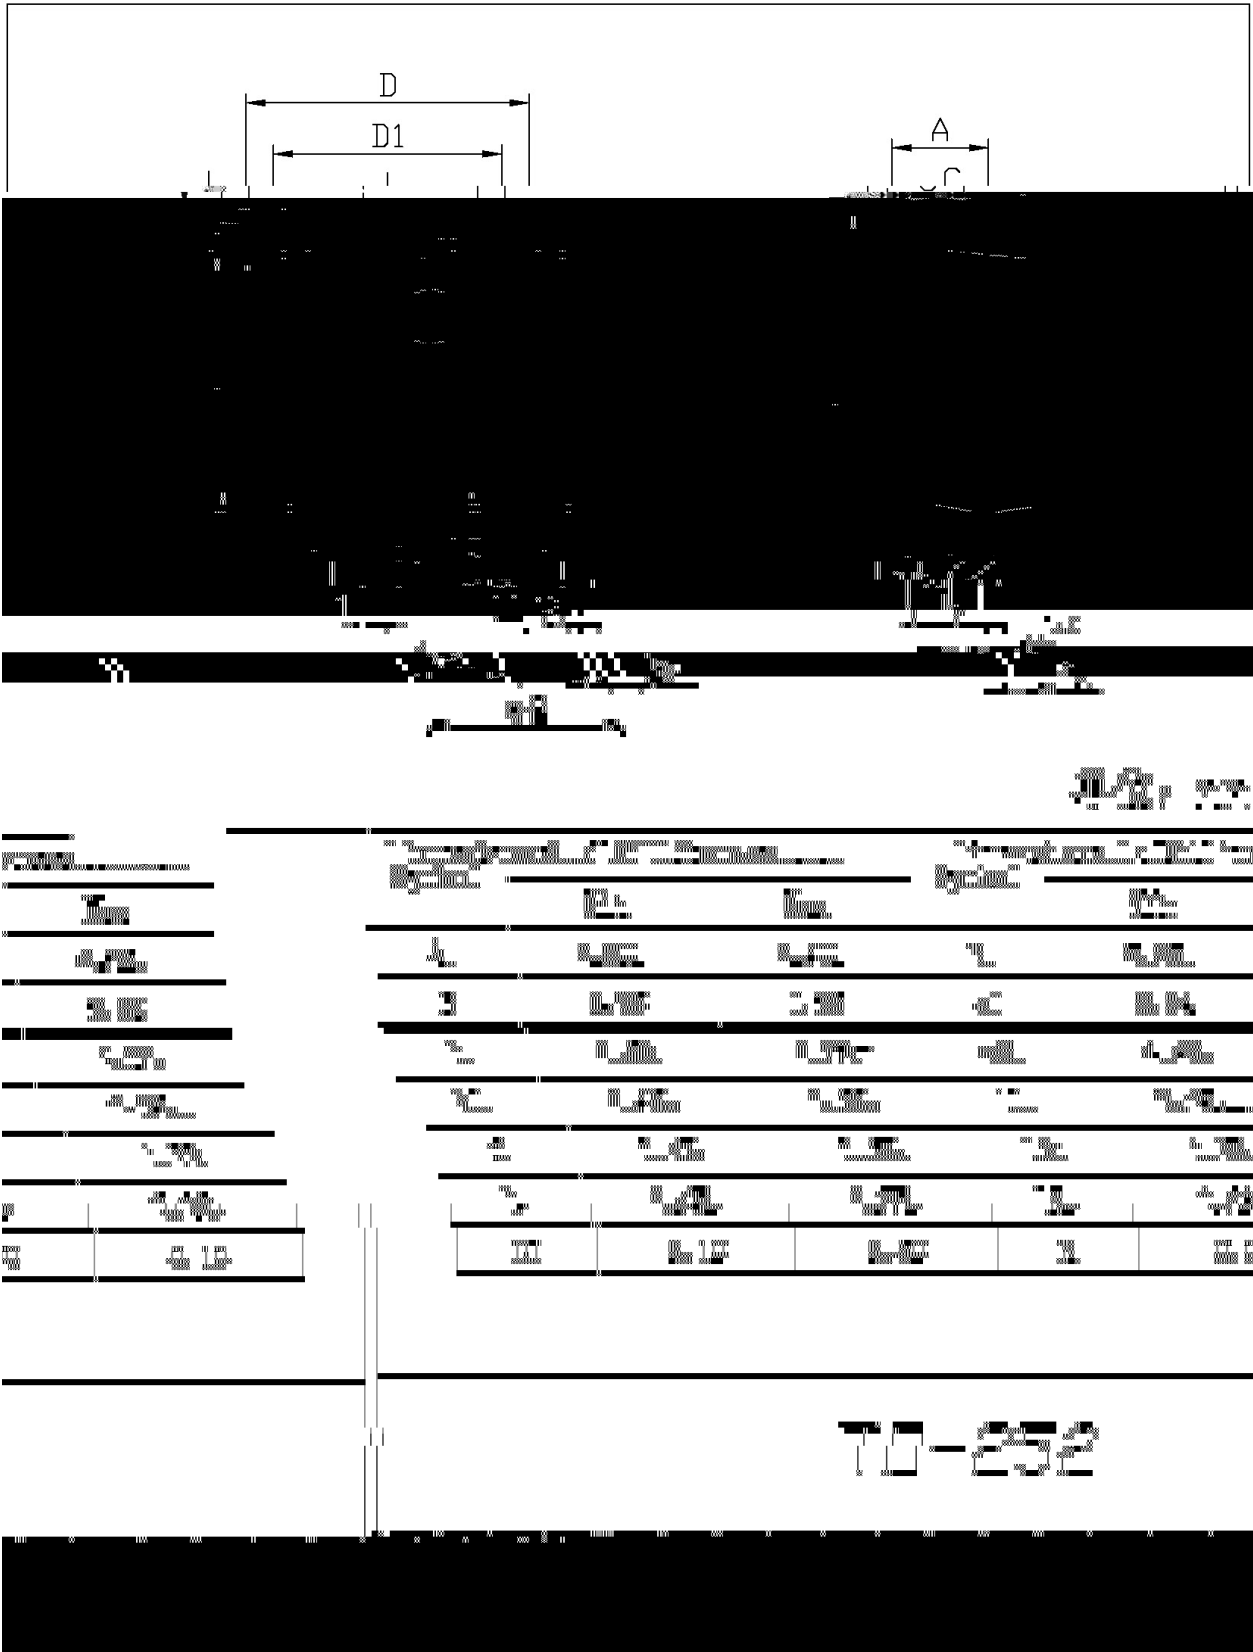

/ Marking Instructions

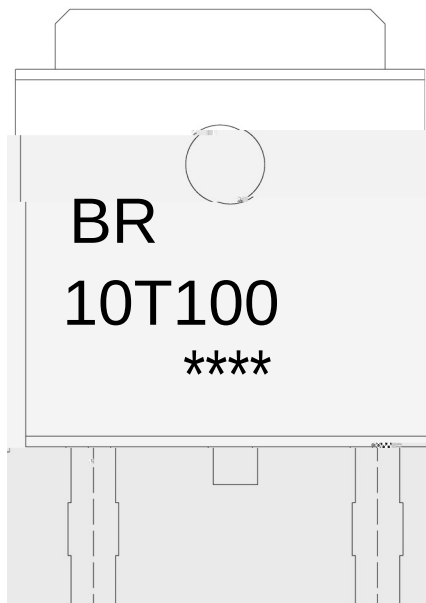

BR

10T100

Note:

BR:

Company Code


10T100

Product Type Code.

****:

Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

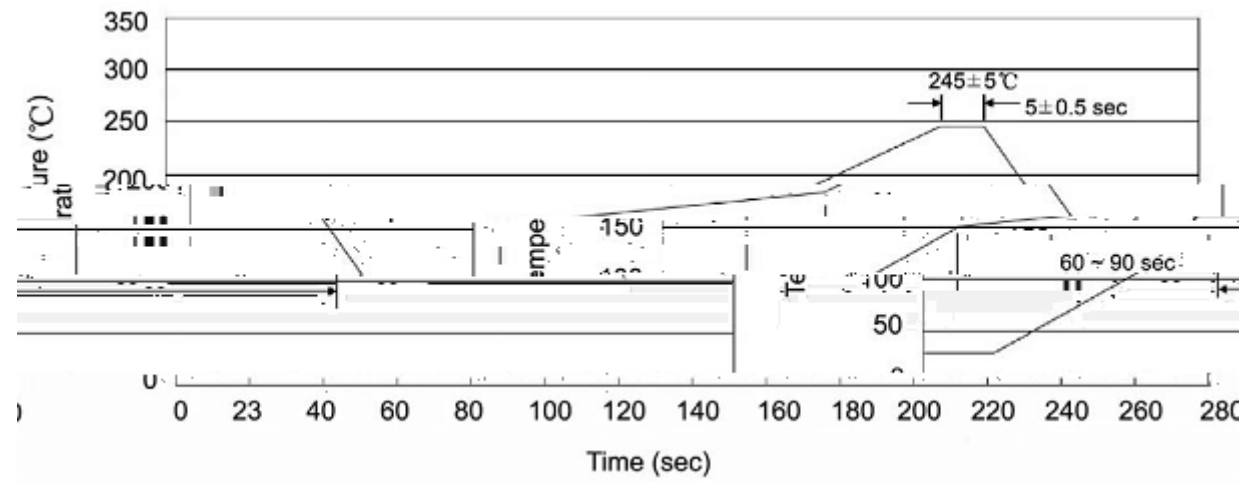

Note:

- | | | | | | |
|---|-------|-----|----|-----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. |