




TO-252

Schottky Diode in a TO-252 Plastic Package.

Low forward voltage drop, low power losses, High efficiency operation. HF product.

OR-ing DC-DC

For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.



PIN1 Anode      PIN 2 4 Cathode      PIN 3 Anode


See Marking Instructions.





100



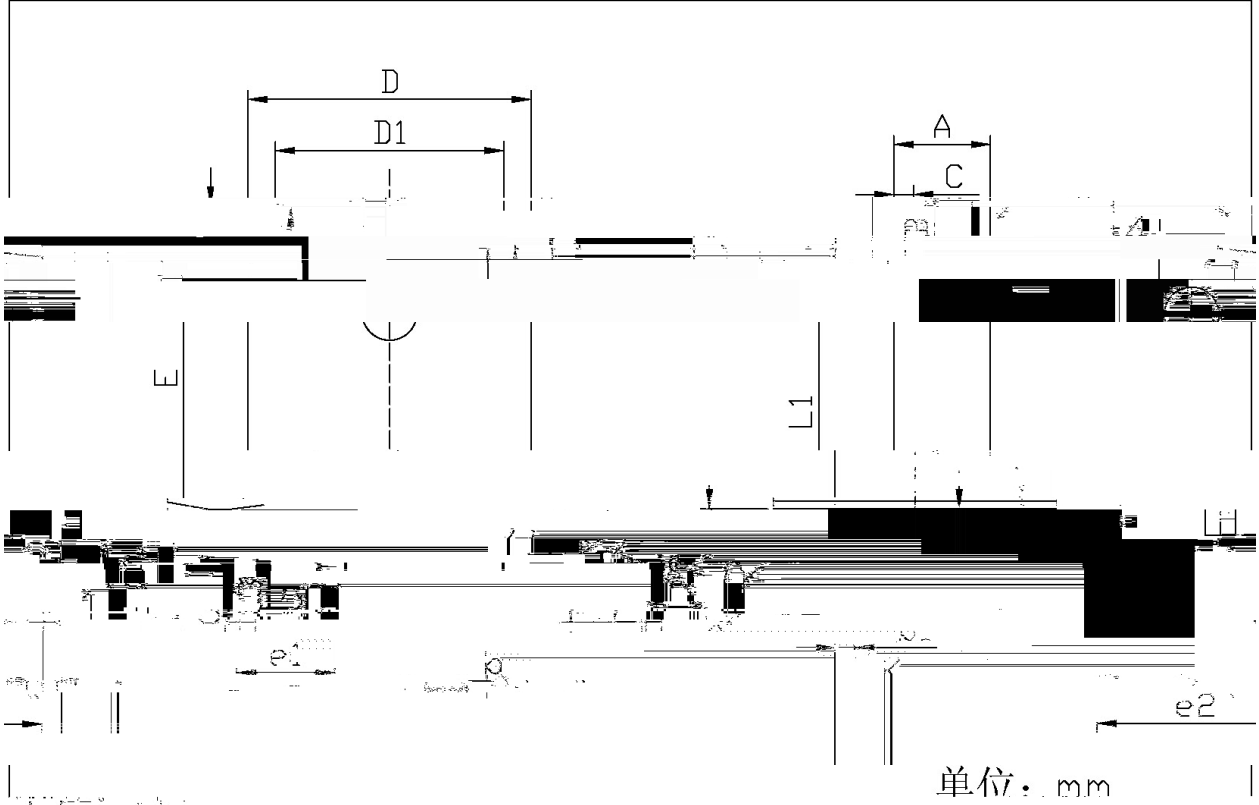

Symbol	Max	Symbol	Max	Symbol	Max
0.45	0.55	0.25	0.25	0.45	0.45
0.45	0.55	0.25	0.25	0.45	0.45
0.45	0.55	0.25	0.25	0.45	0.45





r