

Rev.F May.-2016

WR0596


Schottky Diode in a TO-263 Plastic Package.

Low forward voltage drop, low power losses, High efficiency operation.

RU01q j

GF0GF

For use in high frequency inverters, switching power supplies, freewheeling diodes, OR-ing diode, dc-to-dc converters and reverse battery protection.









PIN1 Anode

PIN 2 4 Cathode


PIN 3 Anode

See Marking Instructions.

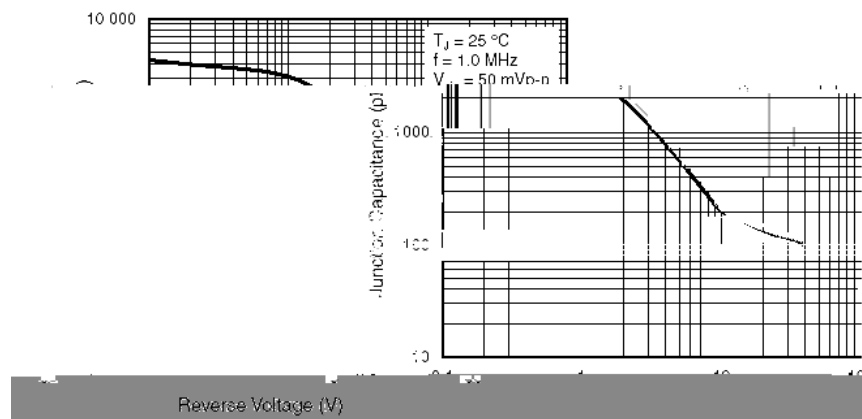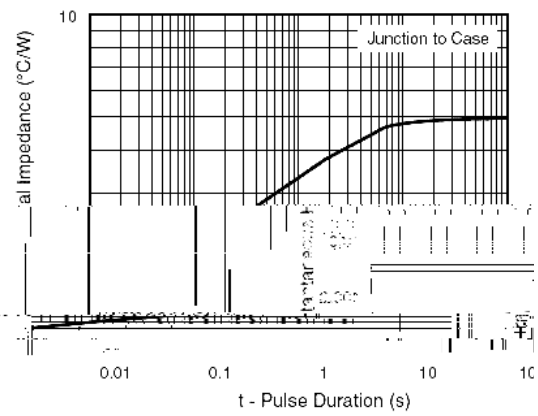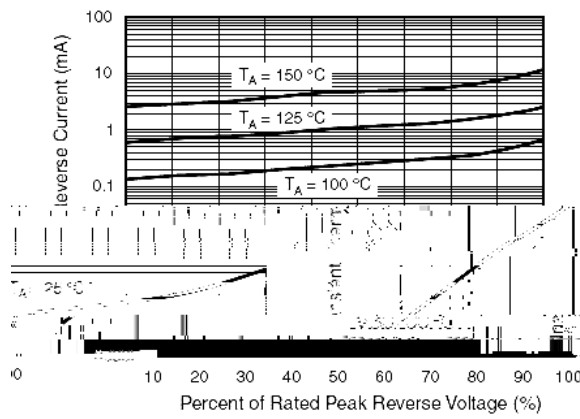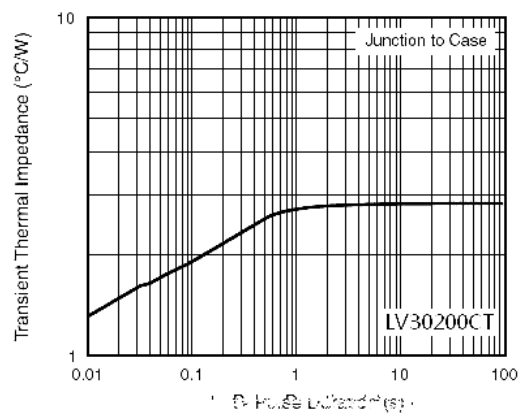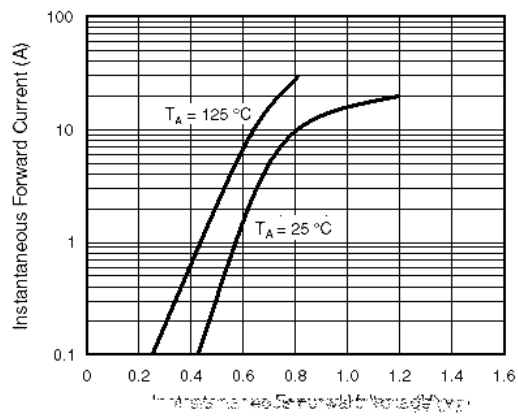

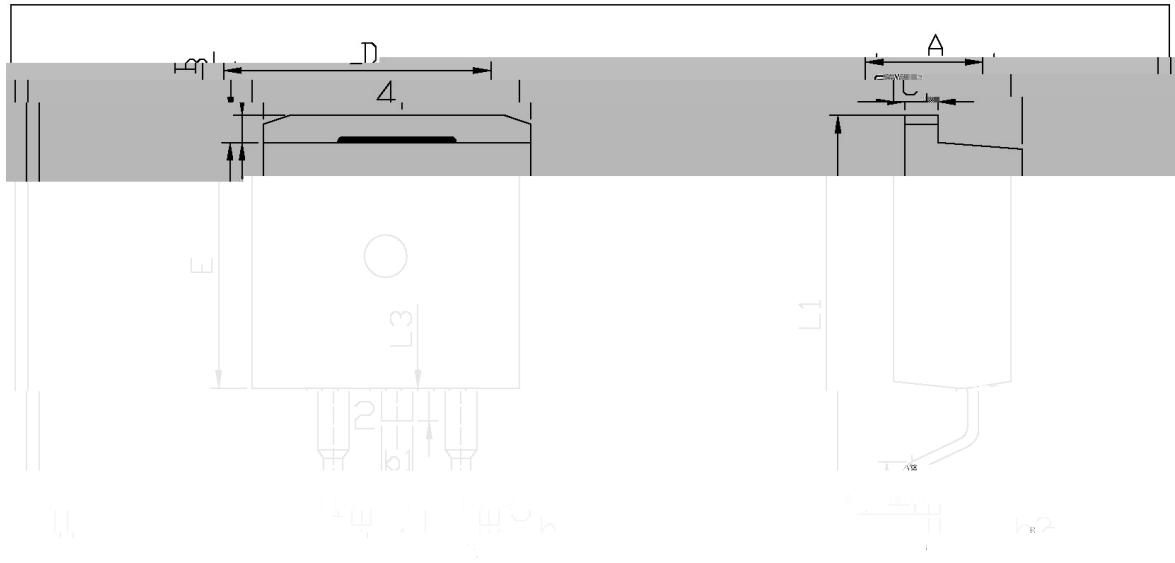

Max		Min		Max		Min	
9.40		4.30		4.70		9.00	
2.74		E		E		2.34	
82.88		82.88		82.88		82.88	
15.00		16.00		b1		L1	
				1.15		1.35	

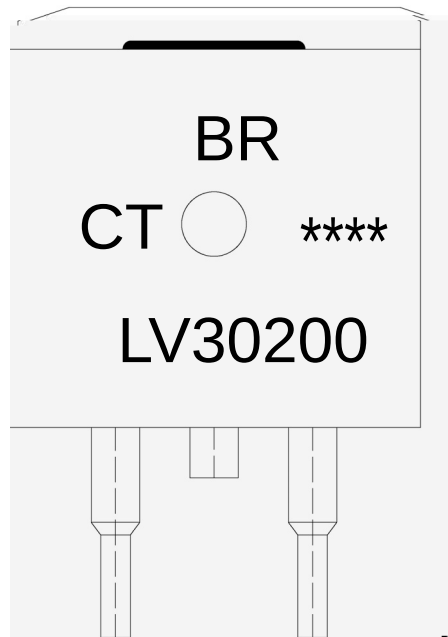

BR

0Y63533

FW:

Note:

BR:

0Y63533

FW:

****:

Company Code

Product Type.

Internal Structure

Lot No. Code, code change with Lot No.

