

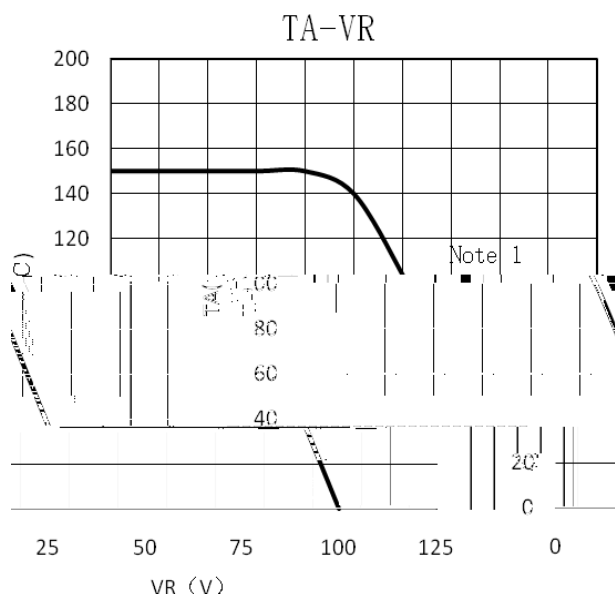
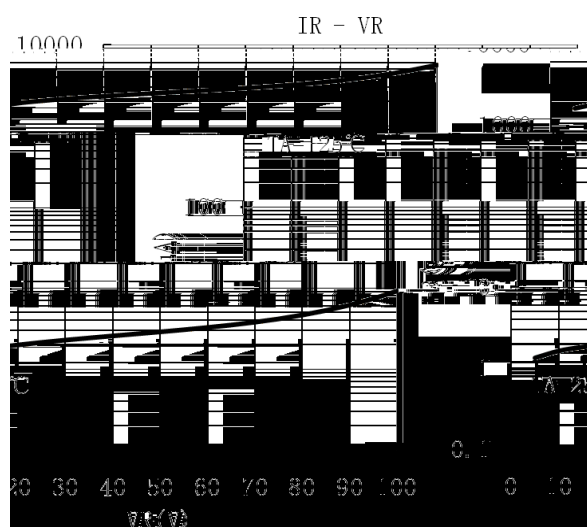
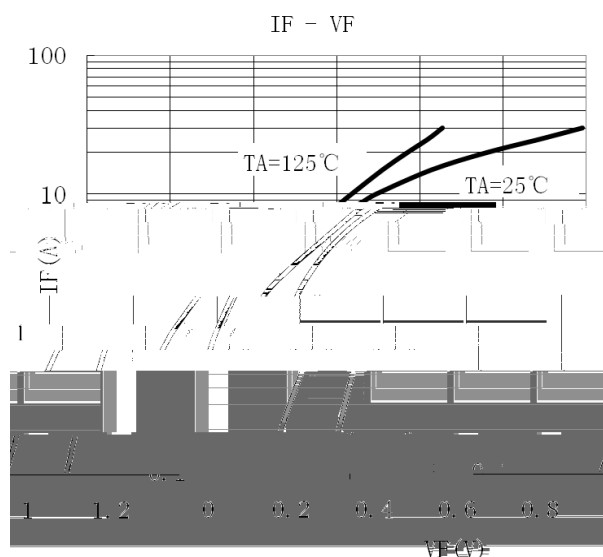


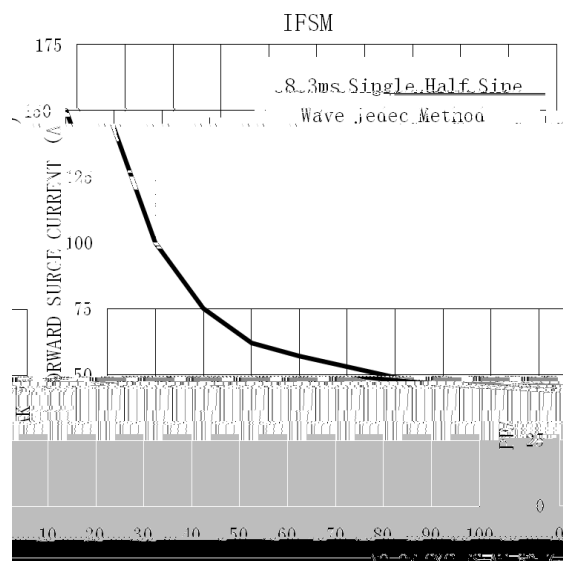


| Parameter                       | Symbol | Rating | Unit |
|---------------------------------|--------|--------|------|
| Peak Repetitive Reverse Voltage |        |        |      |
| Working Peak Reverse Voltage    |        |        |      |
| DC Blocking Voltage             |        |        |      |

**/ Electrical Characteristic Curve**

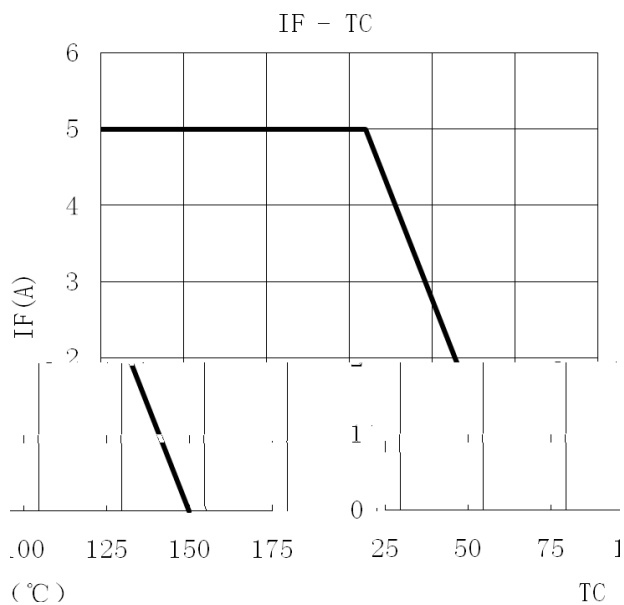


**/ Package Dimensions**

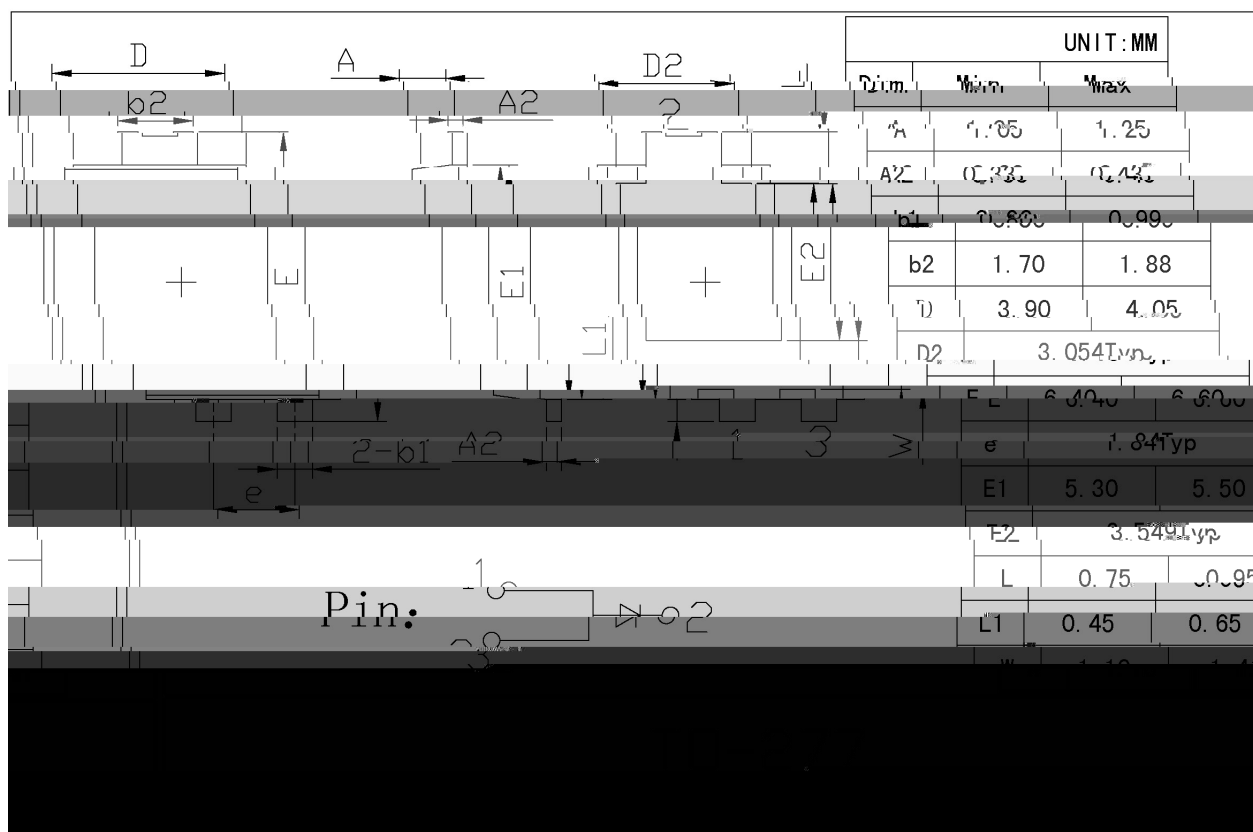



( ) / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

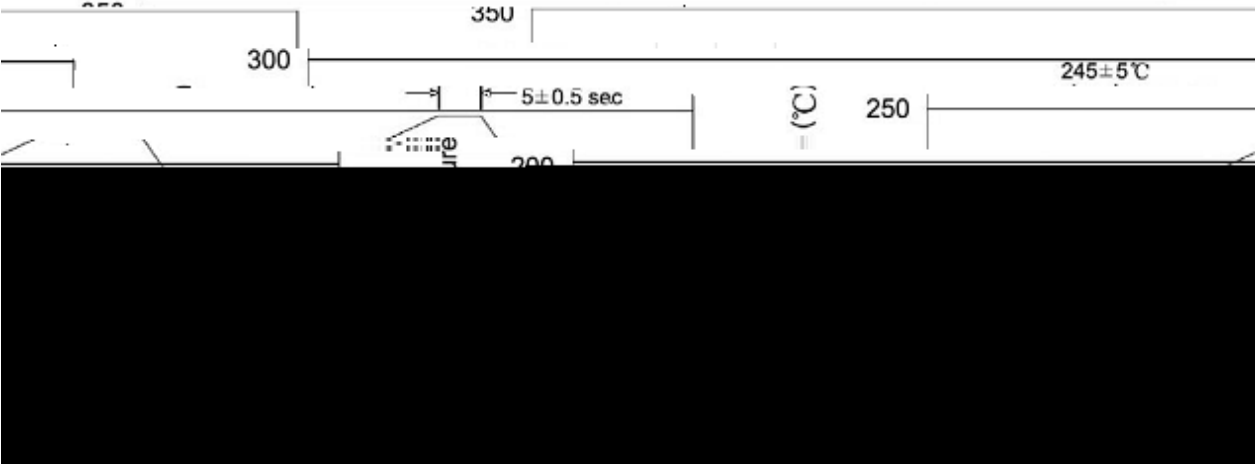

Note:

- |   |       |     |           |                                         |                                      |
|---|-------|-----|-----------|-----------------------------------------|--------------------------------------|
| 1 | 25    | 150 | 60        | 90sec;                                  | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 |     | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |                                      |
| 3 |       | 2   | 10        | /sec.                                   | 3. Cooling Speed: 2~10 /sec.         |

/ Resistance to Soldering Heat Test Conditions

260±5                      10±1 sec.                      Temp.:260±5                      Time:10±1 sec

/ Packaging SPEC.

/ REEL

| Package Type | Units      |                 | Dimension | (unit mm <sup>3</sup> ) |
|--------------|------------|-----------------|-----------|-------------------------|
|              | Units/Reel | Reels/Inner Box |           |                         |
|              | /          | /               |           |                         |