

MBRB20100CT


Rev.H Feb.-2023

KF \$) - *

Schottky Diode in a TO-263 Plastic Package.

Low power loss, high efficiency, HF product.

For use in low voltage,high frequency inverters, free wheeling, and polarity protection applications.

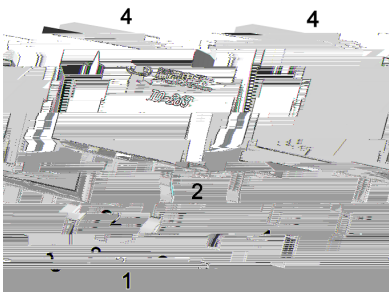

PIN1 Anode

PIN 2 4 Cathode

PIN 3 Anode

/ Marking




See Marking Instructions.

MBRB20100CT

Rev.H Feb.-2023

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	100	V
Working Peak Reverse Voltage	V_{RWM}	100	V
Peak Repetitive Forward Current	I_{FRM}		

/ Electrical Characteristic Curve

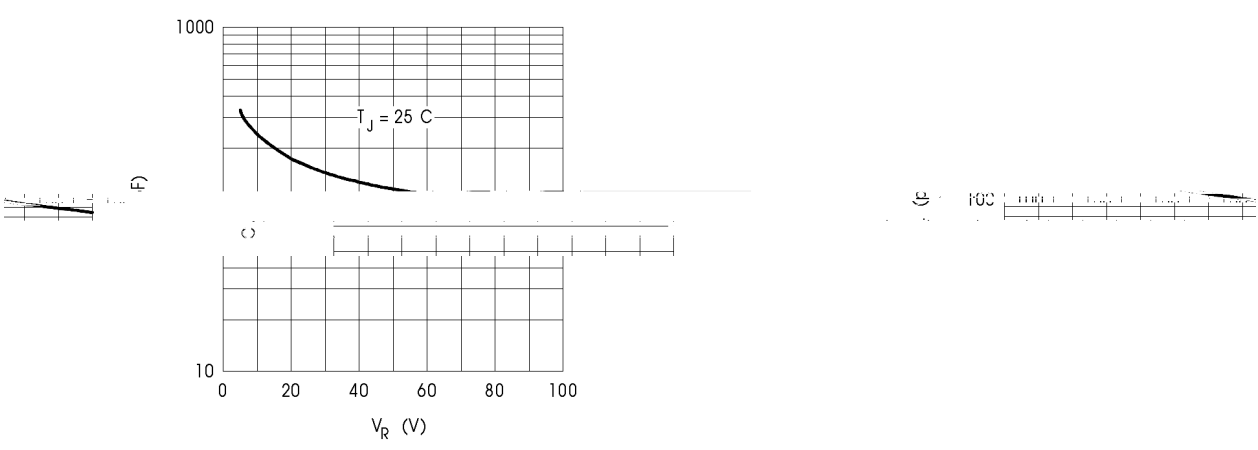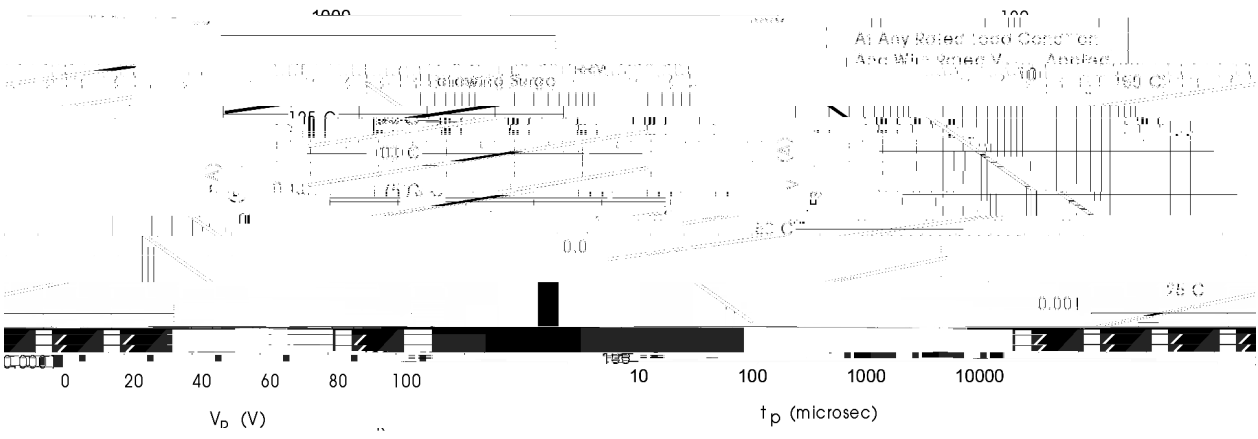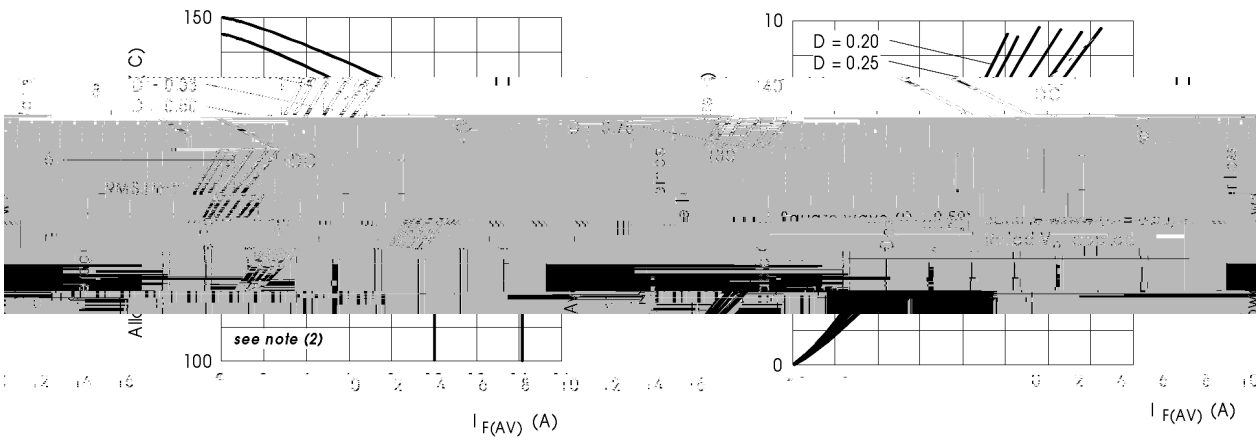

MBRB20100CT

Rev.H Feb.-2023

