


/ Descriptions

SOT-323 NPN


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning



/ Marking


/ Electrical Characteristic Curve

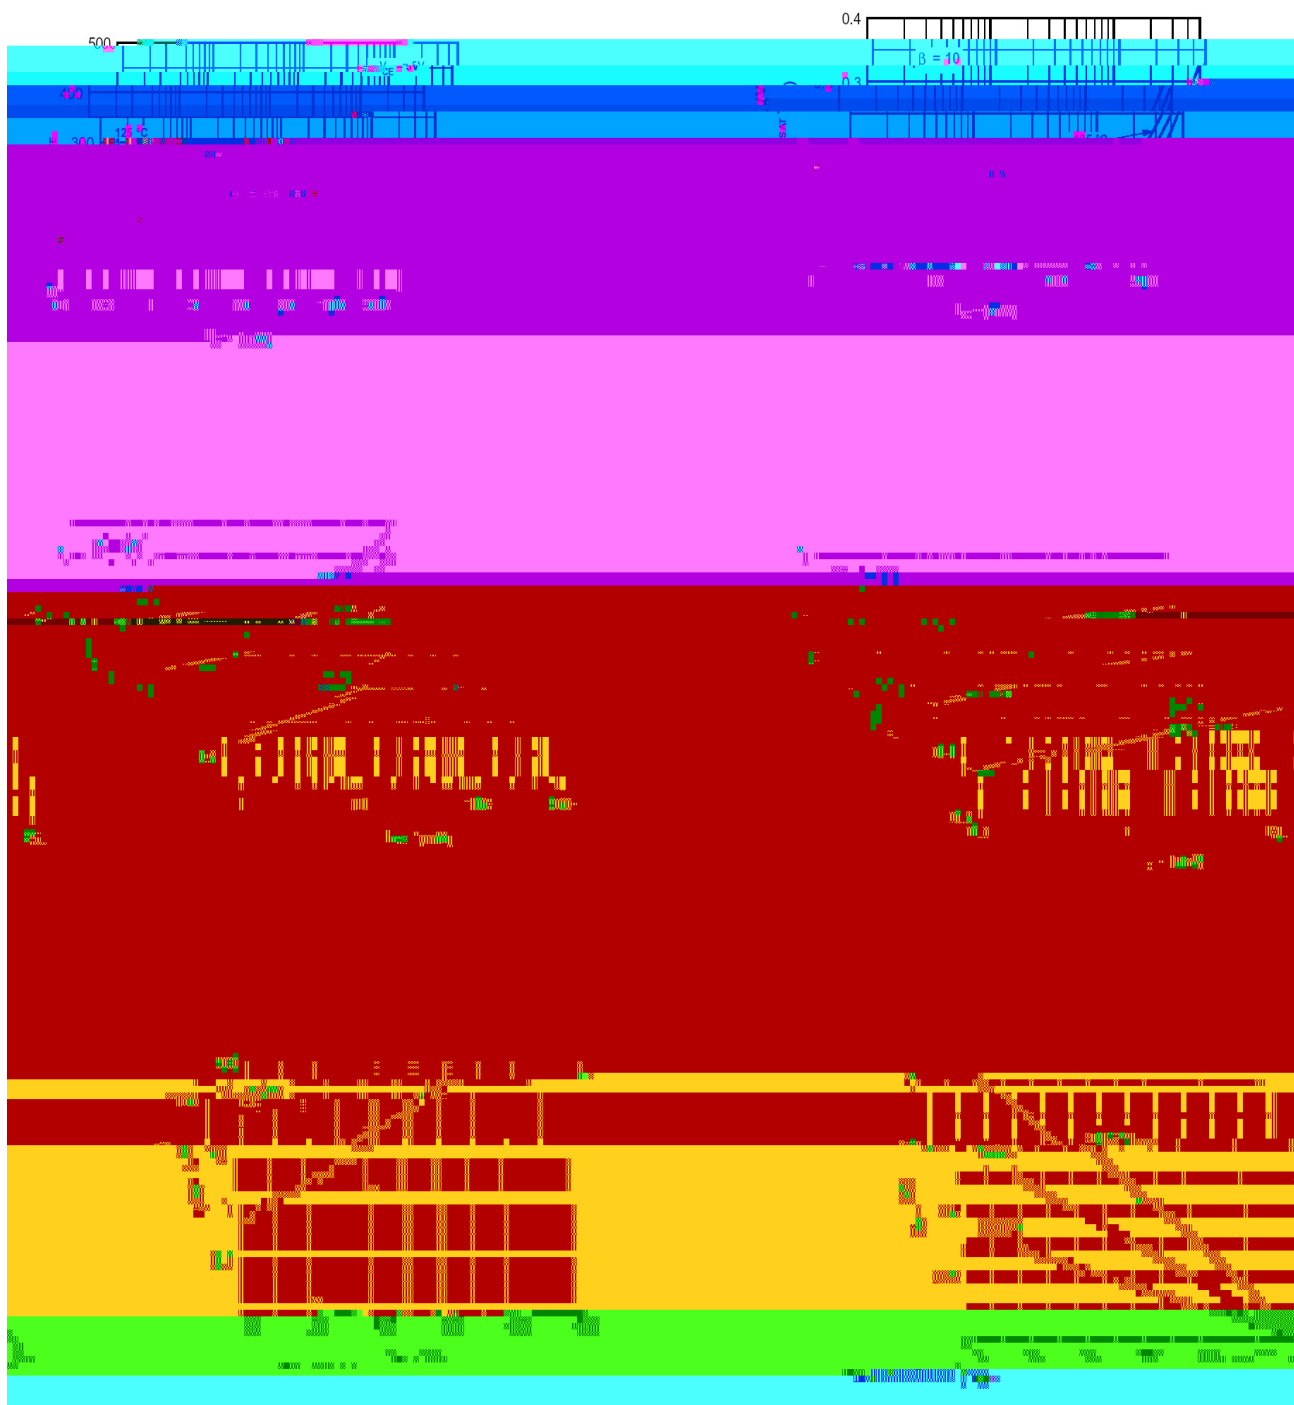

/ Package Dimensions


SOT-323

单位: mm

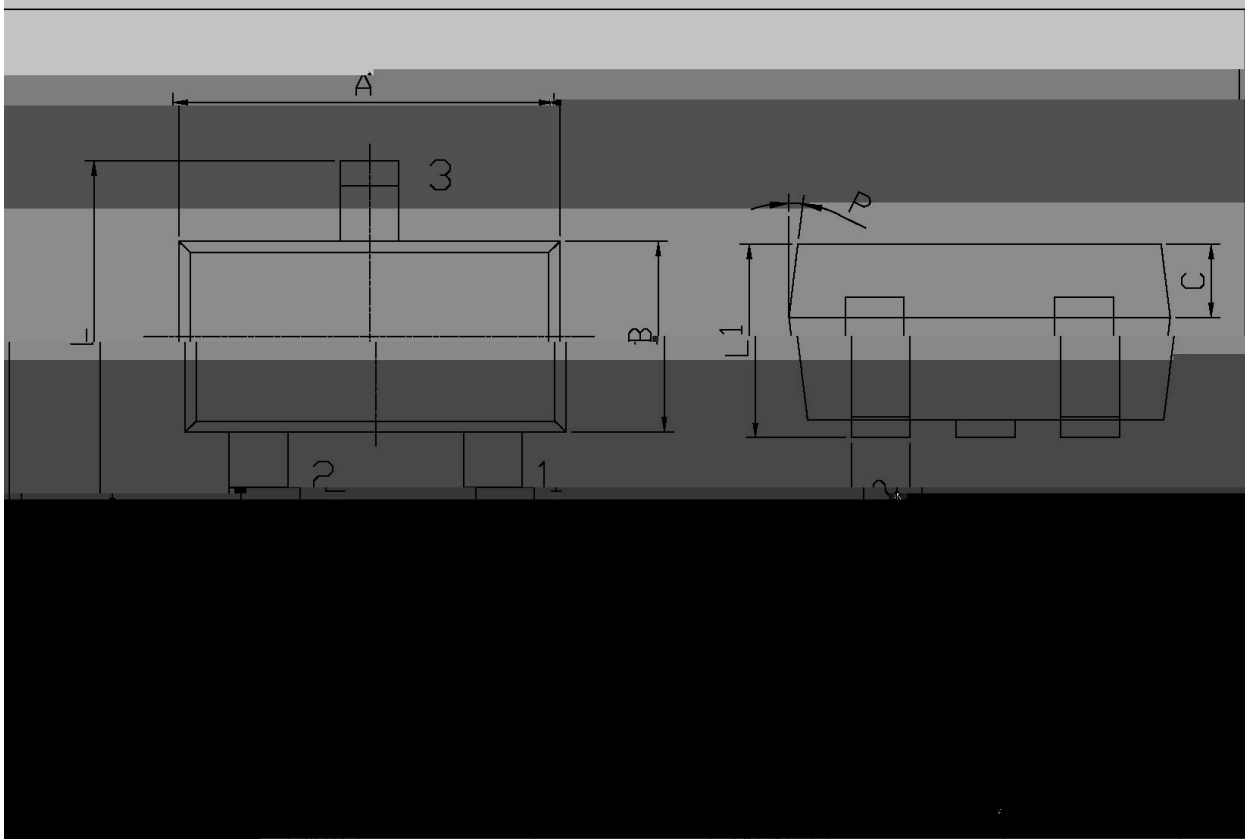

	Min	Max	Sym	Min	Max
A	1.95	2.35	C	0.30	0.50
L	2.00	2.2	L1	0.85	1.15
F _L	1.20	1.40	α	0.20	0.40
B	1.15	1.35	P		7°

/ Marking Instructions

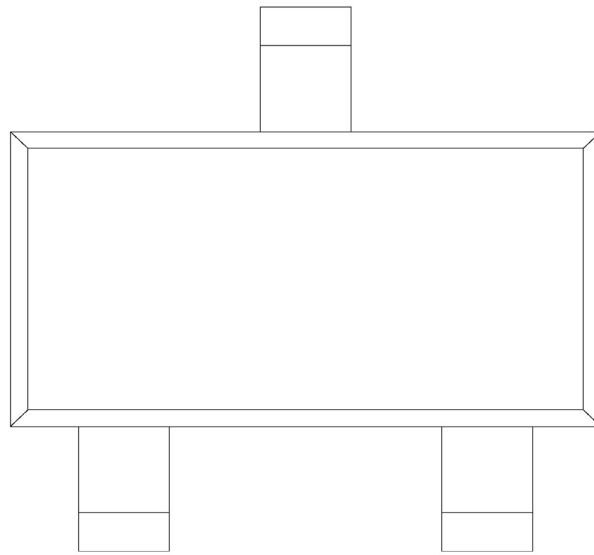

() / K\ d g\ iXk i\`Gif]`d`]fi`@`I`]\fn`Jfd` \i`e^ZGY\$=i\`z

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						Reel	Inner Box	Outer Box
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /			
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices