

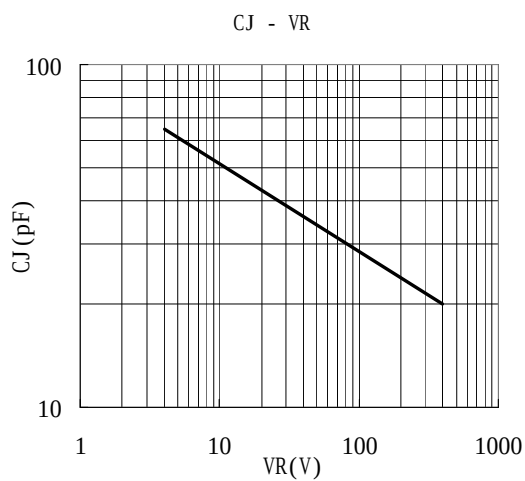
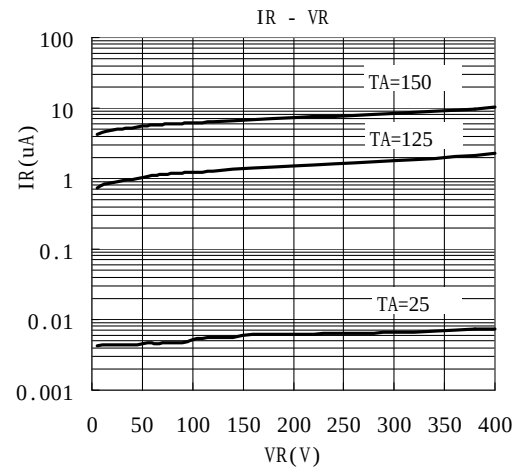
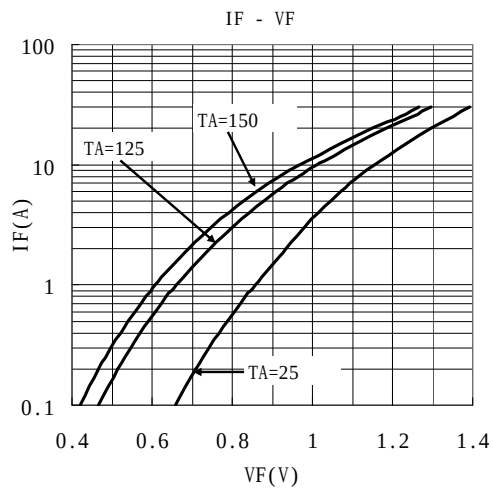
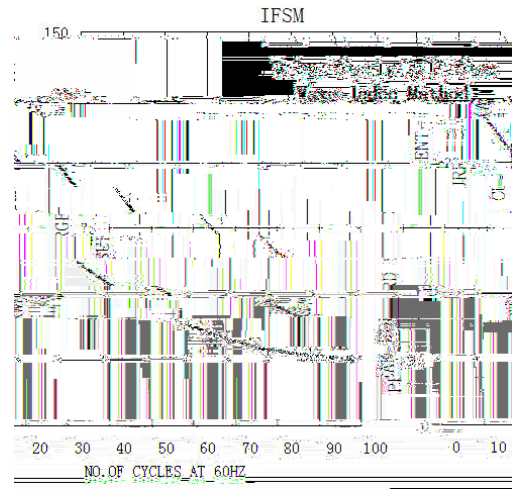


Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	400	V
Maximum RMS voltage	V_{RMS}	280	V
Maximum DC blocking Voltage	V_{DC}	400	V
Maximum Average Forward Rectified Current Peak Forward Surge Current,8.3ms	$I_{F(AV)}$	2x5	A

主要参数

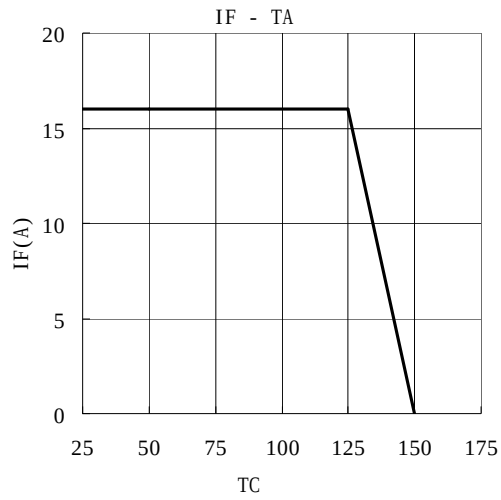

1. 2

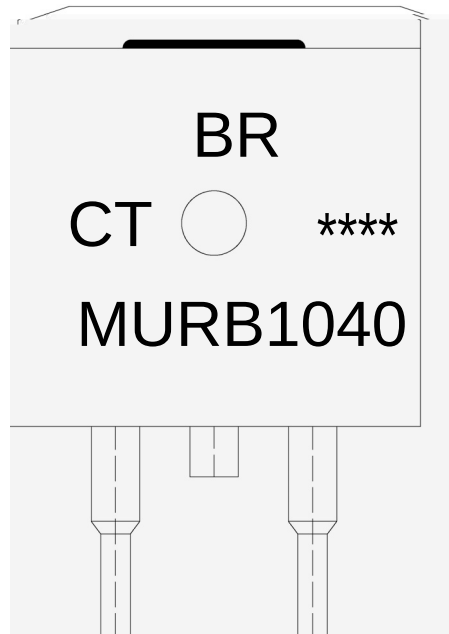

Note:

BR: Company Code

MURB1040: Product Type

CT: Internal Structure

****: Lot No. Code, code change with Lot No

测试条件

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

- 11501806090sec;

2245550.5sec;

3210/sec.
- Note:
1.Preheating:150~180, Time:60~90sec.
2.Peak Temp.:2455, Duration:50.5sec.
3. Cooling Speed: 2~10/sec.

测试条件

2605101 sec.Temp.:260±5Time:10±1 sec