

/ Descriptions

TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.

/ Features

 , 2SC1788
low $V_{CE(sat)}$, complementary pair with 2SC1788.

/ Applications

Audio frequency output amplifier.

/ Equivalent Circuit



/ Pinning









PIN1 Base PIN 2 Collector PIN 3 Emitter

/ hFE Classifications & Marking

h_{FE} Classifications Symbol	Q	R	S
h_{FE} Range	90~155	130~220	180~350

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-25	V
Collector to Emitter Voltage	V_{CEO}	-20	V
Emitter to Base Voltage	V_{EBO}	-7.0	V
Collector Current – Continuous(Pulse)	I_{CP}	-1.0	A
Collector Current - Continuous	I_C	-0.5	A
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T		


/ Electrical Characteristic Curve

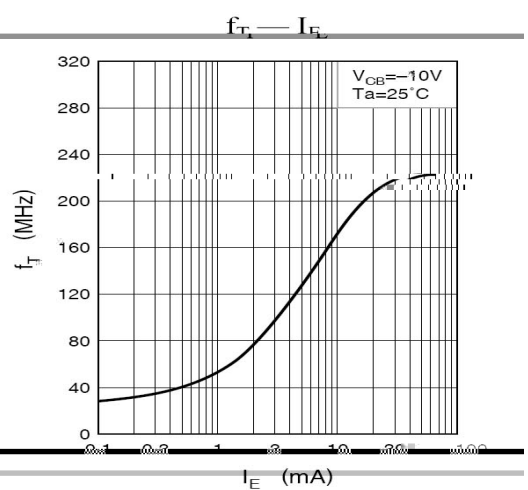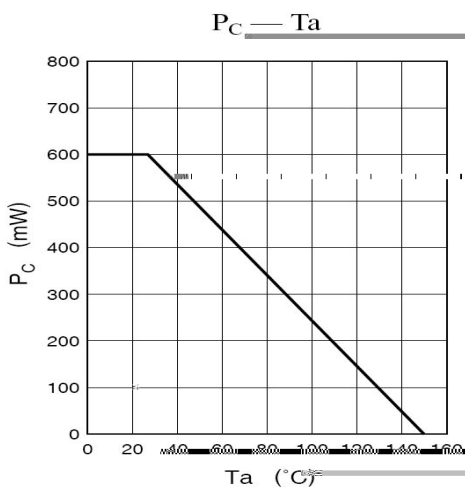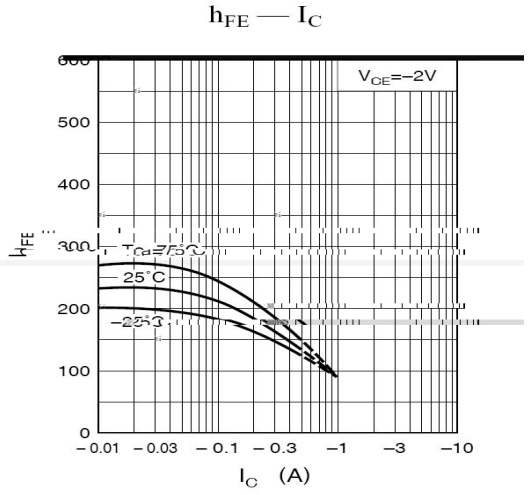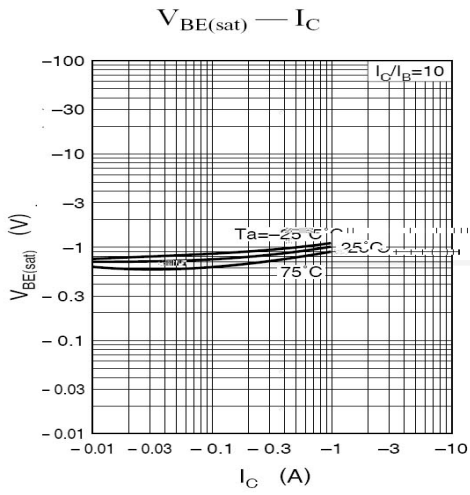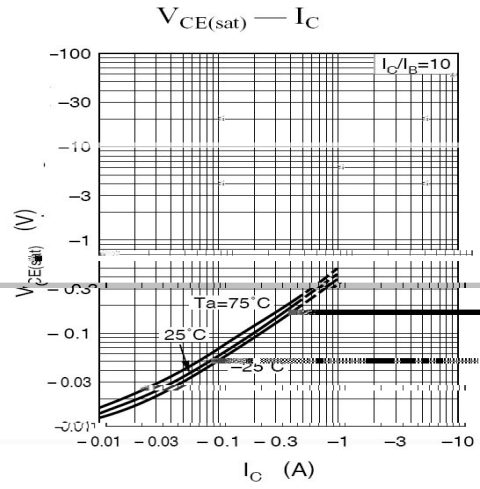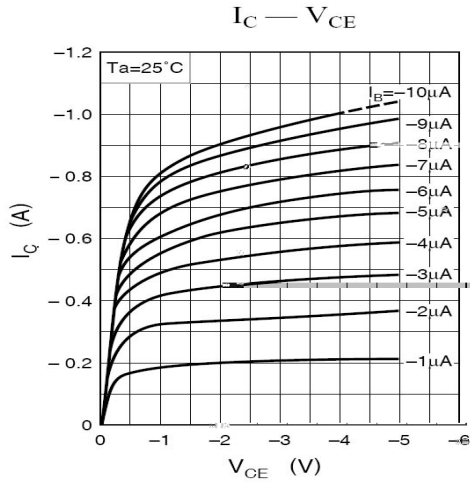

/ Package Dimensions

TO-92

Unit: mm

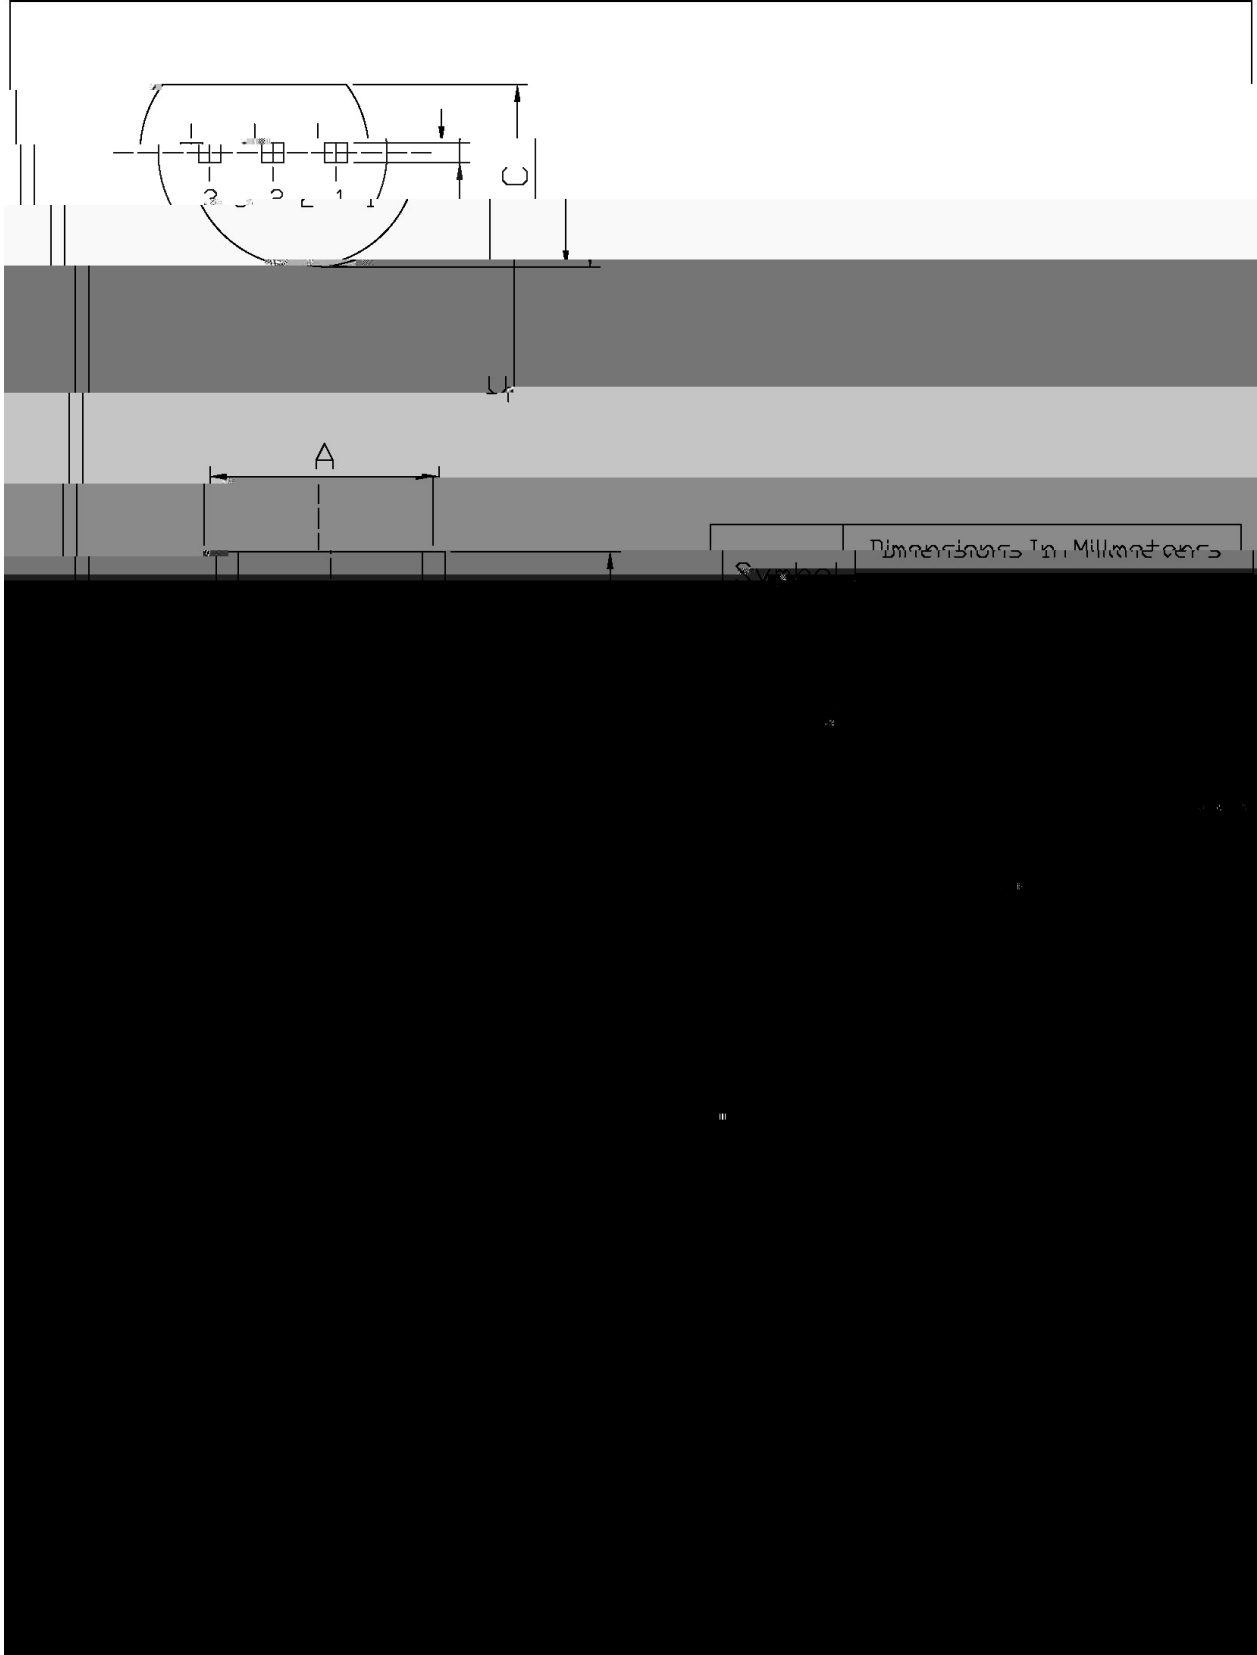

() / Temperature Profile for Dip Soldering(Pb-Free)



Note:

- | | | | | | |
|---|-------|-----|-----------|--------|--|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5± 0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10± 1 sec. Temp:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm3)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

T0-92